



SB,SBI,SBN 1,3,5,10,15,20,32,45,64,90,120,150 series

**Vertical Multistage Centrifugal
In-line Pumps**

50Hz



STAIRS INDUSTRIAL CO., LTD.

Contents

Vertical Multistage Centrifugal In-line Pumps



STAIRS PUMPS

page	General data
1	SB, SBI, SBN Performance range at 50Hz
2	Product data
3	Product data
4	Pump, Application
5	Identification Code, Nameplate information
6	Mechanical Seal , Minimum inlet pressure - NPSHA
7	Motor Data
8	Max. Operating Pressure and Inlet Pressures
9	Pumped Liquids
11	Construction

page	Performance curves / Technical data
14	SB, SBI, SBN 1
16	SB, SBI, SBN 3
20	SB, SBI, SBN 5
24	SB, SBI, SBN 10
28	SB, SBI, SBN 15
32	SB, SBI, SBN 20
36	SB, SBI, SBN 32
40	SB, SBI, SBN 45
42	SB, SBI, SBN 64
44	SB, SBI, SBN 90
46	SB, SBI, SBN 120
48	SB, SBI, SBN 150

Performance range


Vertical Multistage Centrifugal In-line Pumps



STAIRS PUMPS

SB, SBI, SBN Series

Performance range 50 Hz

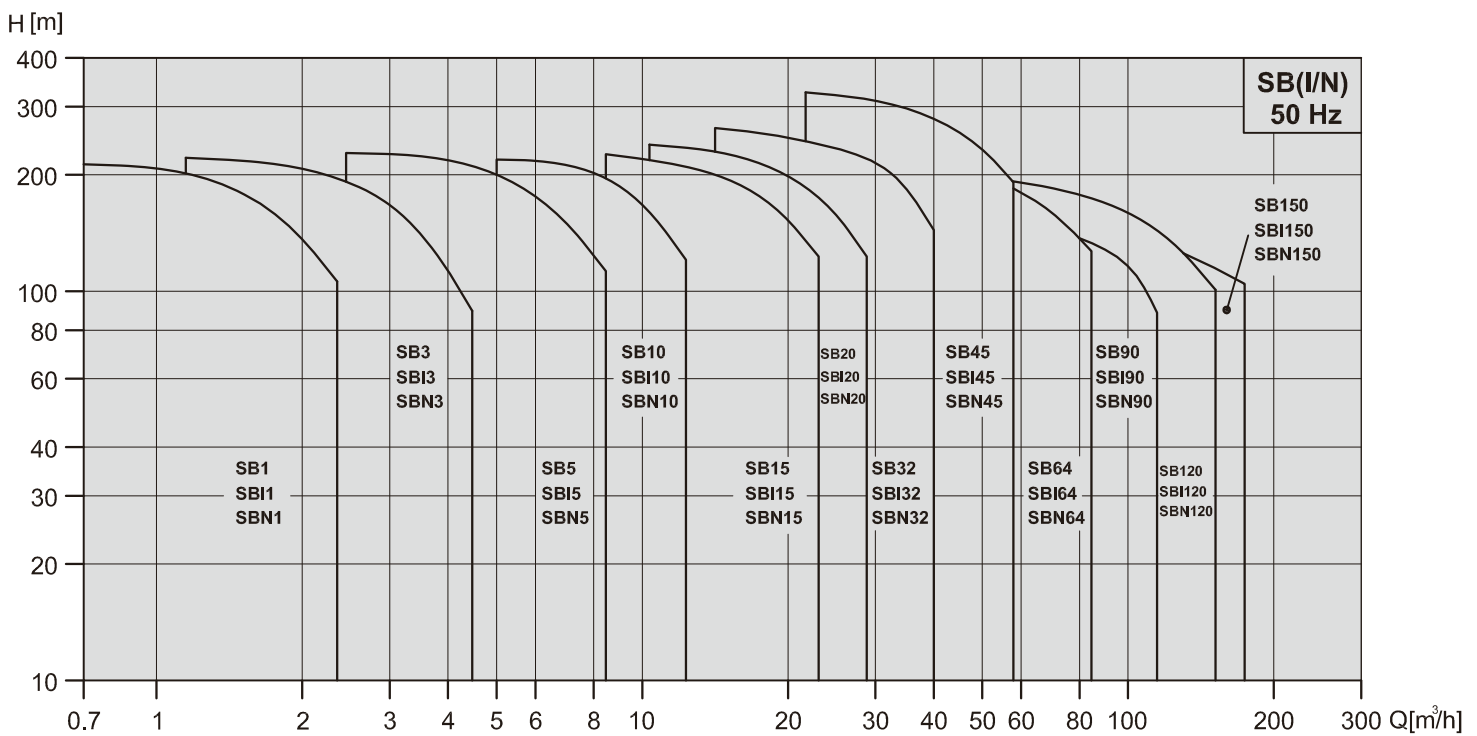

Product data

Vertical Multistage Centrifugal In-line Pumps



STAIRS PUMPS

Range	SB, SBI, SBN					
	1	3	5	10	15	20
50Hz						
Nominal flow [m ³ /h]	1.8	3	5.7	10	17	21
Flow range [m ³ /h]	0.7-2.4	1.2-4.5	2.5-8.5	5-13	8.5-23.5	10.5-29
Max. pressure [bar]	21.5	23	24	21.5	23	24.3
Fluid temperature [°C]	-15 to +120					
Motor power [kW]	0.37-2.2	0.37-3	0.37-5.5	0.37-7.5	1.1-15	1.1-18.5
Version						
SB: Cast iron and stainless steel EN 1.4301/AISI 304	•	•	•	•	•	•
SBI: Stainless steel EN 1.4301/AISI 304	•	•	•	•	•	•
SBN: Stainless steel EN 1.4401/AISI 316	•	•	•	•	•	•
Motor						
Mains connection 1~ [V/Hz] (Permissible voltage tolerance ± 10%)	220-240 V 50 Hz					
Mains connection 3~ [V/Hz] (Permissible voltage tolerance ± 10%)	0.37-7.5 kW 220-240/380-415 V 50 Hz From 11 kW 380-415 V 50 Hz					
Insulation class	F					
Enclosure class	IP 55					
Ambient temperature	50° C					
SB Pipe Connection						
Flange	DN 25/ DN 32	DN 25/ DN 32	DN 25/ DN 32	DN 40	DN 50	DN 50
SBI, SBN Pipe Connection						
Flange	DN 25/ DN 32	DN 25/ DN 32	DN 25/ DN 32	DN 40	DN 50	DN 50
Victaulic-connections	R 1 ¹ / ₄ DN32	R 1 ¹ / ₄ DN 32	R 1 ¹ / ₄ DN 32	R 2 DN 50	R 2 DN 50	R 2 DN 50
Mechanical Seals						
SiC/SiC	Standard					
Seals						
EPDM	Standard					
Viton						

* Flange standards : Refer to dimensional drawings

Product data

Vertical Multistage Centrifugal In-line Pumps



STAIRS PUMPS

50Hz

Range	SB, SBI, SBN					
	32	45	64	90	120	150
50Hz						
Nominal flow [m ³ /h]	30	45	64	90	120	150
Flow range [m ³ /h]	15-40	22-58	30-85	45-120	60-160	75-180
Max. pressure [bar]	27.5	33	21.8	20	20.4	18.7
Fluid temperature [°C]	-15 to +120					
Motor power [kW]	1.5-30	3-45	4-45	5.5-45	11-75	11-75
Version						
SB: Cast iron and stainless steel EN 1.4301/AISI 304	•	•	•	•	•	•
SBI: Stainless steel EN 1.4301/AISI 304	•	•	•	•	•	•
SBN: Stainless steel EN 1.4401/AISI 316	•	•	•	•	•	•
Motor						
Mains connection 1- [V/Hz] (Permissible voltage tolerance ± 10%)	0.37-2.2 kW 220-240 V					
Mains connection 3- [V/Hz] (Permissible voltage tolerance ± 10%)	0.37-2.2 kW 220-240 V / 380-415 V 3 - 22 kW 220-240 V / 380-415 V 3 - 22 kW 380-415 V / 660-720 V 30 - 75 kW 380-415 V / 660-720 V					
Insulation class	F					
Enclosure class	IP 55					
Ambient temperature	50 °C					
SB Pipe Connection						
Flange	DN 65	DN 80	DN100	DN100	DN125	DN125
SBI, SBN Pipe Connection						
Flange	DN 65	DN 80	DN100	DN100	DN125	DN125
Victaulic-connections	N/A	N/A	N/A	N/A	N/A	N/A
Mechanical Seals						
SiC/SiC	Standard					
Seals						
EPDM	Standard				0.37kW-45kW	
Viton					55kW-75kW	

* Flange standards : Refer to dimensional drawings

Product data

Vertical Multistage Centrifugal In-line Pumps



STAIRS PUMPS

Pump



The SB, SBI and SBN pumps are non-self priming vertical multistage pump of in-line design, flange or with Victaulic coupling with equally sized suction and discharge ports. Stage construction with stainless steel impellers, chambers and pressure casing. Pump stub shaft and motor shaft of the IEC-standards motor are directly close coupled. All pumps are equipped with a cartridge type mechanical seal for easy maintenance.

SB, SBI and SBN pumps have different pump sizes and various numbers of stages to provide the flow and the pressure required.

Applications

WATER SUPPLY AND PRESSURE BOOSTING

Pressure boosting in buildings, hotels, residential complexes
Pressure booster stations, supply of water networks
Pressure boosting for industrial water supply

IRRIGATION AND AGRICULTURE

Greenhouses
Sprinkler irrigation
Field irrigation (flooding)

LIGHT INDUSTRY

Washing and cleaning systems
Car washing facilities
Fire fighting systems
Process water systems
Machine tools (cooling lubricants)

WATER TREATMENT

Water softeners and de-mineralization
Reverse Osmosis systems
Distillation systems
Filtration
Ultra-filtration systems

HEATING, VENTILATION AND AIR-CONDITIONING

Boilers
Induction heating
Heat exchangers
Refrigerators
Cooling towers and systems
Temperature control systems

Product data


Vertical Multistage Centrifugal In-line Pumps



STAIRS PUMPS

Identification Code

SB - 10 - 5 - 1 - S Q Q E

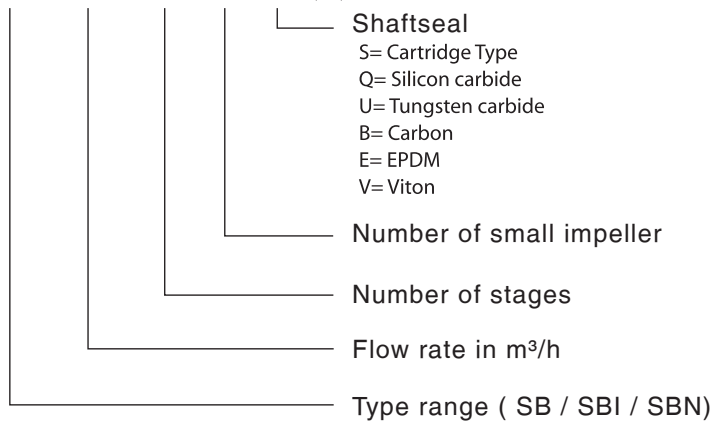

Pump nameplate information

Type	①				
Model	②				
f	③	Hz	P2	④	kW
n	⑤	min ⁻¹	H _{max}	⑥	m
Q	⑦	m ³ /h	H	⑧	m
p _{max} /t _{max}	⑨		bar/°C	⑩	
Serial No.	⑪				

CE

- ① Pump Type - Seal Type
- ② Pump Model
- ③ Frequency
- ④ Rated Power
- ⑤ Speed
- ⑥ Maximum Head
- ⑦ Capacity
- ⑧ Head Range
- ⑨ Max. Operating Pressure / Max. temperature
- ⑩ Rotating Direction
- ⑪ Serial number

Motor nameplate information

STAIRS		INDUCTION MOTOR		CE	
TYPE	②	FR.	③	POLES 2	IEC 60034
OUTPUT	④	HP	kW	RATING CONT. INS.	⑤
⑦ Hz	△	⑧	V	⑨	A E.F.F.% ⑩
	Y		V	A	rpm ⑪
BEARINGS	⑫			WEIGHT	kg
SER.NO.	⑬			DATE	

- ① Phase
- ② Motor Model
- ③ Frame
- ④ Rated Power
- ⑤ Insulation
- ⑥ International Protection
- ⑦ Frequency
- ⑧ Voltage
- ⑨ Ampere
- ⑩ Efficiency
- ⑪ Revolutions Per Minute
- ⑫ Bearing type
- ⑬ Serial number

Product data

Vertical Multistage Centrifugal In-line Pumps



STAIRS PUMPS

Mechanical Seal

Standard Cartridge type mechanical seal made of Silicon Carbide/Silicon Carbide/EPDM or Viton. Based on the type of application, alternative materials are available for the seal and the elastomers. The cartridge type mechanical seal can be replaced in minutes without special tools and without dismantling the pump.



List of Materials

Q : Silicon carbide	E : EPDM
U : Tungsten carbide	V : Viton
B : Carbon	

Type of Seal

Seal Type	SB/SBI/SBN		
	1/3/5/10/15/20 /32/45/64/90	120/150	
		0.5-60HP	75-100HP
Mechanical Seals			
S: O-ring seal Cartridge type	●	●	
B: Rubber bellows seal Cartridge type			●
QQ	●	●	●
UU	Optional	Optional	
QB	Optional	Optional	
UB	Optional	Optional	
Seals			
E	●	●	●
V	Optional	Optional	Optional

Minimum inlet pressure - NPSHA

Calculation of the inlet pressure "H" is recommended in these situations:

- The liquid temperature is high.
- The flow is significantly higher than the rated flow.
- Water is drawn from depths.
- Water is drawn through long pipes.
- Inlet conditions are poor.

To avoid cavitation, make sure that there is a minimum pressure on the suction side of the pump. The maximum suction lift "H" in feet can be calculated as follows:

$$H = P_b - \text{NPSHR} - H_f - H_v - H_s$$

P_b = Barometric pressure in feet absolute. (Barometric pressure can be set to 33.9 feet. At sea level. In closed systems, p_b indicates system pressure in feet.)

NPSHR = Net Positive Suction Head Required in feet. (To be read from the NPSHR curve at the highest flow the pump will be delivering).


H_f = Friction loss in suction pipe in feet. (At the highest flow the pump will be delivering.)

H_v = Vapor pressure in feet. (To be read from the vapor pressure scale. " H_v " depends on the liquid temperature " T_m ").

H_s = Safety margin = minimum 2.0 feet.

If the "H" calculated is positive, the pump can operate at a suction lift of maximum "H" feet.

If the "H" calculated is negative, an inlet pressure of minimum "H" feet is required.

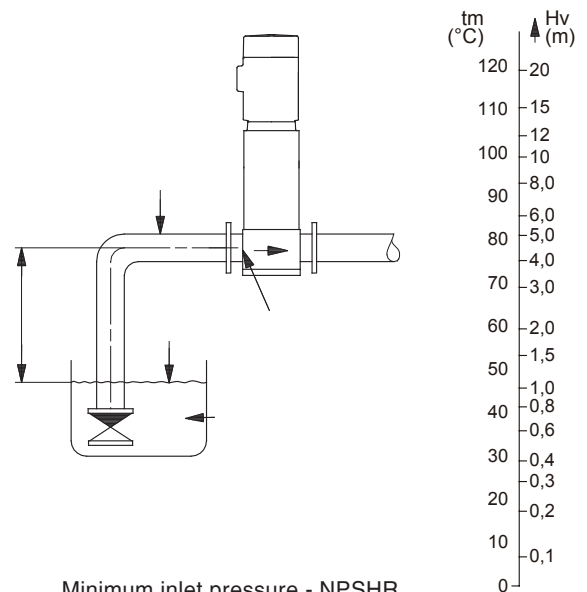

Minimum inlet pressure - NPSHR

Note: In order to avoid cavitation **never**, select a pump whose duty point lies too far to the right on the NPSHR curve.

Always check the NPSHR value of the pump at the highest possible flow.

Motor Data

Vertical Multistage Centrifugal In-line Pumps



STAIRS PUMPS

Motor

- Squirrel cage in short circuit, aluminum casing up to 22 kW, totally enclosed, fan-cooled, 2-pole standard motor.
- Electrical data
 - ⊙ Enclosure class: IP55
 - ⊙ Insulation class: F
- The motors have efficiency values that fall within the range normally referred to as high efficiency.
- Ambient temperature: Max. +50°C

Motor Data

50Hz

Motor Type				Nominal current in [A]					
Pole	HP	kW	Flange	Frame	1Ø	3Ø		3Ø	
					220-240V	△220-240V	Y 380-415V	△380-415V	Y 660-720V
2	0.5	0.37	B14	71A	2.5 - 2.5	1.7 - 1.9	1.0 - 1.1	-----	-----
	0.75	0.55		71B	4.0 - 3.5	2.6 - 2.9	1.5 - 1.7	-----	-----
	1.0	0.75		80A	5.1 - 4.1	3.4 - 3.4	2.0 - 2.0	-----	-----
	1.5	1.1		80B	8.0 - 6.9	4.8 - 5.0	2.8 - 2.9	-----	-----
	2.0	1.5		90S	9.5 - 8.9	6.2 - 6.6	3.6 - 3.8	-----	-----
	3.0	2.2		90L	13.4 - 12.7	8.8 - 9.4	5.1 - 5.4	-----	-----
	4.0	3.0		100L	-----	11.8 - 12.3	6.8 - 7.1	6.8 - 6.9	3.9 - 4.0
	5.5	4.0		112M	-----	15.1 - 15.2	8.7 - 8.8	8.7 - 8.3	5.0 - 4.8
	7.5	5.5		B5	132S	-----	18.7 - 18.0	10.8 - 10.4	10.9 - 10.8
	10	7.5	132S		-----	25.5 - 24.9	14.7 - 14.4	14.9 - 14.8	8.6 - 8.5
	15	11	160M		-----	38.8 - 39.1	22.4 - 22.6	22.9 - 23.8	13.2 - 13.7
	20	15	160M		-----	49.3 - 46.5	28.5 - 26.9	24.9 - 29.0	16.9 - 16.7
	25	18.5	160L		-----	60.2 - 55.4	34.8 - 32.0	35.2 - 33.5	20.3 - 19.3
	30	22	180M		-----	71.3 - 67.5	41.2 - 39.0	41.3 - 39.6	23.8 - 22.8
	40	30	200L		-----	-----	-----	55.4 - 50.7	31.9 - 29.2
	50	37	200L		-----	-----	-----	67.7 - 62.0	39.0 - 35.7
	60	45	225M		-----	-----	-----	82.3 - 75.4	47.4 - 43.4
	75	55	250M		-----	-----	-----	101 - 92.5	58.2 - 53.3
	100	75	280S	-----	-----	-----	134 - 123	77.2 - 70.7	

Max. Operating Pressure and Inlet Pressures

Vertical Multistage Centrifugal In-line Pumps



STAIRS PUMPS

Maximum inlet pressure

The following table shows the maximum permissible inlet pressure. However, the current inlet pressure + the pressure against a closed valve must always be lower than the maximum permissible operating pressure.

If the maximum permissible operating pressure is exceeded, the bearing in the motor may be damaged and the life of the shaft seal reduced.

* Rule to follow : The inlet pressure+ the pressure against a closed valve < Max. Operating pressure.

50Hz

Pump type	Stages	Max. Operating Pressure	Stages	Max. Inlet Pressures
SB(I/N) 1	2 - 36	25 bar	2 - 36	10 bar
SB(I/N) 3	2 - 36	25 bar	2 - 29	10 bar
			31 - 36	15 bar
SB(I/N) 5	2 - 36	25 bar	2 - 16	10 bar
			18 - 36	15 bar
SB(I/N) 10	1 - 16	16 bar	1 - 6	8 bar
	17 - 22	25 bar	7 - 22	10 bar
SB(I/N) 15	1 - 10	16 bar	1 - 3	8 bar
	12 - 17	25 bar	4 - 17	10 bar
SB(I/N) 20	1 - 10	16 bar	1 - 3	8 bar
	12 - 17	25 bar	4 - 17	10 bar
SB(I/N) 32	(1-1) - 7	16 bar	(1-1) - 4	4 bar
	(8-2) - 14	30 bar	(5-2) - 10	10 bar
			(11-2) - 14	15 bar
SB(I/N) 45	(1-1) - 5	16 bar	(1-1) - 2	4 bar
	(6-2) - 11	30 bar	(3-2) - 5	10 bar
	(12-2) - (13-2)	33 bar	(6-2) - (13-2)	15 bar
SB(I/N) 64	(1-1) - 5	16 bar	(1-1) - (2-2)	4 bar
	(6-2) - (8-1)	30 bar	(2-1) - (4-2)	10 bar
			(4-1) - (8-1)	15 bar
SB(I/N) 90	(1-1) - 4	16 bar	(1-1) - 1	4 bar
	(5-2) - 6	30 bar	(2-1) - (3-2)	10 bar
			3 - 6	15 bar
SB(I/N) 120	1 - 7	30 bar	1 - (2-1)	10 bar
			2 - (5-1)	15 bar
			(6-1) - 7	20 bar
SB(I/N) 150	(1-1) - 6	30 bar	(1-1) - 1	10 bar
			(2-1) - (4-2)	15 bar
			(5-2) - 6	20 bar

Example of operating and inlet pressures

The values for operating and inlet pressures shown in the tables must not be considered individually but must always be compared, see the following examples:

Example 1:

The following pump type has been selected: SB 3-29

Max. operating pressure: 25 bar

Max. inlet pressure: 10 bar

Discharge pressure against a closed valve: 18.6 bar , (see p.16)

This pump is not allowed to start at an inlet pressure of 10 bar ,

but at an inlet pressure of 25 bar - 18.6 bar = 6.4 bar.

Example 2:

The following pump type has been selected: SB 10-2

Maximum operating pressure: 16 bar.

Maximum inlet pressure: 8 bar.

Discharge pressure against a closed valve: 2 bar. (See p.16)

This pump is allowed to start at an inlet pressure of 8 bar,

as the discharge pressure against a closed valve is only 2 bar, which results in an operating pressure of 8 bar + 2 bar = 10 bar.

On the contrary, the maximum operating pressure of this pump is limited to 16 bar as a higher operating pressure will require an inlet pressure of more than 8 bar.



Pumped Liquids

SB (I, N) pumps can handle a wide variety of liquids, each with its own characteristic.

SB(I)

Non-corrosive liquids

For fluid transfer, circulation and pressure boosting of cold or hot clean water.

SBN

Industrial liquids

Light acids

The fluids covered in the list are not complete. Data on the application limits of different pump materials when handling any of the listed fluids are considered to be the best choices. However, the table is intended as a general guide only, and cannot replace actual testing of the pumped fluids and pump materials under specific working conditions.

When choosing the pump version, sufficient attention should be given to the flow medium, such as density, solidification point, viscosity as well as ex-protection requirement. The limits of applicability of the pumps, based on pressure and temperature must also be considered.

● Recommended

Pumped fluid	"Fluid Concentration, temperature"	SB (I)		SBN	
		EPDM	Viton	EPDM	Viton
Acetic acid anhydride	25°C			●	
Alkaline cleaner		●			
Aluminium sulphate	10%, 25°C				●
Ammonia water (A. hydroxide)	20%, 40°C	●			
Ammonia hydrogen carbonate	10%, 40°C	●		●	
Benzoic acid	10%, 90°C				●
Boric acid	Unsaturated solution, 60°C				●
Butanol	60°C	●			
Calcium acetate	30%, 50°C	●			
Calcium hydroxide	Saturated solution, 50°C	●			
Chromic acid	1%, 20°C				●
Condensate	90°C	●			
Copper sulphate	Unsaturated solution, 60°C				●
Deionic (fully desalinated water)	50°C			●	
Ethanol	100%, 20°C	●			
Ethylene glycol/Diethylene glycol	40%, 70°C	●	●	●	●
Fixer	25°C				●
Formic acid	5%, 20°C			●	

Technical data

Vertical Multistage Centrifugal In-line Pumps



STAIRS PUMPS

Pumped fluid	"Fluid Concentration, temperature"	SB (I)		SBN	
		EPDM	Viton	EPDM	Viton
Fruit juice	50°C				●
Glycerine	50%, 50°C	●			
Heating oil (Light)		●			●
Hydraulic oil	100%, 100°C		●		
Isopropanol		●			
Lactic acid	10%, 20°C				●
Linoleic acid	100%, 20°C	●			
Linseed oil	60°C		●		
Liqueur	60°C				●
Maize oil	80°C		●		
Maleic acid	50%, 50°C				●
Methanol	100%, 20°C	●			
Motor oil	100%, 80°C	●			
Oil-water-mixture	100°C		●		
Oxalic acid	1%, 20°C			●	
Peanut oil	100%, 80°C		●		
Phosphoric acid	20%, 20°C			●	
Polyglycols	90°C		●		●
Polyethylene glycols	40%, 70°C	●			
Potassium carbonate	10%, 60°C	●			
Potassium hydrogen carbonate	10%, 60°C	●			
Potassium permanganate	5%, 20°C			●	
Potassium sulphate	Unsaturated solution, 80°C			●	
Rapeseed oil	100%, 80°C		●		
Silicone oil	100%		●		
Sodium carbonate	10%, 60°C			●	
Sodium hydroxide	25%, 50°C			●	
Sodium nitrate	Unsaturated solution, 80°C			●	
Sodium phosphate	5%, 100°C			●	
Sodium sulphate	10%, 60°C			●	
Sulphuric acid	5%, 25°C				●
Water					
Swimming pool water	35°C	● SBI		●	
Deionic	50°C			●	
Distilled water	50°C			●	
Decarbonated water				●	
Soft water				●	
Heating water				●	
Boiler water				●	
Pure water				●	
Rinsing water		● SBI		●	


Construction

Vertical Multistage Centrifugal In-line Pumps




STAIRS PUMPS

SB-1,3,5,10,15,20

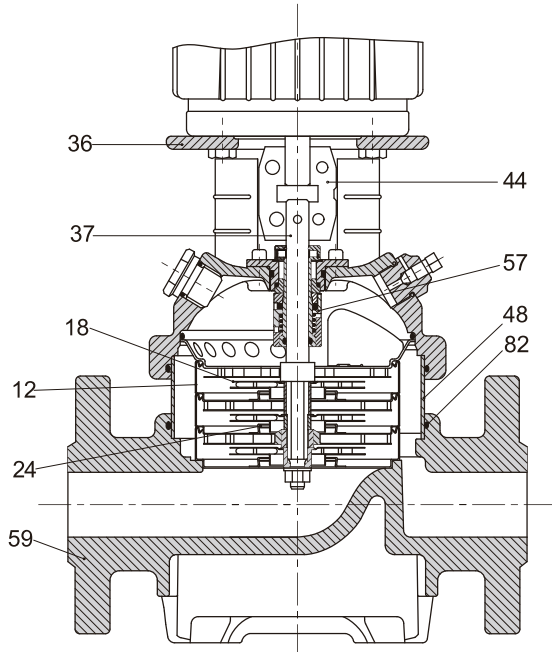

SBI(N)-1,3,5,10,15,20

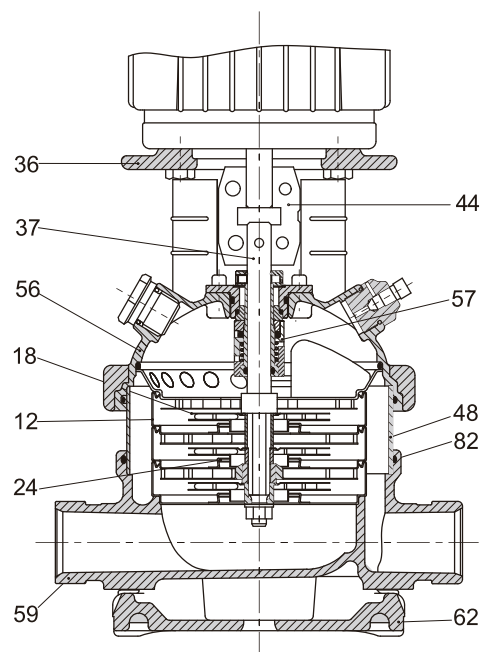

CONSTRUCTION

Pos.	Name	Material	SB 1,3,5,10,15,20		SBI 1,3,5,10,15,20		SBN 1,3,5,10,15,20	
			Standard		Standard		Standard	
			Europe	USA	Europe	USA	Europe	USA
36	Pump head	Cast Iron	EN-GJL-200	ASTM 25B	EN-GJS-450-10	ASTM 65-45-12	EN-GJS-450-10	ASTM 65-45-12
56	Pump head cover	Stainless steel	N/A		1.4301	AISI 304	1.4401	AISI 316
18	Impeller	Stainless steel	1.4301	AISI 304	1.4301	AISI 304	1.4401	AISI 316
37	Shaft	Stainless steel	1.4057	AISI 431	1.4057	AISI 431	1.4401	AISI 316
48	Outer Sleeve	Stainless steel	1.4301	AISI 304	1.4301	AISI 304	1.4401	AISI 316
82	O-ring for outer sleeve	EPDM						
12	Chamber	Stainless steel	1.4301	AISI 304	1.4301	AISI 304	1.4401	AISI 316
24	Neck ring	PTFE						
59	Base	Cast Iron	EN-GJL-200	ASTM 25B	N/A			
	Base	Stainless steel	N/A		1.4301	AISI 304	1.4401	AISI 316
62	Base plate	Cast Iron	N/A		EN-GJL-200	ASTM 25B	EN-GJL-200	ASTM 25B
44	Coupling	Fe-Cu-C	SINT C11	MPIF FC0525	SINT C11	MPIF FC0525	SINT C11	MPIF FC0525
57	Mechanical seal	Cartridge type						


Construction

Vertical Multistage Centrifugal In-line Pumps




STAIRS PUMPS

SB-32,45,64,90

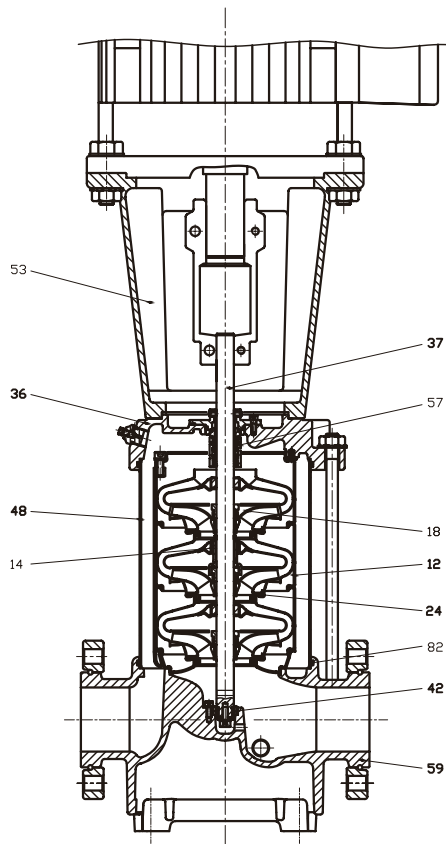

SBI(N)-32,45,64,90

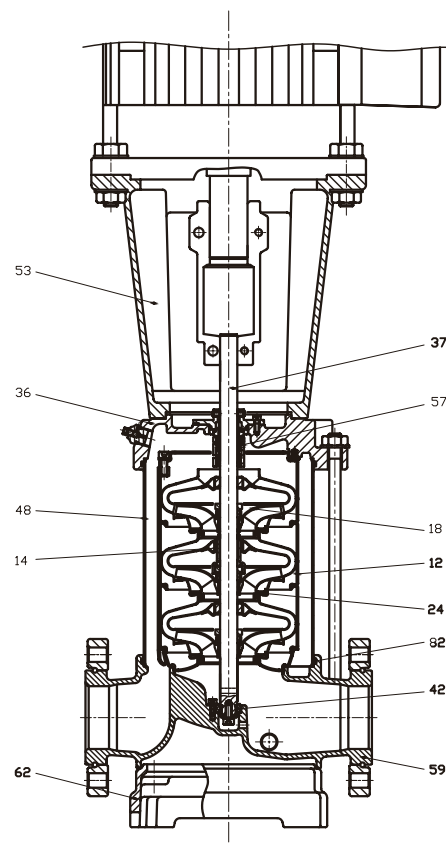

CONSTRUCTION

Pos.	Name	Material	SB 32, 45, 64, 90		SBI 32, 45, 64, 90		SBN 32, 45, 64, 90	
			Standard		Standard		Standard	
			Europe	USA	Europe	USA	Europe	USA
36	Pump head	Cast Iron	EN-GJL-250	ASTM 35B				
		Stainless steel			1.4301	AISI 304	1.4401	AISI 316
53	Motor Bracket	Cast Iron	EN-GJL-250	ASTM 35B	EN-GJL-250	ASTM 35B	EN-GJL-250	ASTM 35B
18	Impeller	Stainless steel	1.4301	AISI 304	1.4301	AISI 304	1.4401	AISI 316
37	Shaft	Stainless steel	1.4057	AISI 431	1.4057	AISI 431	1.4401	AISI 316
48	Outer Sleeve	Stainless steel	1.4301	AISI 304	1.4301	AISI 304	1.4401	AISI 316
82	O-ring for outer sleeve	EPDM						
12	Chamber	Stainless steel	1.4301	AISI 304	1.4301	AISI 304	1.4401	AISI 316
24	Neck ring	Carbon Fiber + POB + PTFE						
59	Base	Cast Iron	EN-GJL-250	ASTM 35B	N/A			
	Base	Stainless steel	N/A		1.4301	AISI 304	1.4401	AISI 316
62	Base plate	Cast Iron	N/A		EN-GJL-250	ASTM 35B	EN-GJL-250	ASTM 35B
57	Mechanical seal	Cartridge type						
14	Bearing ring		Bronze				POB+Graphite+PTFE	
42	Bottom bearing ring	Tungsten carbide/ Tungsten carbide						


Construction

Vertical Multistage Centrifugal In-line Pumps




STAIRS PUMPS

SB-120,150

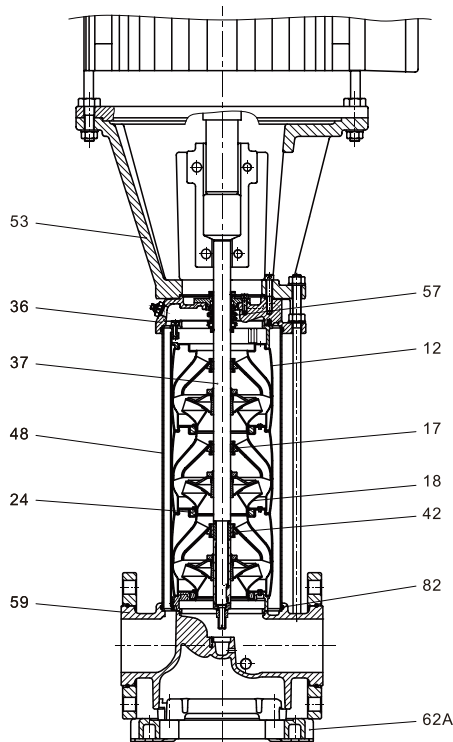

SBI/N-120,150



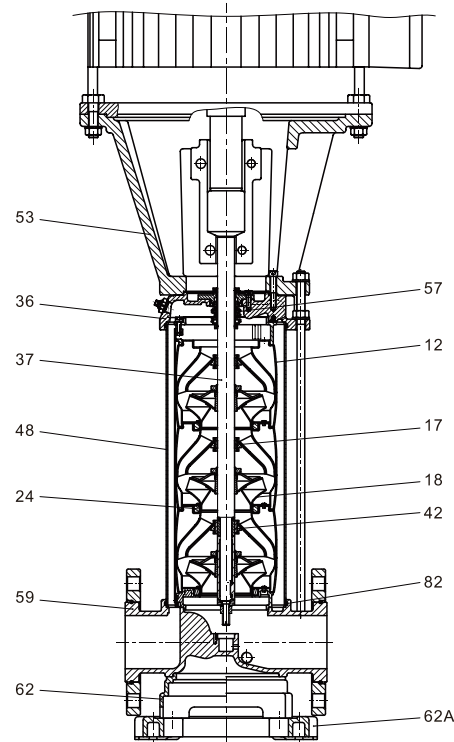


CONSTRUCTION

Pos.	Name	Material	SB 120, 150		SBI 120, 150		SBN 120, 150	
			Standard		Standard		Standard	
			Europe	USA	Europe	USA	Europe	USA
36	Pump head	Cast Iron	EN-GJL-250	ASTM 35B	N/A			
		Stainless steel	N/A		1.4301	AISI 304	1.4401	AISI 316
53	Motor bracket (15HP~60HP)	Cast Iron	EN-GJL-250	ASTM 35B	EN-GJL-250	ASTM 35B	EN-GJL-250	ASTM 35B
	Motor bracket (75HP~100HP)	Cast Iron	EN-GJS-450-10	ASTM 65-45-12	EN-GJS-450-10	ASTM 65-45-12	EN-GJS-450-10	ASTM 65-45-12
17	bearing ring	PTFE						
18	Impeller	Stainless steel	1.4301	AISI 304	1.4301	AISI 304	1.4401	AISI 316
37	Shaft	Stainless steel	1.4057	AISI 431	1.4057	AISI 431	1.4401	AISI 316
48	Outer sleeve	Stainless steel	1.4301	AISI 304	1.4301	AISI 304	1.4401	AISI 316
82	O-ring for outer sleeve	EPDM						
12	Chamber	Stainless steel	1.4301	AISI 304	1.4301	AISI 304	1.4401	AISI 316
24	Neck ring	PTFE						
59	Base	Cast Iron	EN-GJL-250	ASTM 35B	N/A			
		Stainless steel	N/A		1.4301	AISI 304	1.4401	AISI 316
62	Base plate	Cast Iron	N/A		EN-GJS-450-10	ASTM 65-45-12	EN-GJS-450-10	ASTM 65-45-12
62A	Base plate	Cast Iron	EN-GJS-450-10	ASTM 65-45-12	EN-GJS-450-10	ASTM 65-45-12	EN-GJS-450-10	ASTM 65-45-12
57	Mechanical seal	Cartridge type						
42	Bottom bearing ring	SiC / SiC						



SB, SBI, SBN 1

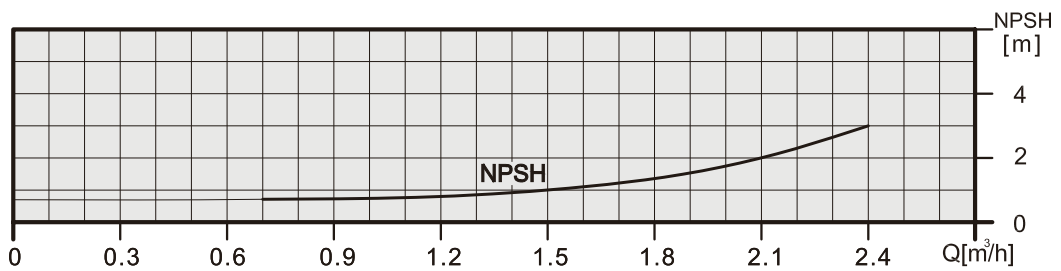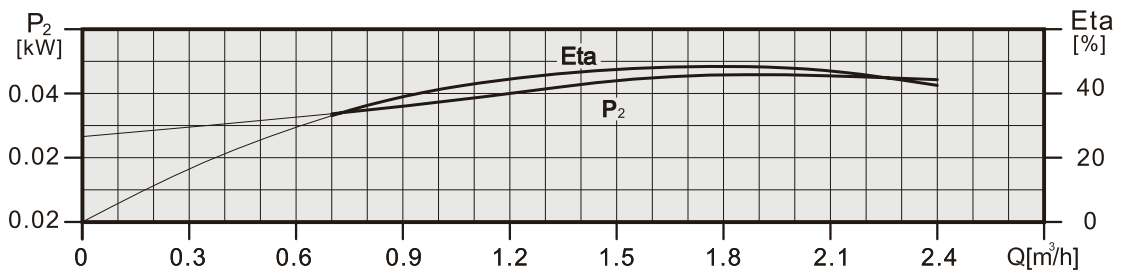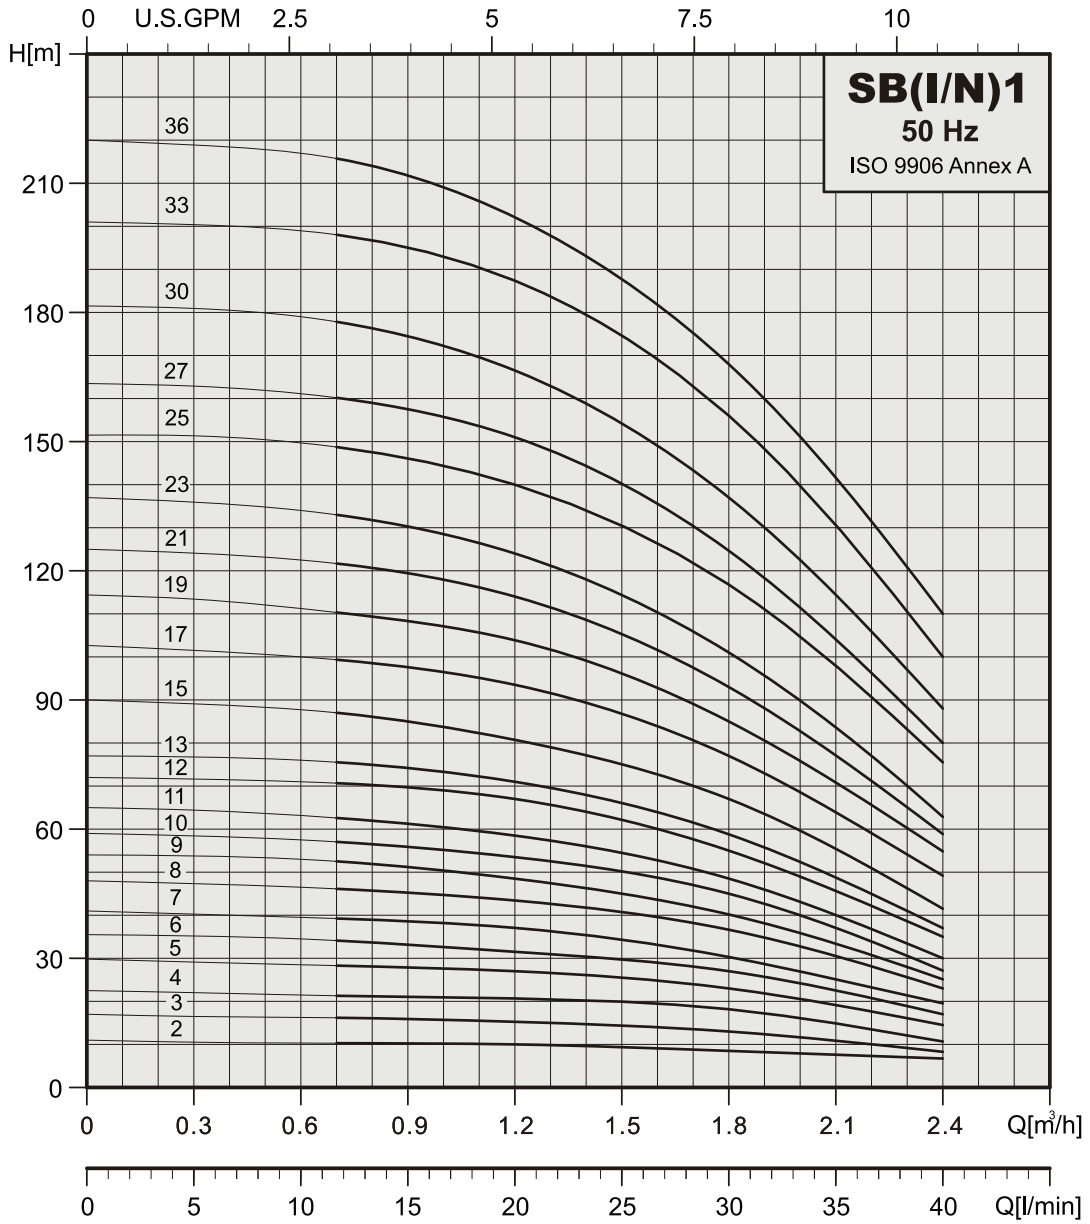




SB 1

50Hz	Motor		Nominal current [A]			Dimension[mm]				Net weight [kg]
	P ₂		1ø	3ø		DIN flange		D1	D2	
	[kW]	[HP]	220-240V	△220-240V	Y380-415V	H1	H2			DIN flange
SB1-2	0.37	0.5	2.5-2.5	1.7-1.9	1.0-1.1	279	474	141	115	23.4
SB1-3	0.37	0.5	2.5-2.5	1.7-1.9	1.0-1.1	279	474	141	115	23.4
SB1-4	0.37	0.5	2.5-2.5	1.7-1.9	1.0-1.1	297	492	141	115	23.8
SB1-5	0.37	0.5	2.5-2.5	1.7-1.9	1.0-1.1	315	510	141	115	24.2
SB1-6	0.37	0.5	2.5-2.5	1.7-1.9	1.0-1.1	333	528	141	115	24.5
SB1-7	0.37	0.5	2.5-2.5	1.7-1.9	1.0-1.1	351	546	141	115	24.9
SB1-8	0.55	0.75	4.0-3.5	2.6-2.9	1.5-1.7	369	564	141	115	25.8
SB1-9	0.55	0.75	4.0-3.5	2.6-2.9	1.5-1.7	387	582	141	115	26.1
SB1-10	0.55	0.75	4.0-3.5	2.6-2.9	1.5-1.7	405	600	141	115	26.5
SB1-11	0.55	0.75	4.0-3.5	2.6-2.9	1.5-1.7	423	618	141	115	26.9
SB1-12	0.75	1.0	5.1-4.1	3.4-3.4	2.0-2.0	447	682	141	115	29.4
SB1-13	0.75	1.0	5.1-4.1	3.4-3.4	2.0-2.0	465	700	141	115	29.8
SB1-15	0.75	1.0	5.1-4.1	3.4-3.4	2.0-2.0	501	736	141	115	30.5
SB1-17	1.1	1.5	8.0-6.9	4.8-5.0	2.8-2.9	537	826	177	141	37.9
SB1-19	1.1	1.5	8.0-6.9	4.8-5.0	2.8-2.9	573	862	177	141	38.7
SB1-21	1.1	1.5	8.0-6.9	4.8-5.0	2.8-2.9	609	898	177	141	39.4
SB1-23	1.1	1.5	8.0-6.9	4.8-5.0	2.8-2.9	645	934	177	141	40.2
SB1-25	1.5	2.0	9.5-8.9	6.2-6.6	3.6-3.8	697	992	177	141	45.0
SB1-27	1.5	2.0	9.5-8.9	6.2-6.6	3.6-3.8	733	1028	177	141	45.8
SB1-30	1.5	2.0	9.5-8.9	6.2-6.6	3.6-3.8	787	1082	177	141	46.9
SB1-33	2.2	3.0	13.4-12.7	8.8-9.4	5.1-5.4	841	1136	177	141	49.9
SB1-36	2.2	3.0	13.4-12.7	8.8-9.4	5.1-5.4	895	1190	177	141	51.0

SB 1

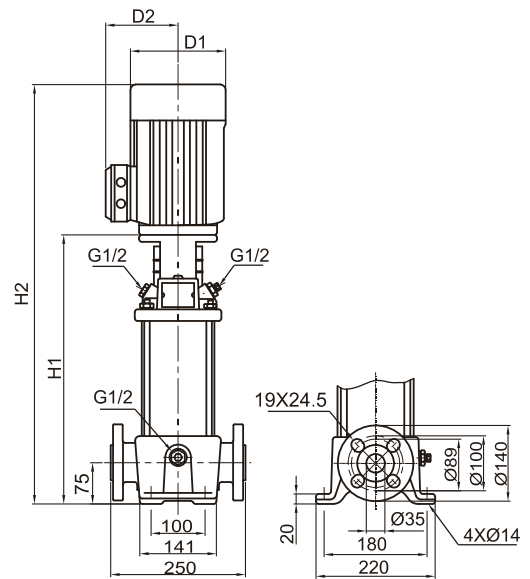


Flange(DIN) PN25 / DN25/32
 Flange(ANSI) Class300 / 1" / 11/4"
 Flange(JIS) 20K / 25A/32A

SBI ,SBN 1

50Hz	Motor		Nominal current [A]			Dimension[mm]						Net weight [kg]	
	P ₂		1ø	3ø		Vactaulic		DIN flange		D1	D2	Vactaulic	DIN flange
	[kW]	[HP]	220-240V	△220-240V	Y380-415V	H1	H2	H1	H2				
SBI(N)1-2	0.37	0.5	2.5-2.5	1.7-1.9	1.0-1.1	257	452	282	477	141	115	19.3	20.2
SBI(N)1-3	0.37	0.5	2.5-2.5	1.7-1.9	1.0-1.1	257	452	282	477	141	115	19.3	20.3
SBI(N)1-4	0.37	0.5	2.5-2.5	1.7-1.9	1.0-1.1	275	470	300	495	141	115	19.7	20.6
SBI(N)1-5	0.37	0.5	2.5-2.5	1.7-1.9	1.0-1.1	293	488	318	513	141	115	20.1	21.0
SBI(N)1-6	0.37	0.5	2.5-2.5	1.7-1.9	1.0-1.1	311	506	336	531	141	115	20.4	21.4
SBI(N)1-7	0.37	0.5	2.5-2.5	1.7-1.9	1.0-1.1	329	524	354	549	141	115	20.8	21.7
SBI(N)1-8	0.55	0.75	4.0-3.5	2.6-2.9	1.5-1.7	347	542	372	567	141	115	21.7	22.6
SBI(N)1-9	0.55	0.75	4.0-3.5	2.6-2.9	1.5-1.7	365	560	390	585	141	115	22.0	23.0
SBI(N)1-10	0.55	0.75	4.0-3.5	2.6-2.9	1.5-1.7	383	578	408	603	141	115	22.4	23.3
SBI(N)1-11	0.55	0.75	4.0-3.5	2.6-2.9	1.5-1.7	401	596	426	621	141	115	22.8	23.7
SBI(N)1-12	0.75	1.0	5.1-4.1	3.4-3.4	2.0-2.0	425	660	450	685	141	115	25.2	26.1
SBI(N)1-13	0.75	1.0	5.1-4.1	3.4-3.4	2.0-2.0	443	678	468	703	141	115	25.6	26.5
SBI(N)1-15	0.75	1.0	5.1-4.1	3.4-3.4	2.0-2.0	479	714	504	739	141	115	26.3	27.2
SBI(N)1-17	1.1	1.5	8.0-6.9	4.8-5.0	2.8-2.9	515	804	540	829	177	141	33.7	34.7
SBI(N)1-19	1.1	1.5	8.0-6.9	4.8-5.0	2.8-2.9	551	840	576	865	177	141	34.4	35.4
SBI(N)1-21	1.1	1.5	8.0-6.9	4.8-5.0	2.8-2.9	587	876	612	901	177	141	35.2	36.2
SBI(N)1-23	1.1	1.5	8.0-6.9	4.8-5.0	2.8-2.9	623	912	648	937	177	141	35.9	36.9
SBI(N)1-25	1.5	2.0	9.5-8.9	6.2-6.6	3.6-3.8	675	970	700	995	177	141	40.8	41.8
SBI(N)1-27	1.5	2.0	9.5-8.9	6.2-6.6	3.6-3.8	711	1006	736	1031	177	141	41.6	42.5
SBI(N)1-30	1.5	2.0	9.5-8.9	6.2-6.6	3.6-3.8	765	1060	790	1085	177	141	42.7	43.6
SBI(N)1-33	2.2	3.0	13.4-12.7	8.8-9.4	5.1-5.4	819	1114	844	1139	177	141	45.6	46.6
SBI(N)1-36	2.2	3.0	13.4-12.7	8.8-9.4	5.1-5.4	873	1168	898	1193	177	141	46.7	47.7

SBI / SBN 1

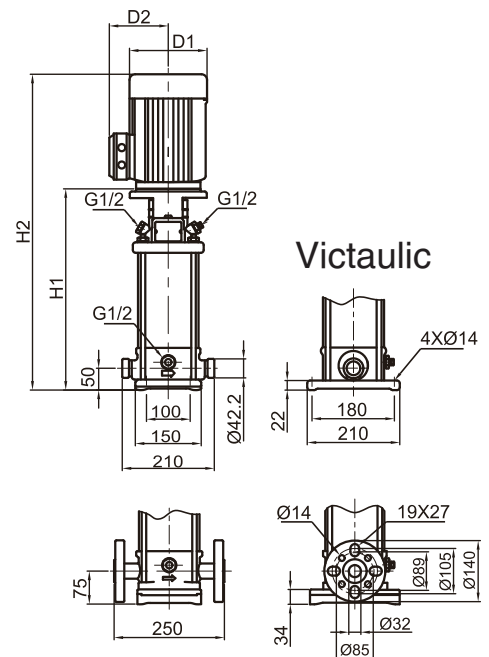

Flange(DIN) PN25 / DN25/32
 Flange(ANSI) Class300 / 1" / 11/4"
 Flange(JIS) 20K / 25A/32A

Performance Curves





Vertical Multistage Centrifugal In-line Pumps

SB(I/N) 3



STAIRS PUMPS

SB, SBI, SBN 3

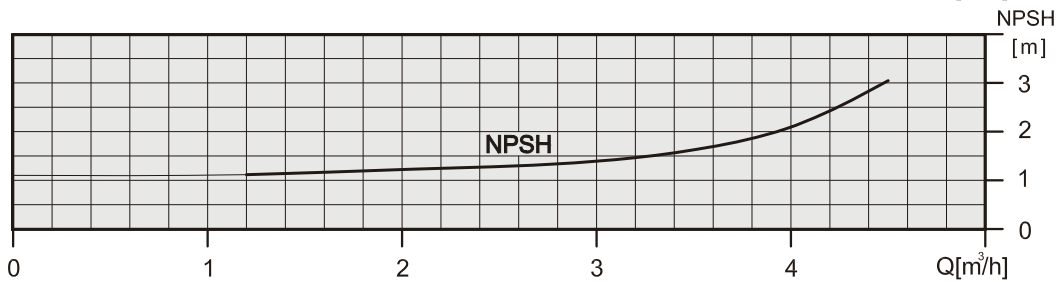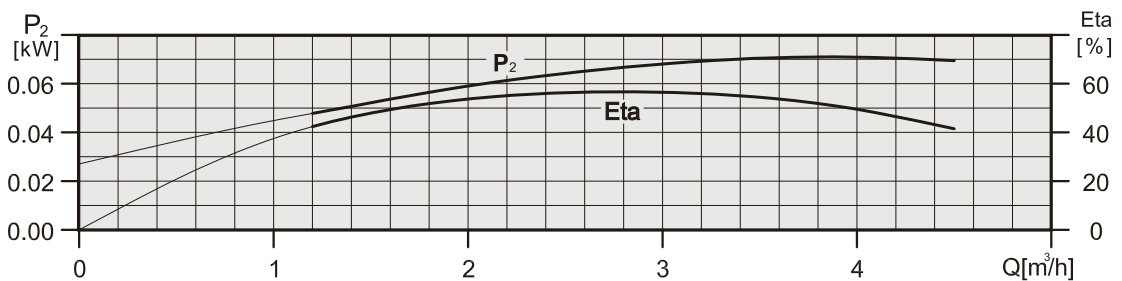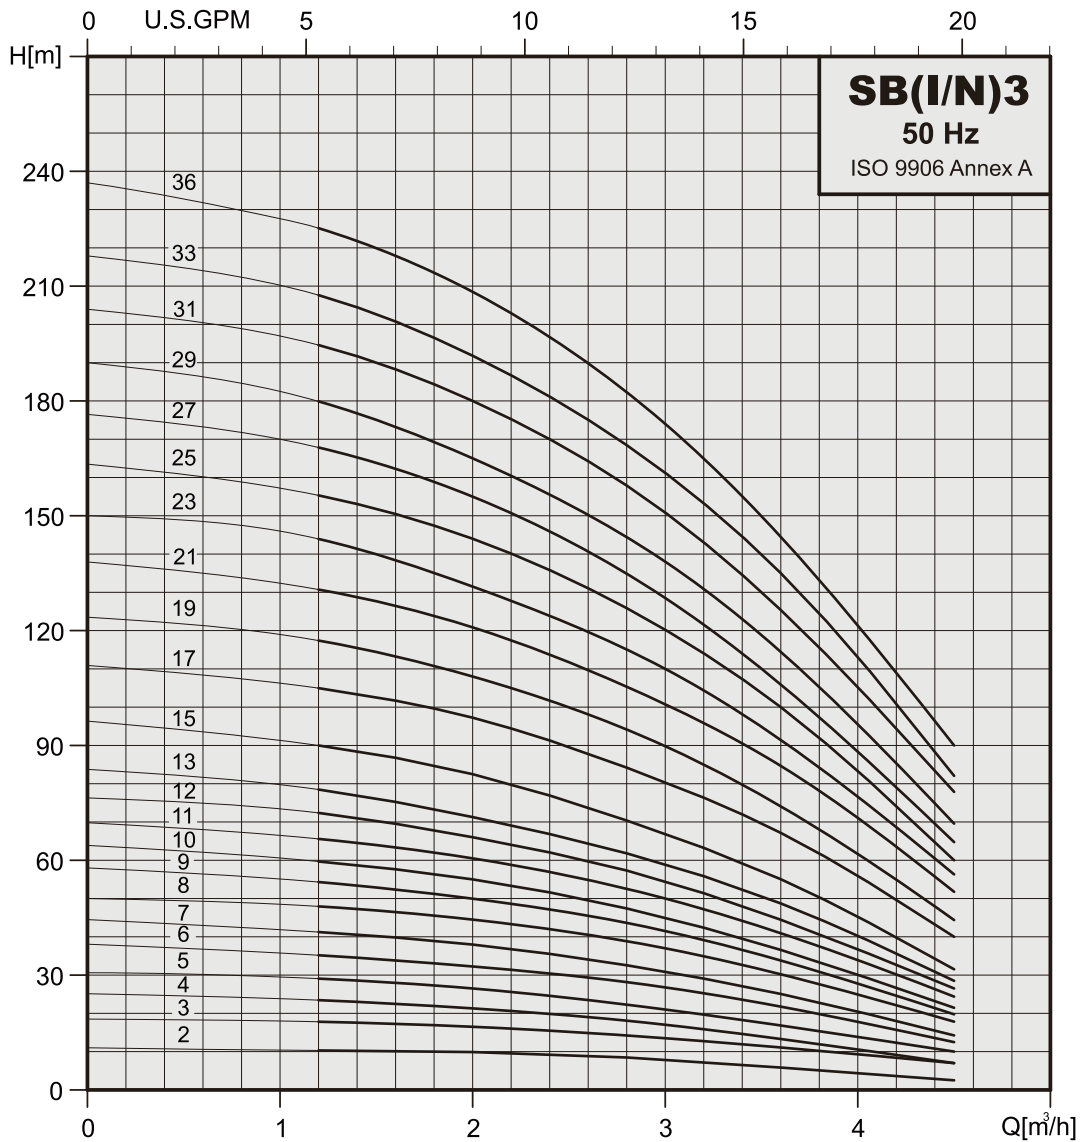

Technical data


Vertical Multistage Centrifugal In-line Pumps

SB(I/N) 3




STAIRS PUMPS

SB 3

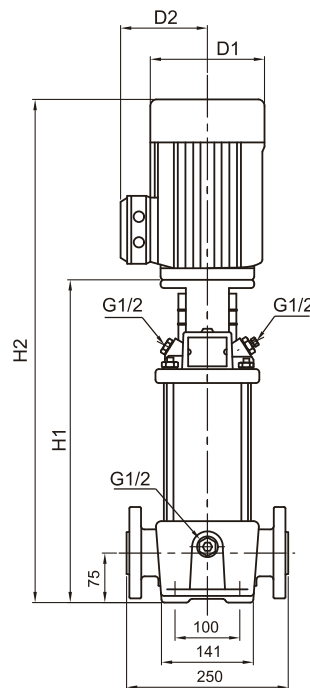

Flange(DIN) PN25 / DN25/32
 Flange(ANSI) Class300 / 1" / 11/4"
 Flange(JIS) 20K / 25A/32A



SB 3

50Hz	Motor		Nominal current [A]				Dimension[mm]				Net weight [kg]	
	P ₂		1Ø	3Ø		3Ø		DIN flange		DIN flange		
Pump type	[kW]	[HP]	220-240V	△220-240V	Y380-415V	△380-415V	Y660-720V	H1	H2	D1	D2	
SB 3-2	0.37	0.5	2.5-2.5	1.7-1.9	1.0-1.1	-----	-----	279	474	141	115	23.4
SB 3-3	0.37	0.5	2.5-2.5	1.7-1.9	1.0-1.1	-----	-----	279	474	141	115	23.4
SB 3-4	0.37	0.5	2.5-2.5	1.7-1.9	1.0-1.1	-----	-----	297	492	141	115	23.8
SB 3-5	0.37	0.5	2.5-2.5	1.7-1.9	1.0-1.1	-----	-----	315	510	141	115	24.2
SB 3-6	0.55	0.75	4.0-3.5	2.6-2.9	1.5-1.7	-----	-----	333	528	141	115	25.0
SB 3-7	0.55	0.75	4.0-3.5	2.6-2.9	1.5-1.7	-----	-----	351	546	141	115	25.4
SB 3-8	0.75	1.0	5.1-4.1	3.4-3.4	2.0-2.0	-----	-----	375	610	141	115	27.9
SB 3-9	0.75	1.0	5.1-4.1	3.4-3.4	2.0-2.0	-----	-----	393	628	141	115	28.3
SB 3-10	0.75	1.0	5.1-4.1	3.4-3.4	2.0-2.0	-----	-----	411	646	141	115	28.7
SB 3-11	1.1	1.5	8.0-6.9	4.8-5.0	2.8-2.9	-----	-----	429	718	177	141	35.8
SB 3-12	1.1	1.5	8.0-6.9	4.8-5.0	2.8-2.9	-----	-----	447	736	177	141	36.1
SB 3-13	1.1	1.5	8.0-6.9	4.8-5.0	2.8-2.9	-----	-----	465	754	177	141	36.5
SB-3-15	1.1	1.5	8.0-6.9	4.8-5.0	2.8-2.9	-----	-----	501	790	177	141	37.2
SB-3-17	1.5	2.0	9.5-8.9	6.2-6.6	3.6-3.8	-----	-----	553	848	177	141	42.0
SB-3-19	1.5	2.0	9.5-8.9	6.2-6.6	3.6-3.8	-----	-----	589	884	177	141	42.8
SB-3-21	2.2	3.0	13.4-12.7	8.8-9.4	5.1-5.4	-----	-----	625	920	177	141	45.3
SB-3-23	2.2	3.0	13.4-12.7	8.8-9.4	5.1-5.4	-----	-----	661	956	177	141	46.1
SB-3-25	2.2	3.0	13.4-12.7	8.8-9.4	5.1-5.4	-----	-----	697	992	177	141	46.8
SB-3-27	2.2	3.0	13.4-12.7	8.8-9.4	5.1-5.4	-----	-----	733	1028	177	141	47.6
SB-3-29	2.2	3.0	13.4-12.7	8.8-9.4	5.1-5.4	-----	-----	769	1064	177	141	48.3
SB-3-31	3.0	4.0	-----	11.8-12.3	6.8-7.1	6.8-6.9	3.9-4.0	809	1125	197	147	58.0
SB-3-33	3.0	4.0	-----	11.8-12.3	6.8-7.1	6.8-6.9	3.9-4.0	845	1161	197	147	58.8
SB-3-36	3.0	4.0	-----	11.8-12.3	6.8-7.1	6.8-6.9	3.9-4.0	899	1215	197	147	59.9

Performance Curves





Vertical Multistage Centrifugal In-line Pumps

SB(I/N) 3



STAIRS PUMPS

SB, SBI, SBN 3

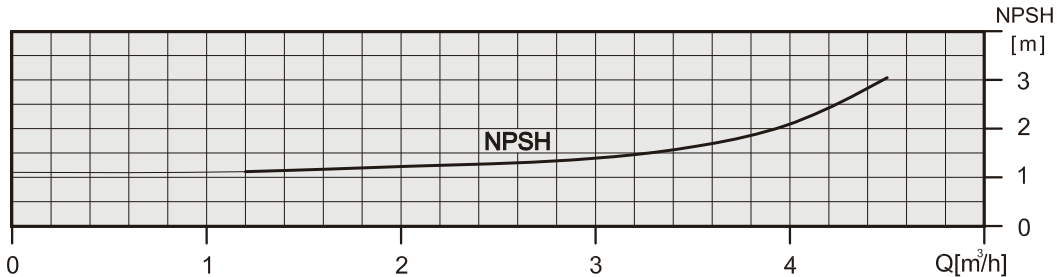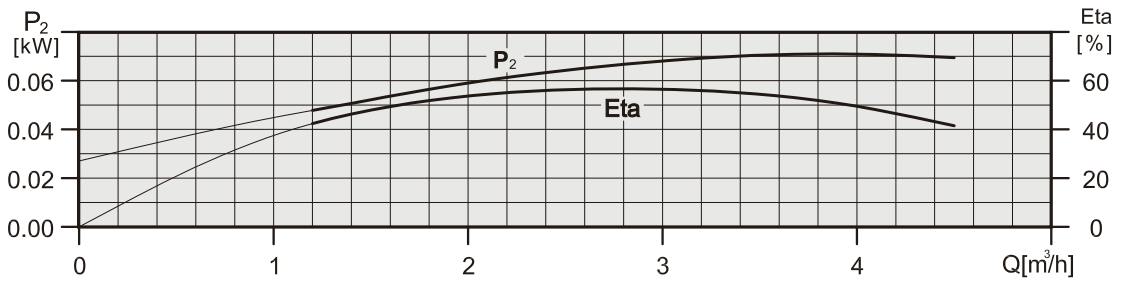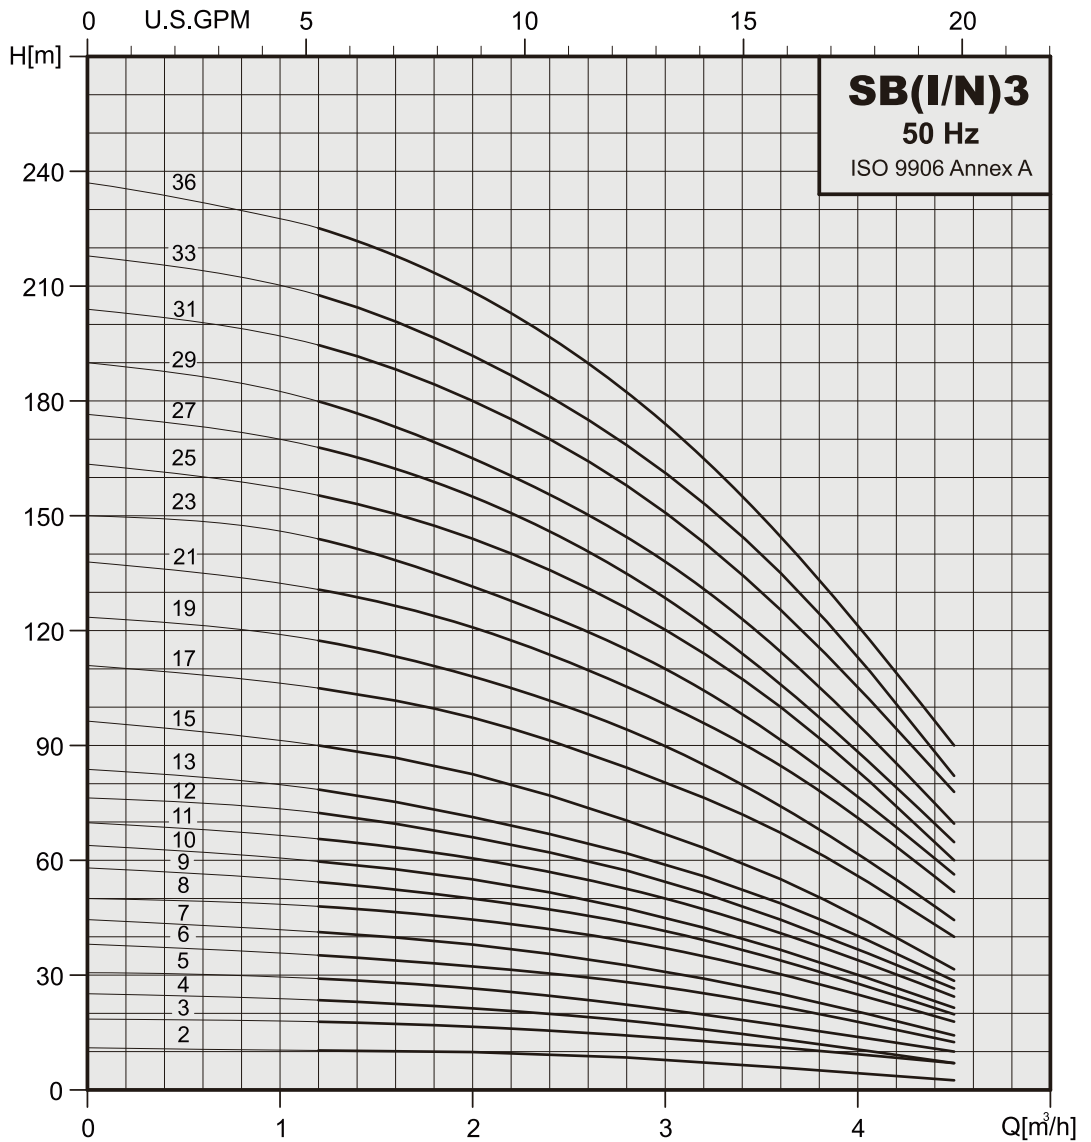

Technical data




Vertical Multistage Centrifugal In-line Pumps

SB(I/N) 3



STAIRS PUMPS

SBI / SBN 3

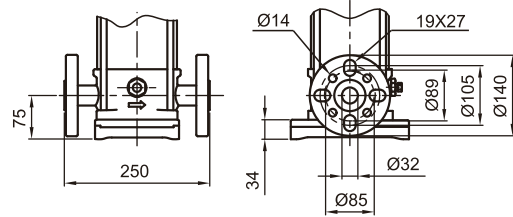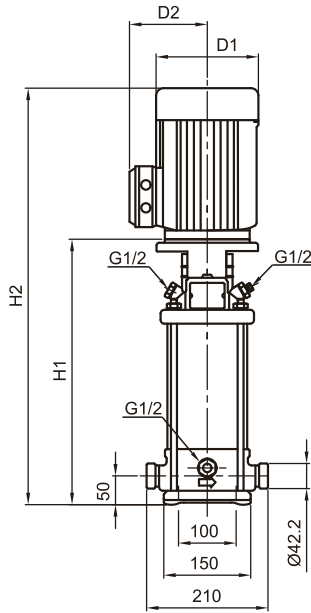

Flange(DIN) PN25 / DN25/32
 Flange(ANSI) Class300 / 1" / 1 1/4"
 Flange(JIS) 20K / 25A/32A

SBI ,SBN 3

50Hz	Motor		Nominal current [A]					Dimension[mm]						Net weight [kg]	
	P ₂	1ø	1ø	3ø	3ø	3ø	Vactaulic		DIN flange		D1	D2	Vactaulic	DIN flange	
Pump type	[kW]	[HP]	220-240V	△220-240V	Y380-415V	△380-415V	Y660-720V	H1	H2	H1	H2	D1	D2		
SBI(N)3-2	0.37	0.5	2.5 - 2.5	1.7 - 1.9	1.0 - 1.1	-----	-----	257	452	282	477	141	115	19.3	20.2
SBI(N)3-3	0.37	0.5	2.5 - 2.5	1.7 - 1.9	1.0 - 1.1	-----	-----	257	452	282	477	141	115	19.3	20.3
SBI(N)3-4	0.37	0.5	2.5 - 2.5	1.7 - 1.9	1.0 - 1.1	-----	-----	275	470	300	495	141	115	19.7	20.6
SBI(N)3-5	0.37	0.5	2.5 - 2.5	1.7 - 1.9	1.0 - 1.1	-----	-----	293	488	318	513	141	115	20.1	21.0
SBI(N)3-6	0.55	0.75	4.0 - 3.5	2.6 - 2.9	1.5 - 1.7	-----	-----	311	506	336	531	141	115	20.9	21.9
SBI(N)3-7	0.55	0.75	4.0 - 3.5	2.6 - 2.9	1.5 - 1.7	-----	-----	329	524	354	549	141	115	21.3	22.2
SBI(N)3-8	0.75	1.0	5.1 - 4.1	3.4 - 3.4	2.0 - 2.0	-----	-----	353	588	378	613	141	115	23.7	24.6
SBI(N)3-9	0.75	1.0	5.1 - 4.1	3.4 - 3.4	2.0 - 2.0	-----	-----	371	606	396	631	141	115	24.0	25.0
SBI(N)3-10	0.75	1.0	5.1 - 4.1	3.4 - 3.4	2.0 - 2.0	-----	-----	389	624	414	649	141	115	24.4	25.4
SBI(N)3-11	1.1	1.5	8.0 - 6.9	4.8 - 5.0	2.8 - 2.9	-----	-----	407	696	432	721	177	141	31.5	32.5
SBI(N)3-12	1.1	1.5	8.0 - 6.9	4.8 - 5.0	2.8 - 2.9	-----	-----	425	714	450	739	177	141	31.9	32.8
SBI(N)3-13	1.1	1.5	8.0 - 6.9	4.8 - 5.0	2.8 - 2.9	-----	-----	443	732	468	757	177	141	32.3	33.2
SBI(N)3-15	1.1	1.5	8.0 - 6.9	4.8 - 5.0	2.8 - 2.9	-----	-----	479	768	504	793	177	141	33.0	33.9
SBI(N)3-17	1.5	2.0	9.5 - 8.9	6.2 - 6.6	3.6 - 3.8	-----	-----	531	826	556	851	177	141	37.9	38.8
SBI(N)3-19	1.5	2.0	9.5 - 8.9	6.2 - 6.6	3.6 - 3.8	-----	-----	567	862	592	887	177	141	38.6	39.5
SBI(N)3-21	2.2	3.0	13.4 - 12.7	8.8 - 9.4	5.1 - 5.4	6.8 - 6.9	3.9 - 4.0	603	898	628	923	177	141	41.2	42.1
SBI(N)3-23	2.2	3.0	13.4 - 12.7	8.8 - 9.4	5.1 - 5.4	6.8 - 6.9	3.9 - 4.0	639	934	664	959	177	141	41.9	42.9
SBI(N)3-25	2.2	3.0	13.4 - 12.7	8.8 - 9.4	5.1 - 5.4	8.7 - 8.3	5.0 - 4.8	675	970	700	995	177	141	42.6	43.6
SBI(N)3-27	2.2	3.0	13.4 - 12.7	8.8 - 9.4	5.1 - 5.4	8.7 - 8.3	5.0 - 4.8	711	1006	736	1031	177	141	43.4	44.3
SBI(N)3-29	2.2	3.0	13.4 - 12.7	8.8 - 9.4	5.1 - 5.4	8.7 - 8.3	5.0 - 4.8	747	1042	772	1067	177	141	44.1	45.1
SBI(N)3-31	3.0	4.0	-----	11.8 - 12.3	6.8 - 7.1	8.7 - 8.3	5.0 - 4.8	787	1103	812	1128	197	147	53.4	54.4
SBI(N)3-33	3.0	4.0	-----	11.8 - 12.3	6.8 - 7.1	10.9 - 10.8	6.3 - 6.2	823	1139	848	1164	197	147	54.2	55.1
SBI(N)3-36	3.0	4.0	-----	11.8 - 12.3	6.8 - 7.1	10.9 - 10.8	6.3 - 6.2	877	1193	902	1218	197	147	55.3	56.2

Performance Curves




Vertical Multistage Centrifugal In-line Pumps

SB(I/N) 5



STAIRS PUMPS

SB, SBI, SBN 5

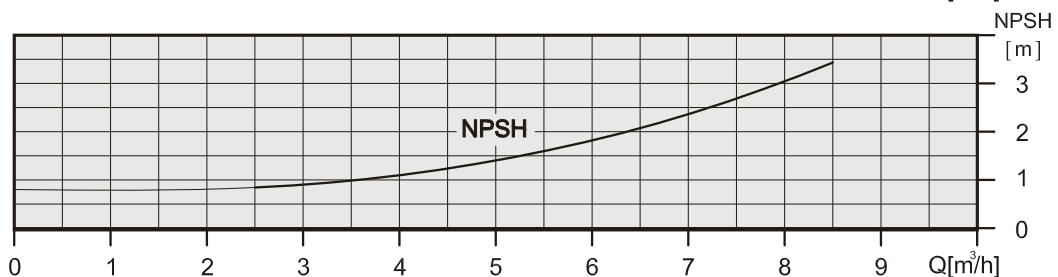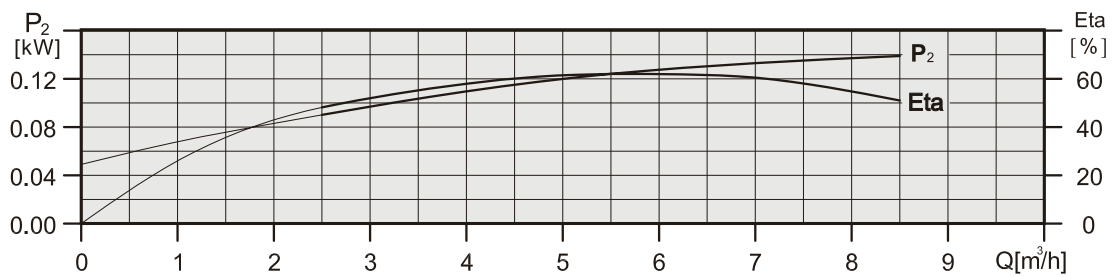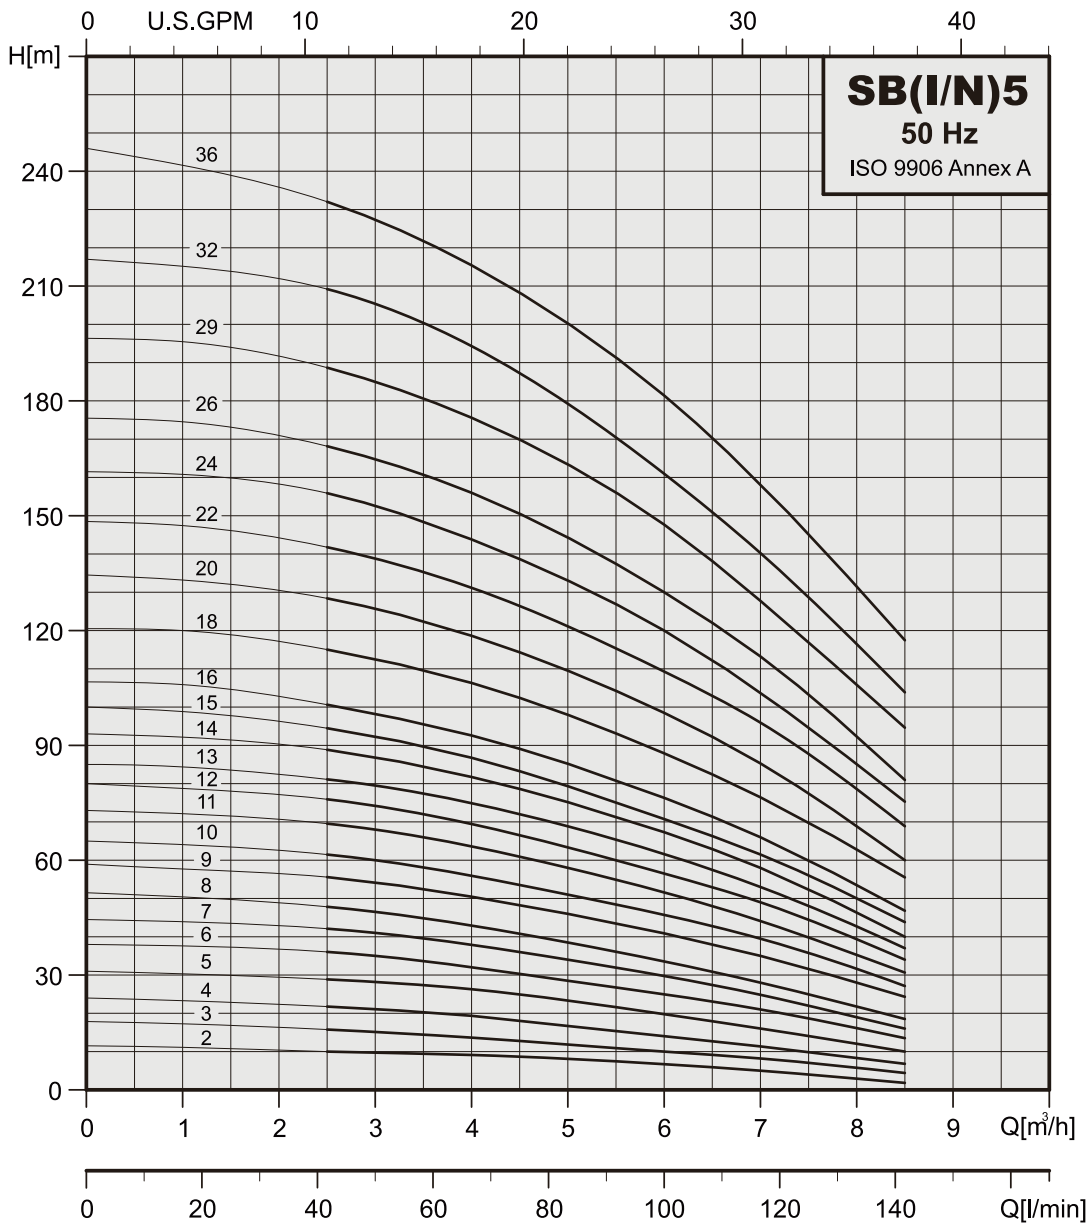

Technical data


Vertical Multistage Centrifugal In-line Pumps

SB(I/N) 5



STAIRS PUMPS

SB 5

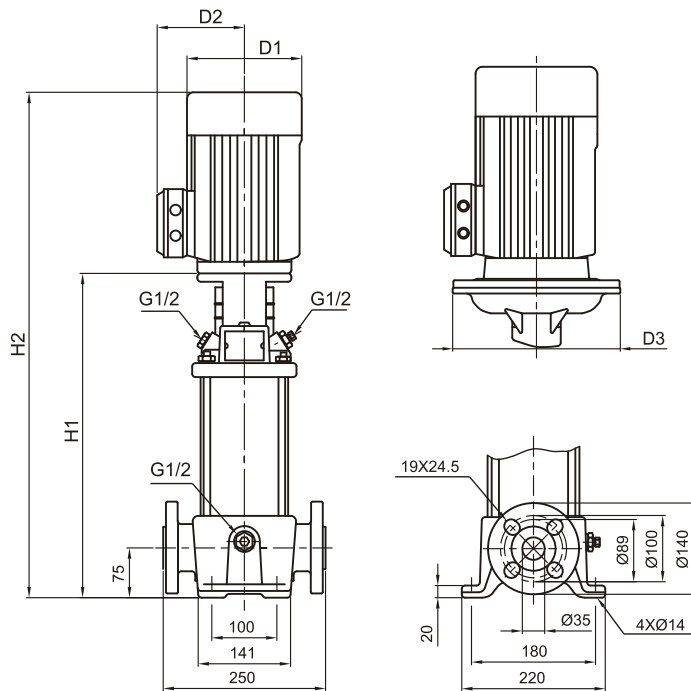

Flange(DIN) PN25 / DN25/32
 Flange(ANSI) Class300 / 1" / 1 1/4"
 Flange(JIS) 20K / 25A/32A

SB 5

50Hz Pump type	Motor P ₂		Nominal current [A]					Dimension[mm]					Net weight [kg]
	[kW]	[HP]	1Ø	3Ø	3Ø	3Ø	3Ø	DIN flange			DIN flange		
			220-240V	△220-240V	Y380-415V	△380-415V	Y660-720V	H1	H2	D1	D2	D3	
SB5-2	0.37	0.5	2.5 - 2.5	1.7 - 1.9	1.0 - 1.1	-----	-----	279	474	141	115	—	23.3
SB5-3	0.55	0.75	4.0 - 3.5	2.6 - 2.9	1.5 - 1.7	-----	-----	306	501	141	115	—	24.2
SB5-4	0.55	0.75	4.0 - 3.5	2.6 - 2.9	1.5 - 1.7	-----	-----	333	528	141	115	—	24.8
SB5-5	0.75	1.0	5.1 - 4.1	3.4 - 3.4	2.0 - 2.0	-----	-----	366	601	141	115	—	27.4
SB5-6	1.1	1.5	8.0 - 6.9	4.8 - 5.0	2.8 - 2.9	-----	-----	393	682	177	141	—	34.7
SB5-7	1.1	1.5	8.0 - 6.9	4.8 - 5.0	2.8 - 2.9	-----	-----	420	709	177	141	—	35.2
SB5-8	1.1	1.5	8.0 - 6.9	4.8 - 5.0	2.8 - 2.9	-----	-----	447	736	177	141	—	35.7
SB5-9	1.5	2.0	9.5 - 8.9	6.2 - 6.6	3.6 - 3.8	-----	-----	490	785	177	141	—	40.3
SB5-10	1.5	2.0	9.5 - 8.9	6.2 - 6.6	3.6 - 3.8	-----	-----	517	812	177	141	—	40.9
SB5-11	2.2	3.0	13.4 - 12.7	8.8 - 9.4	5.1 - 5.4	-----	-----	544	839	177	141	—	43.2
SB5-12	2.2	3.0	13.4 - 12.7	8.8 - 9.4	5.1 - 5.4	-----	-----	571	866	177	141	—	43.7
SB5-13	2.2	3.0	13.4 - 12.7	8.8 - 9.4	5.1 - 5.4	-----	-----	598	893	177	141	—	44.2
SB5-14	2.2	3.0	13.4 - 12.7	8.8 - 9.4	5.1 - 5.4	-----	-----	625	920	177	141	—	44.8
SB5-15	2.2	3.0	13.4 - 12.7	8.8 - 9.4	5.1 - 5.4	-----	-----	652	947	177	141	—	45.2
SB5-16	2.2	3.0	13.4 - 12.7	8.8 - 9.4	5.1 - 5.4	-----	-----	679	974	177	141	—	45.8
SB5-18	3.0	4.0	-----	11.8 - 12.3	6.8 - 7.1	6.8 - 6.9	3.9 - 4.0	737	1053	197	147	—	55.7
SB5-20	3.0	4.0	-----	11.8 - 12.3	6.8 - 7.1	6.8 - 6.9	3.9 - 4.0	791	1107	197	147	—	56.9
SB5-22	4.0	5.5	-----	15.1 - 15.2	8.7 - 8.8	8.7 - 8.3	5.0 - 4.8	845	1171	220	161	—	61.8
SB5-24	4.0	5.5	-----	15.1 - 15.2	8.7 - 8.8	8.7 - 8.3	5.0 - 4.8	899	1225	220	161	—	62.8
SB5-26	4.0	5.5	-----	15.1 - 15.2	8.7 - 8.8	8.7 - 8.3	5.0 - 4.8	953	1279	220	161	—	64.7
SB5-29	4.0	5.5	-----	15.1 - 15.2	8.7 - 8.8	8.7 - 8.3	5.0 - 4.8	1034	1360	220	161	—	66.6
SB5-32	5.5	7.5	-----	18.7 - 18.0	10.8 - 10.4	10.9 - 10.8	6.3 - 6.2	1145	1507	235	197	300	89.4
SB5-36	5.5	7.5	-----	18.7 - 18.0	10.8 - 10.4	10.9 - 10.8	6.3 - 6.2	1253	1615	235	197	300	91.9

Performance Curves




Vertical Multistage Centrifugal In-line Pumps

SB(I/N) 5



STAIRS PUMPS

SB, SBI, SBN 5

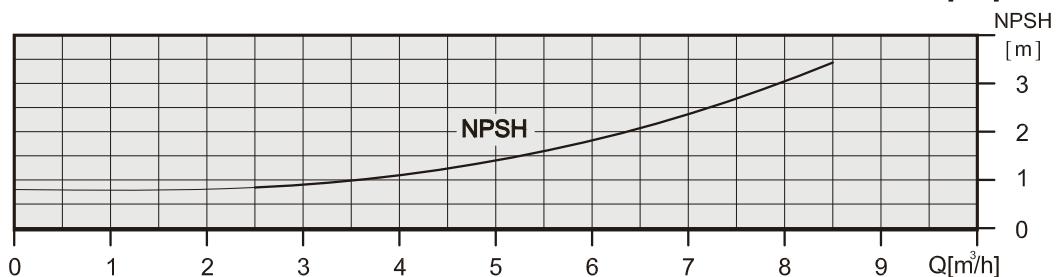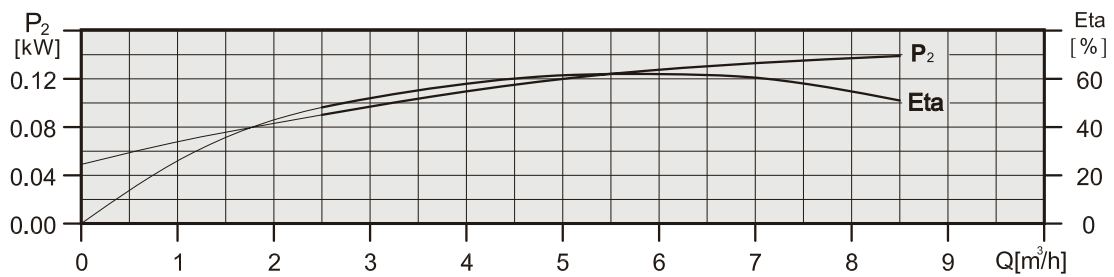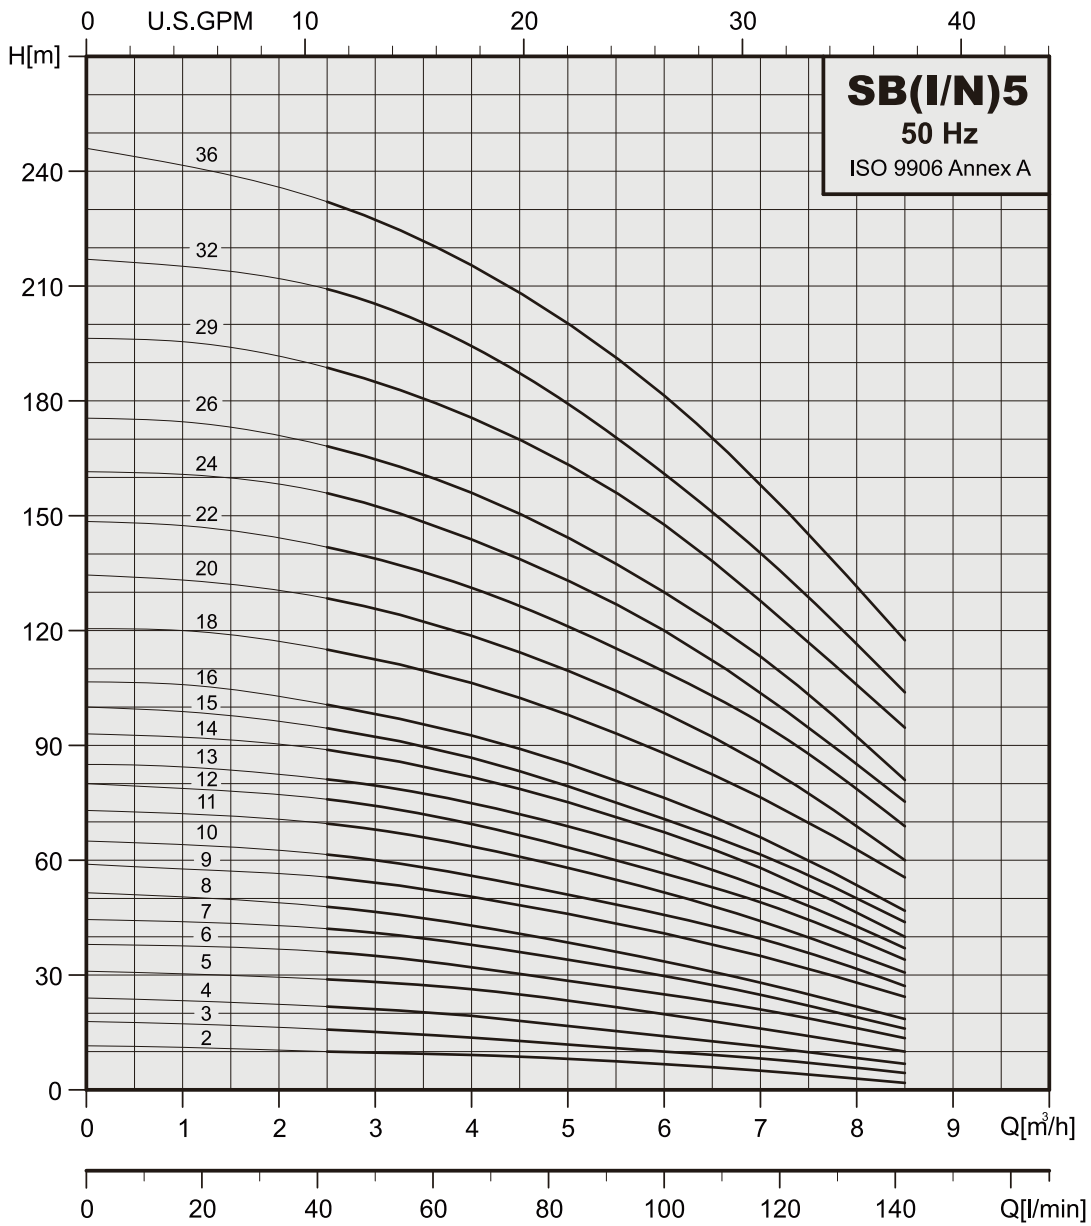

Technical data


Vertical Multistage Centrifugal In-line Pumps

SB(I/N) 5




STAIRS PUMPS

SBI / SBN 5

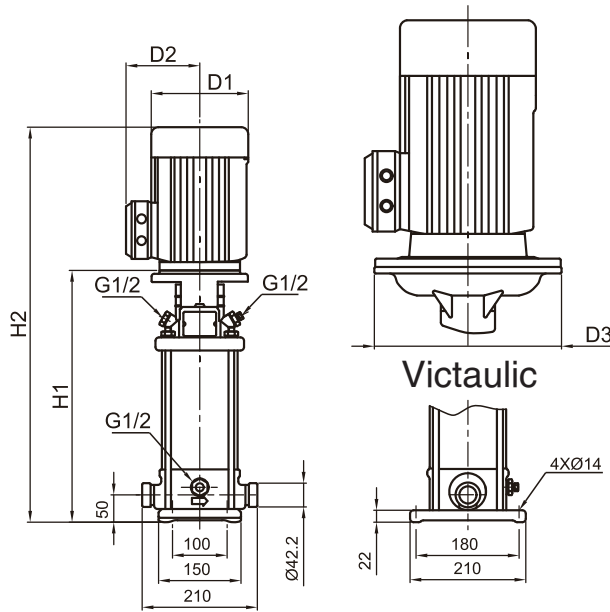

Flange(DIN) PN25 / DN25/32
 Flange(ANSI) Class300 / 1" / 1 1/4"
 Flange(JIS) 20K / 25A/32A

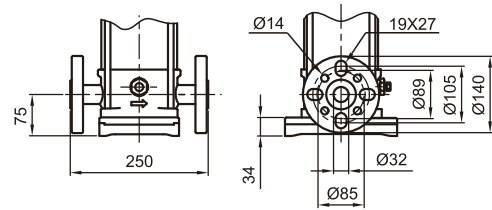

SBI ,SBN 5

50Hz	Motor		Nominal current [A]					Dimension[mm]						Net weight [kg]		
	P ₂		1Ø	3Ø	3Ø	3Ø	Vactaulic	DIN flange			D1	D2	D3	Vactaulic	DIN flange	
Pump type	[kW]	[HP]	220-240V	△220-240V	Y380-415V	△380-415V	Y660-720V	H1	H2	H1	H2					
SB(I/N)5-2	0.37	0.5	2.5 - 2.5	1.7 - 1.9	1.0 - 1.1	-----	-----	257	452	282	477	141	115	—	19.2	20.1
SB(I/N)5-3	0.55	0.75	4.0 - 3.5	2.6 - 2.9	1.5 - 1.7	-----	-----	284	479	309	504	141	115	—	20.3	21.2
SB(I/N)5-4	0.55	0.75	4.0 - 3.5	2.6 - 2.9	1.5 - 1.7	-----	-----	311	506	336	531	141	115	—	20.8	21.8
SB(I/N)5-5	0.75	1.0	5.1 - 4.1	3.4 - 3.4	2.0 - 2.0	-----	-----	344	579	369	604	141	115	—	23.4	24.3
SB(I/N)5-6	1.1	1.5	8.0 - 6.9	4.8 - 5.0	2.8 - 2.9	-----	-----	371	660	396	685	177	141	—	30.7	31.6
SB(I/N)5-7	1.1	1.5	8.0 - 6.9	4.8 - 5.0	2.8 - 2.9	-----	-----	398	687	423	712	177	141	—	31.2	32.1
SB(I/N)5-8	1.1	1.5	8.0 - 6.9	4.8 - 5.0	2.8 - 2.9	-----	-----	425	714	450	739	177	141	—	31.7	32.7
SB(I/N)5-9	1.5	2.0	9.5 - 8.9	6.2 - 6.6	3.6 - 3.8	-----	-----	468	763	493	788	177	141	—	36.4	37.4
SB(I/N)5-10	1.5	2.0	9.5 - 8.9	6.2 - 6.6	3.6 - 3.8	-----	-----	495	790	520	815	177	141	—	37.0	37.9
SB(I/N)5-11	2.2	3.0	13.4-12.7	8.8 - 9.4	5.1 - 5.4	-----	-----	522	817	547	842	177	141	—	39.3	40.3
SB(I/N)5-12	2.2	3.0	13.4-12.7	8.8 - 9.4	5.1 - 5.4	-----	-----	549	844	574	869	177	141	—	39.9	40.8
SB(I/N)5-13	2.2	3.0	13.4-12.7	8.8 - 9.4	5.1 - 5.4	-----	-----	576	871	601	896	177	141	—	40.4	41.4
SB(I/N)5-14	2.2	3.0	13.4-12.7	8.8 - 9.4	5.1 - 5.4	-----	-----	603	898	628	923	177	141	—	41.0	41.9
SB(I/N)5-15	2.2	3.0	13.4-12.7	8.8 - 9.4	5.1 - 5.4	-----	-----	630	925	655	950	177	141	—	41.5	42.5
SB(I/N)5-16	2.2	3.0	13.4-12.7	8.8 - 9.4	5.1 - 5.4	-----	-----	657	952	682	977	177	141	—	42.1	43.0
SB(I/N)5-18	3.0	4.0	-----	11.8 - 12.3	6.8 - 7.1	6.8 - 6.9	3.9 - 4.0	715	1031	740	1056	197	147	—	51.7	52.7
SB(I/N)5-20	3.0	4.0	-----	11.8 - 12.3	6.8 - 7.1	6.8 - 6.9	3.9 - 4.0	769	1085	794	1110	197	147	—	53.0	53.9
SB(I/N)5-22	4.0	5.5	-----	15.1 - 15.2	8.7 - 8.8	8.7 - 8.3	5.0 - 4.8	823	1149	848	1174	220	161	—	57.8	58.8
SB(I/N)5-24	4.0	5.5	-----	15.1 - 15.2	8.7 - 8.8	8.7 - 8.3	5.0 - 4.8	877	1203	902	1228	220	161	—	58.9	59.8
SB(I/N)5-26	4.0	5.5	-----	15.1 - 15.2	8.7 - 8.8	8.7 - 8.3	5.0 - 4.8	931	1257	956	1282	220	161	—	60.0	61.9
SB(I/N)5-29	4.0	5.5	-----	15.1 - 15.2	8.7 - 8.8	8.7 - 8.3	5.0 - 4.8	1012	1338	1037	1363	220	161	—	61.7	62.6
SB(I/N)5-32	5.5	7.5	-----	18.7 - 18.0	10.8 - 10.4	10.9 - 10.8	6.3 - 6.2	1123	1485	1148	1510	235	197	300	84.2	85.1
SB(I/N)5-36	5.5	7.5	-----	18.7 - 18.0	10.8 - 10.4	10.9 - 10.8	6.3 - 6.2	1231	1593	1256	1618	235	197	300	86.4	87.4

Performance Curves




Vertical Multistage Centrifugal In-line Pumps

SB(I/N) 10




STAIRS PUMPS

SB, SBI, SBN 10

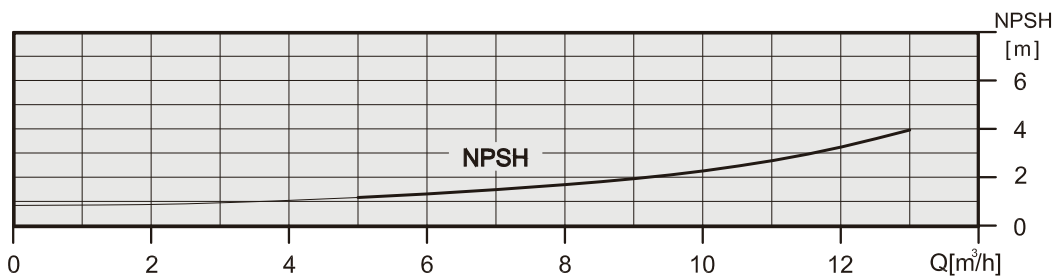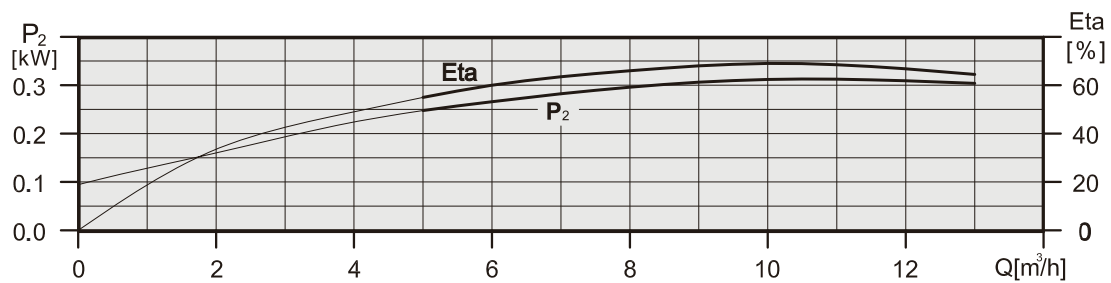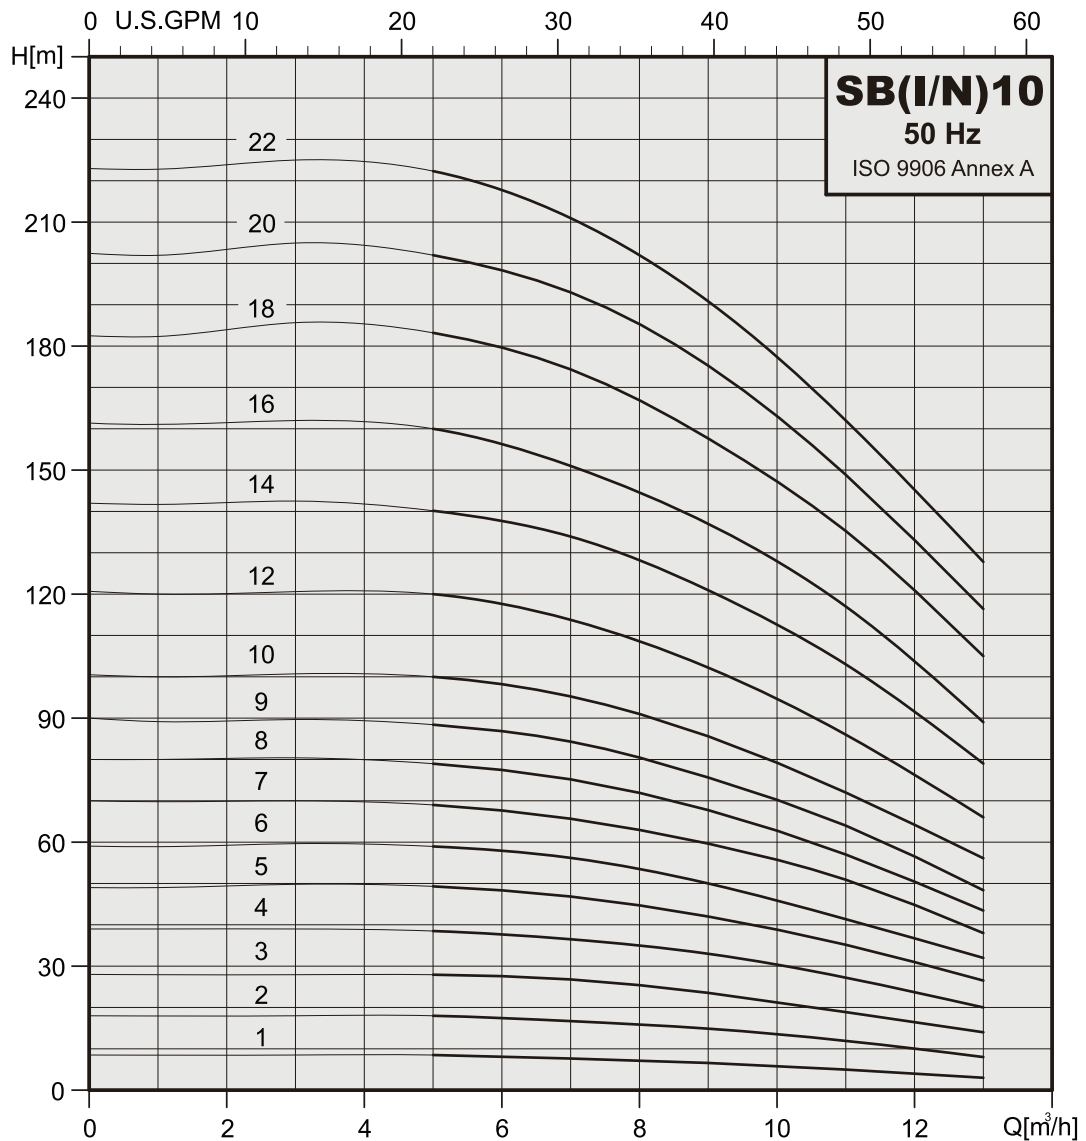



SB 10

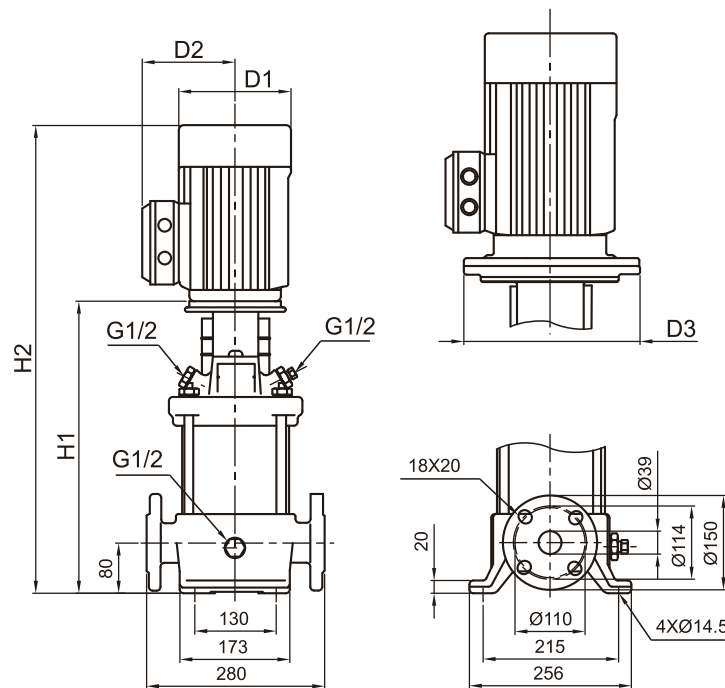

Flange(DIN) PN16-25 / DN40




Flange(JIS) 10K-20K / 40A

SB 10

50Hz	Motor		Nominal current [A]					Dimension[mm]					Net weight [kg]
	P ₂		1Ø	3Ø		3Ø	DIN flange			DIN flange			
Pump type	[kW]	[HP]	220-240V	△220-240V	Y380-415V	△380-415V	Y660-720V	H1	H2		D1	D2	D3
SB10-1	0.37	0.5	2.5 - 2.5	1.7 - 1.9	1.0 - 1.1	-----	-----	343	538	141	115	—	35.9
SB10-2	0.75	1.0	5.1 - 4.1	3.4 - 3.4	2.0 - 2.0	-----	-----	347	582	141	115	—	38.2
SB10-3	1.1	1.5	8.0 - 6.9	4.8 - 5.0	2.8 - 2.9	-----	-----	377	666	177	141	—	45.9
SB10-4	1.5	2.0	9.5 - 8.9	6.2 - 6.6	3.6 - 3.8	-----	-----	423	718	177	141	—	51.1
SB10-5	2.2	3.0	13.4 - 12.7	8.8 - 9.4	5.1 - 5.4	-----	-----	453	748	177	141	—	53.9
SB10-6	2.2	3.0	13.4 - 12.7	8.8 - 9.4	5.1 - 5.4	-----	-----	483	778	177	141	—	55.0
SB10-7	3.0	4.0	-----	11.8 - 12.3	6.8 - 7.1	6.8 - 6.9	3.9 - 4.0	518	834	197	147	—	65.2
SB10-8	3.0	4.0	-----	11.8 - 12.3	6.8 - 7.1	6.8 - 6.9	3.9 - 4.0	548	864	197	147	—	66.1
SB10-9	3.0	4.0	-----	11.8 - 12.3	6.8 - 7.1	6.8 - 6.9	3.9 - 4.0	578	894	197	147	—	67.3
SB10-10	4.0	5.5	-----	15.1 - 15.2	8.7 - 8.8	8.7 - 8.3	5.0 - 4.8	608	934	220	161	—	72.3
SB10-12	4.0	5.5	-----	15.1 - 15.2	8.7 - 8.8	8.7 - 8.3	5.0 - 4.8	668	994	220	161	—	74.4
SB10-14	5.5	7.5	-----	18.7 - 18.0	10.8 - 10.4	10.9 - 10.8	6.3 - 6.2	760	1122	235	197	300	103.4
SB10-16	5.5	7.5	-----	18.7 - 18.0	10.8 - 10.4	10.9 - 10.8	6.3 - 6.2	820	1182	235	197	300	105.5
SB10-18	7.5	10	-----	25.5 - 24.9	14.7 - 14.4	14.9 - 14.8	8.6 - 8.5	880	1285	235	197	300	112.5
SB10-20	7.5	10	-----	25.5 - 24.9	14.7 - 14.4	14.9 - 14.8	8.6 - 8.5	940	1345	235	197	300	115.6
SB10-22	7.5	10	-----	25.5 - 24.9	14.7 - 14.4	14.9 - 14.8	8.6 - 8.5	1000	1405	235	197	300	117.7




SB, SBI, SBN 10

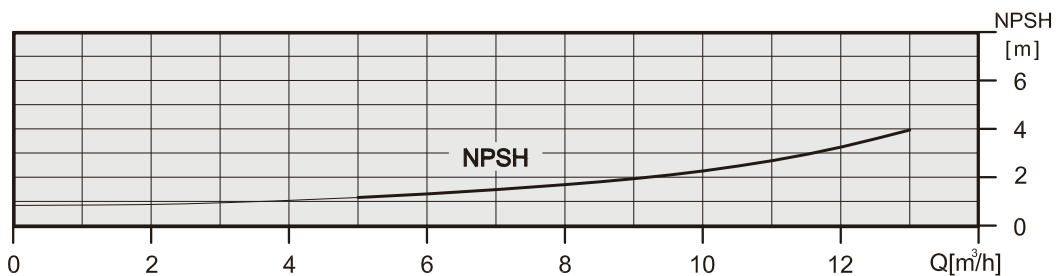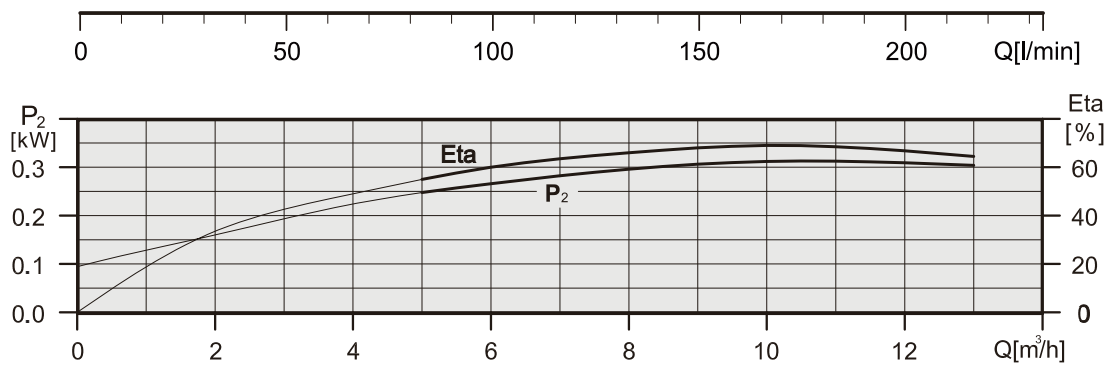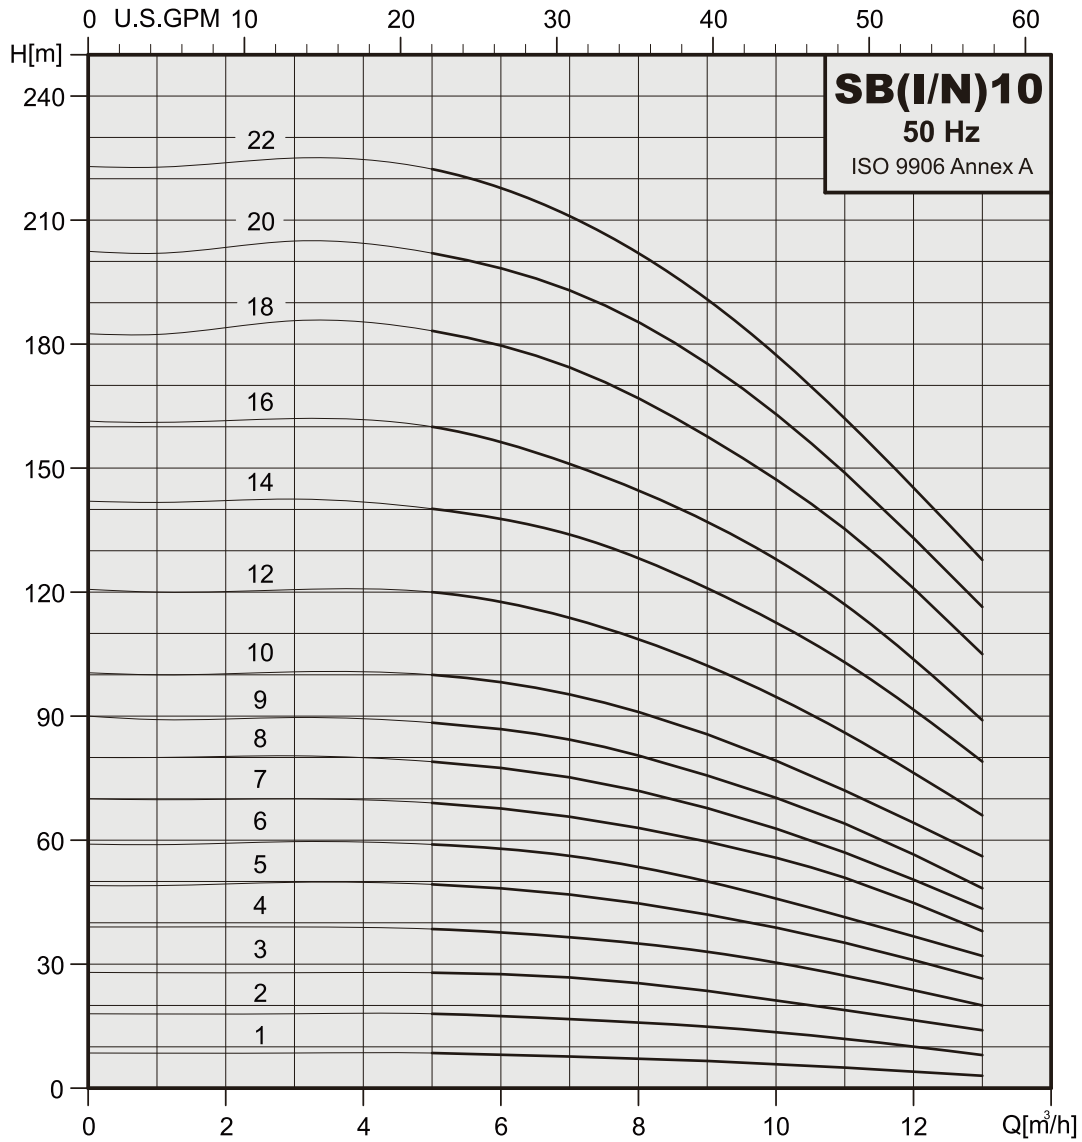



SBI / SBN 10



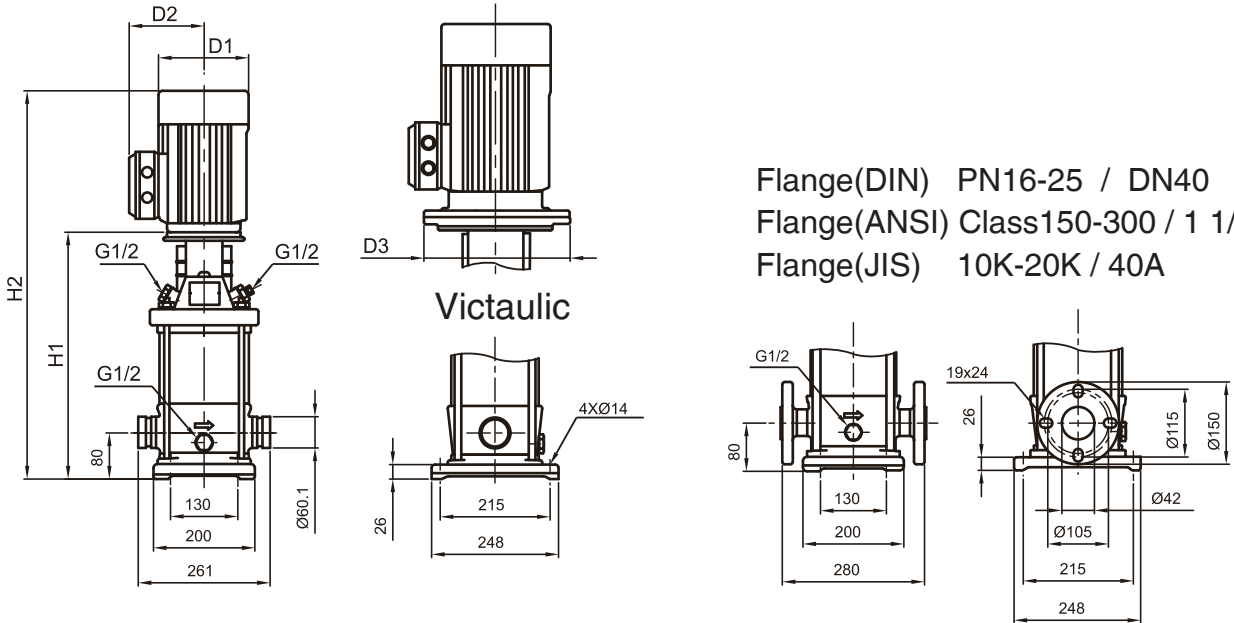


SBI ,SBN 10

50Hz	Motor		Nominal current [A]					Dimension[mm]						Net weight [kg]		
	P ₂		1Ø	3Ø	3Ø	3Ø	3Ø	Vactaulic		DIN flange		D1	D2	D3	Vactaulic	DIN flange
Pump type	[kW]	[HP]	220-240V	△220-240V	Y380-415V	△380-415V	Y660-720V	H1	H2	H1	H2	D1	D2	D3		
SB(I/N)10-1	0.37	0.5	2.5 - 2.5	1.7 - 1.9	1.0 - 1.1	-----	-----	353	548	353	548	141	115	—	31.6	31.4
SB(I/N)10-2	0.75	1.0	5.1 - 4.1	3.4 - 3.4	2.0 - 2.0	-----	-----	357	592	357	592	141	115	—	34.3	34.2
SB(I/N)10-3	1.1	1.5	8.0 - 6.9	4.8 - 5.0	2.8 - 2.9	-----	-----	387	676	387	676	177	141	—	42.0	36.3
SB(I/N)10-4	1.5	2.0	9.5 - 8.9	6.2 - 6.6	3.6 - 3.8	-----	-----	433	728	433	728	177	141	—	47.1	46.0
SB(I/N)10-5	2.2	3.0	13.4 - 12.7	8.8 - 9.4	5.1 - 5.4	-----	-----	463	758	463	758	177	141	—	50.0	49.8
SB(I/N)10-6	2.2	3.0	13.4 - 12.7	8.8 - 9.4	5.1 - 5.4	-----	-----	493	788	493	788	177	141	—	51.0	50.8
SB(I/N)10-7	3.0	4.0	-----	11.8 - 12.3	6.8 - 7.1	6.8 - 6.9	3.9 - 4.0	528	844	528	844	197	147	—	60.5	60.3
SB(I/N)10-8	3.0	4.0	-----	11.8 - 12.3	6.8 - 7.1	6.8 - 6.9	3.9 - 4.0	558	874	558	874	197	147	—	61.5	61.4
SB(I/N)10-9	3.0	4.0	-----	11.8 - 12.3	6.8 - 7.1	6.8 - 6.9	3.9 - 4.0	588	904	588	904	197	147	—	62.5	62.4
SB(I/N)10-10	4.0	5.5	-----	15.1 - 15.2	8.7 - 8.8	8.7 - 8.3	5.0 - 4.8	618	944	618	944	220	161	—	67.6	67.4
SB(I/N)10-12	4.0	5.5	-----	15.1 - 15.2	8.7 - 8.8	8.7 - 8.3	5.0 - 4.8	678	1004	678	1004	220	161	—	69.6	69.5
SB(I/N)10-14	5.5	7.5	-----	18.7 - 18.0	10.8 - 10.4	10.9 - 10.8	6.3 - 6.2	770	1132	770	1132	235	197	300	99.7	99.6
SB(I/N)10-16	5.5	7.5	-----	18.7 - 18.0	10.8 - 10.4	10.9 - 10.8	6.3 - 6.2	830	1192	830	1192	235	197	300	101.8	101.7
SB(I/N)10-18	7.5	10	-----	25.5 - 24.9	14.7 - 14.4	14.9 - 14.8	8.6 - 8.5	890	1295	890	1295	235	197	300	109.8	111.7
SB(I/N)10-20	7.5	10	-----	25.5 - 24.9	14.7 - 14.4	14.9 - 14.8	8.6 - 8.5	950	1355	950	1355	235	197	300	111.9	113.8
SB(I/N)10-22	7.5	10	-----	25.5 - 24.9	14.7 - 14.4	14.9 - 14.8	8.6 - 8.5	1010	1415	1010	1415	235	197	300	114.0	114.9




SB, SBI, SBN 15

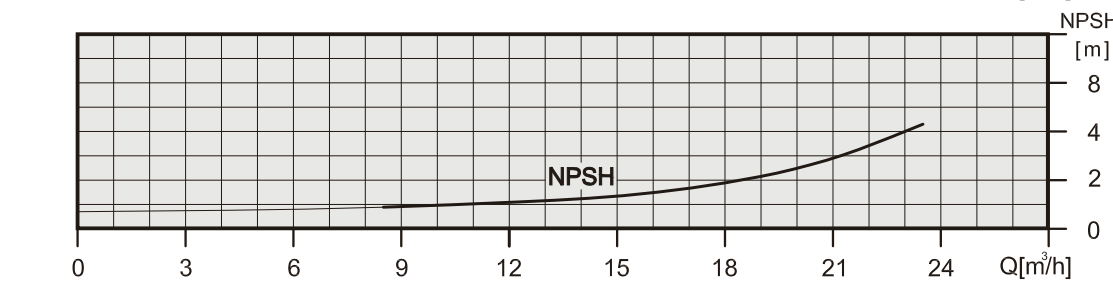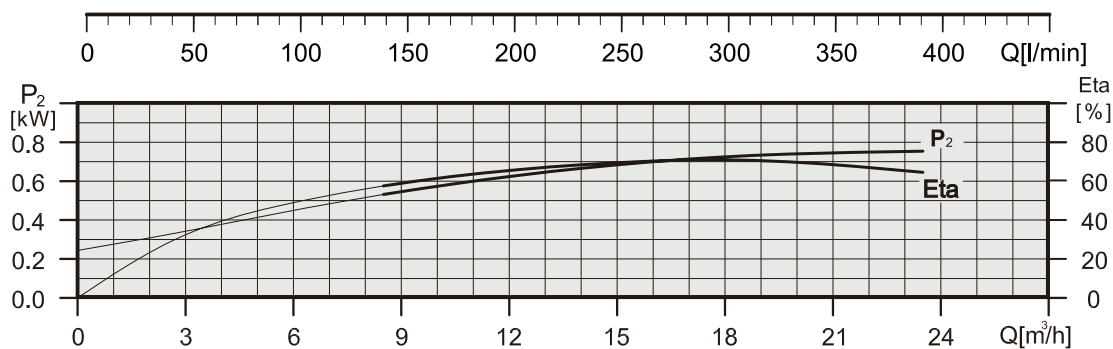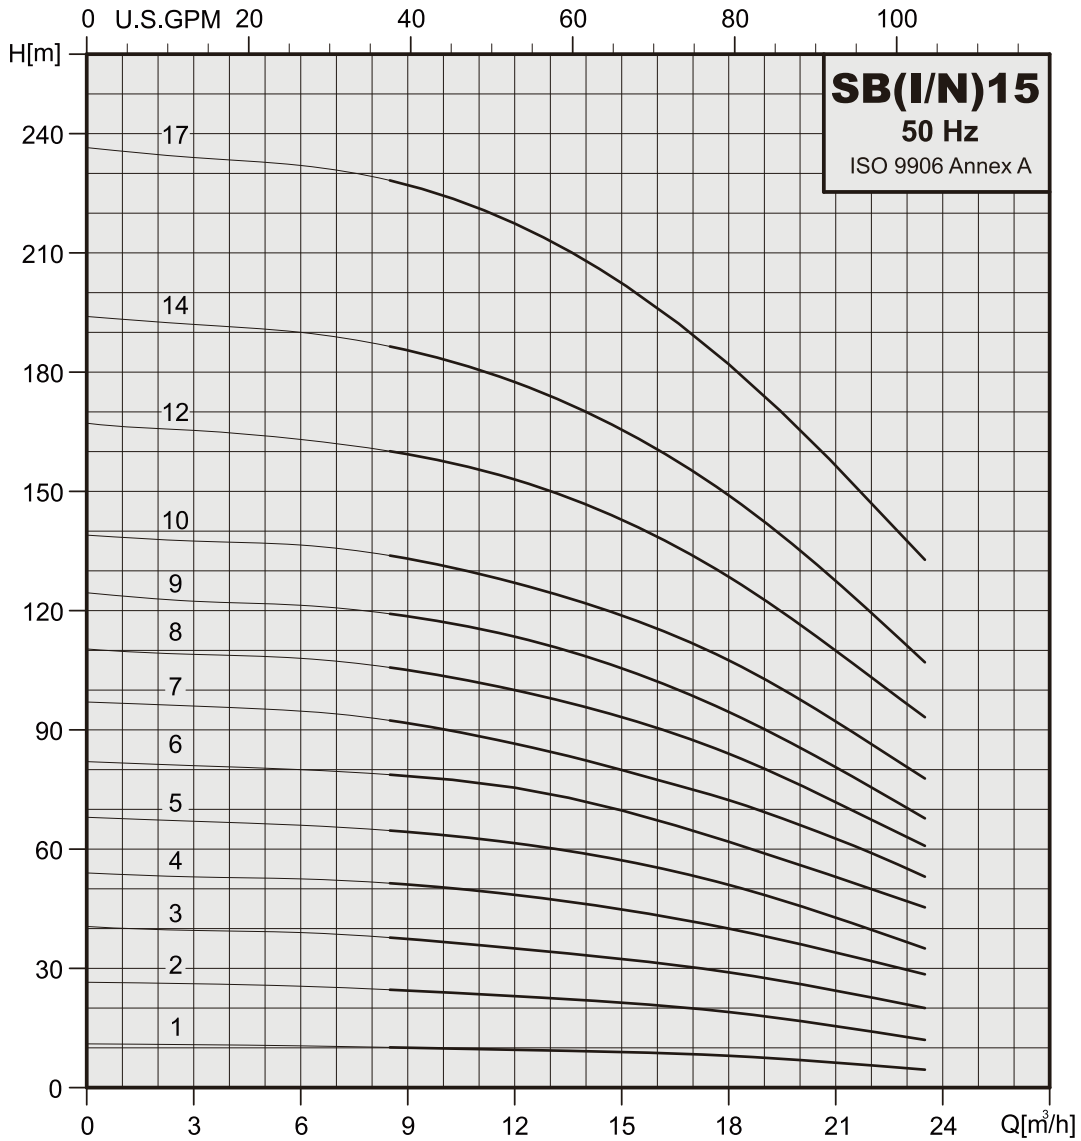



SB 15

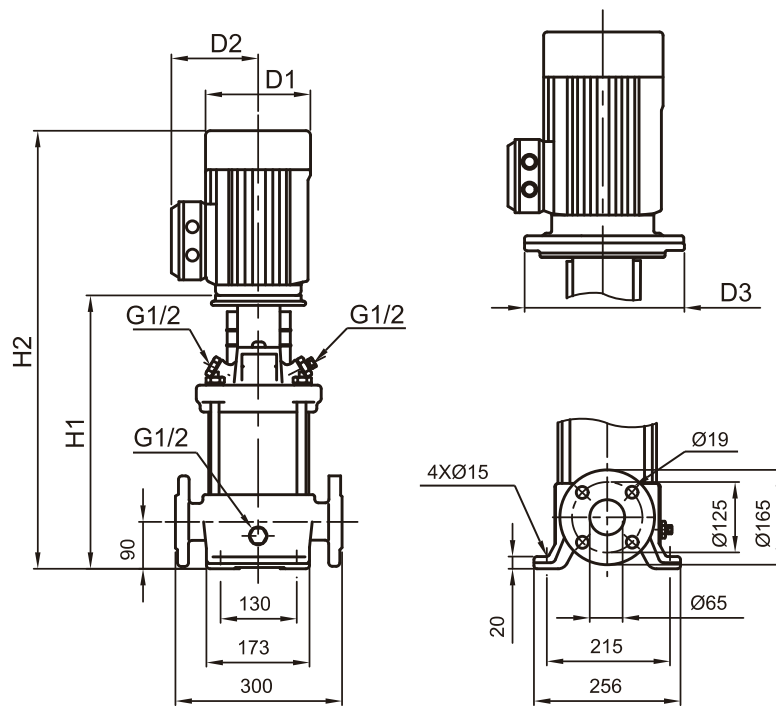

Flange(DIN)




PN16-25 / DN50

SB 15

50Hz	Motor		Nominal current [A]					Dimension[mm]					Net weight [kg]
	P ₂		1Ø	3Ø		3Ø		DIN flange		D1	D2	D3	
Pump type	[kW]	[HP]	220-240V	△220-240V	Y380-415V	△380-415V	Y660-720V	H1	H2	D1	D2	D3	
SB15-1	1.1	1.5	8.0 - 6.9	4.8 - 5.0	2.8 - 2.9	-----	-----	400	689	177	141	—	49.4
SB15-2	2.2	3.0	13.4 - 12.7	8.8 - 9.4	5.1 - 5.4	-----	-----	415	710	177	141	—	55.7
SB15-3	3.0	4.0	-----	11.8 - 12.3	6.8 - 7.1	6.8 - 6.9	3.9 - 4.0	465	781	197	147	—	66.3
SB15-4	4.0	5.5	-----	15.1 - 15.2	8.7 - 8.8	8.7 - 8.3	5.0 - 4.8	510	836	220	161	—	71.7
SB15-5	4.0	5.5	-----	15.1 - 15.2	8.7 - 8.8	8.7 - 8.3	5.0 - 4.8	555	881	220	161	—	73.2
SB15-6	5.5	7.5	-----	18.7 - 18.0	10.8 - 10.4	10.9 - 10.8	6.3 - 6.2	632	994	235	197	300	101.6
SB15-7	5.5	7.5	-----	18.7 - 18.0	10.8 - 10.4	10.9 - 10.8	6.3 - 6.2	677	1039	235	197	300	103.1
SB15-8	7.5	10	-----	25.5 - 24.9	14.7 - 14.4	14.9 - 14.8	8.6 - 8.5	722	1127	235	197	300	110.7
SB15-9	7.5	10	-----	25.5 - 24.9	14.7 - 14.4	14.9 - 14.8	8.6 - 8.5	767	1172	235	197	300	112.2
SB15-10	11.0	15	-----	38.8 - 39.1	22.4 - 22.6	22.9 - 23.8	13.2 - 13.7	889	1334	269	215	350	145.5
SB15-12	11.0	15	-----	38.8 - 39.1	22.4 - 22.6	22.9 - 23.8	13.2 - 13.7	979	1424	269	215	350	148.5
SB15-14	11.0	15	-----	38.8 - 39.1	22.4 - 22.6	22.9 - 23.8	13.2 - 13.7	1069	1514	269	215	350	151.8
SB15-17	15.0	20	-----	49.3 - 46.5	28.5 - 26.9	24.9 - 29.0	16.9 - 16.7	1204	1694	269	215	350	167.5




SB, SBI, SBN 15

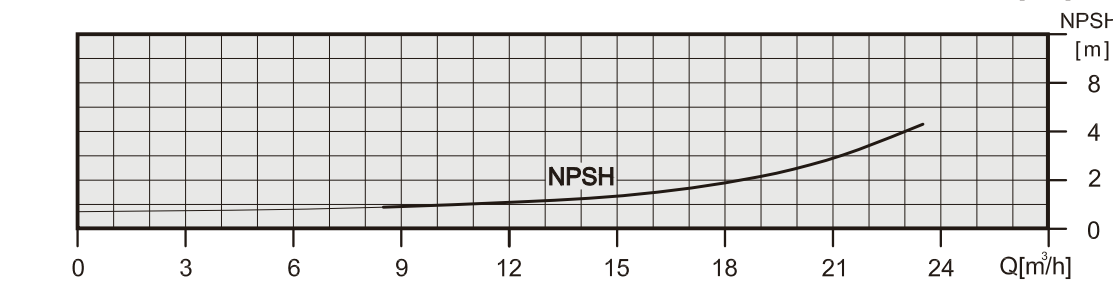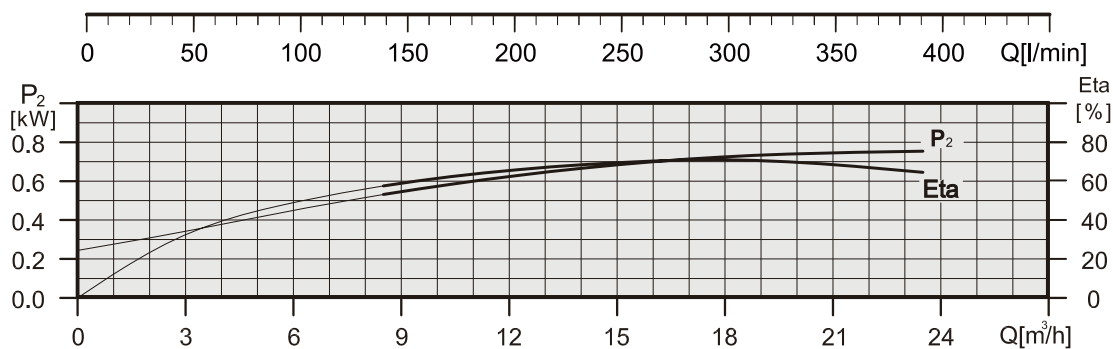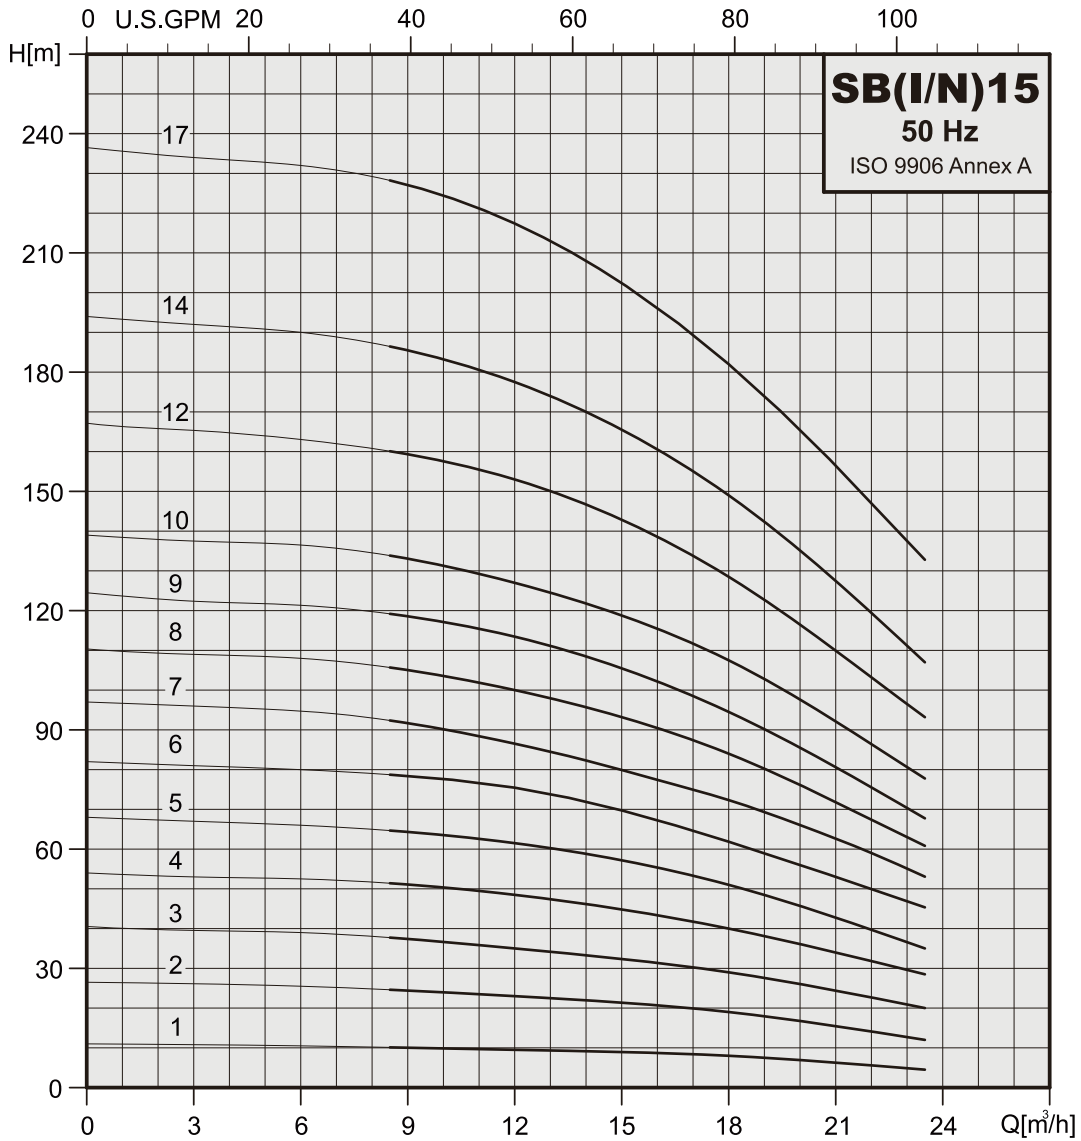



SBI / SBN 15

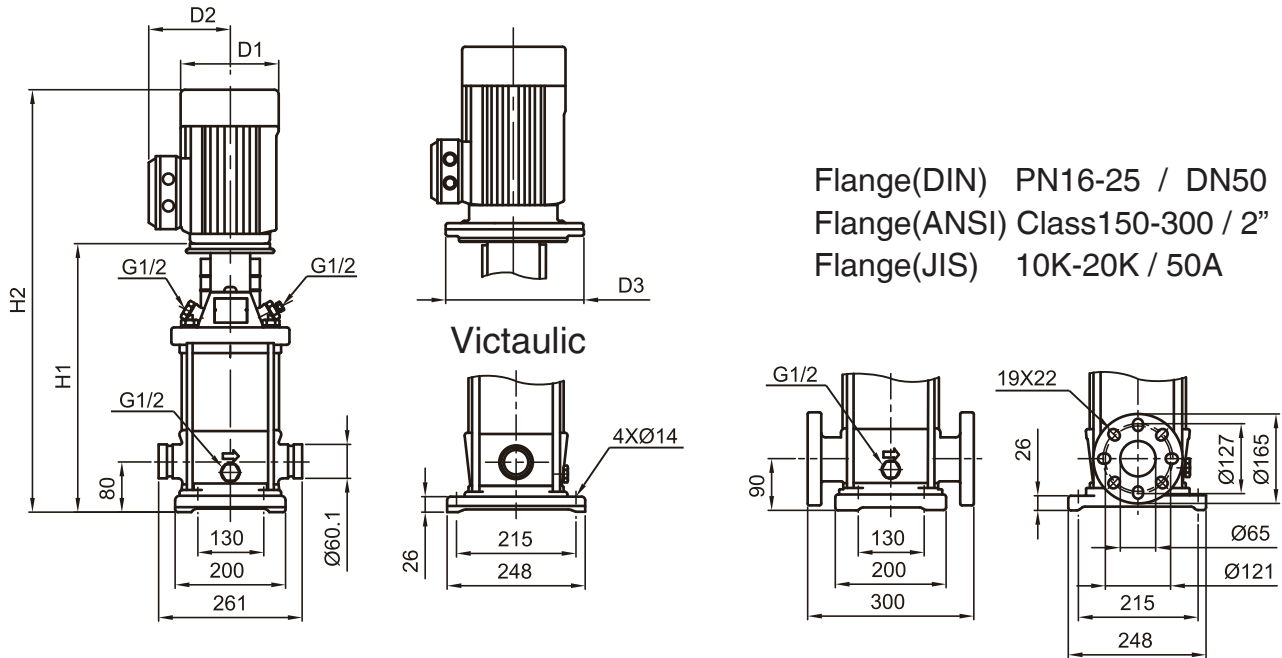


SBI ,SBN 15

50Hz	Motor		Nominal current [A]					Dimension[mm]						Net weight [kg]		
	P ₂		1φ	3φ		3φ	Vactaulic	DIN flange						Vactaulic	DIN flange	
Pump type	[kW]	[HP]	220-240V	△220-240V	Y380-415V	△380-415V	Y660-720V	H1	H2	H1	H2	D1	D2	D3		
SB(I/N)15-1	1.1	1.5	8.0 - 6.9	4.8 - 5.0	2.8 - 2.9	-----	-----	387	676	397	686	177	141	—	41.6	42.2
SB(I/N)15-2	2.2	3.0	13.4 - 12.7	8.8 - 9.4	5.1 - 5.4	-----	-----	403	698	413	708	177	141	—	47.7	48.3
SB(I/N)15-3	3.0	4.0	-----	11.8 - 12.3	6.8 - 7.1	6.8 - 6.9	3.9 - 4.0	453	769	463	779	197	147	—	57.5	58.1
SB(I/N)15-4	4.0	5.5	-----	15.1 - 15.2	8.7 - 8.8	8.7 - 8.3	5.0 - 4.8	498	824	508	834	220	161	—	63.0	63.6
SB(I/N)15-5	4.0	5.5	-----	15.1 - 15.2	8.7 - 8.8	8.7 - 8.3	5.0 - 4.8	543	869	553	879	220	161	—	64.4	65.0
SB(I/N)15-6	5.5	7.5	-----	18.7 - 18.0	10.8 - 10.4	10.9 - 10.8	6.3 - 6.2	620	982	630	992	235	197	300	93.9	94.6
SB(I/N)15-7	5.5	7.5	-----	18.7 - 18.0	10.8 - 10.4	10.9 - 10.8	6.3 - 6.2	665	1027	675	1037	235	197	300	95.4	96.0
SB(I/N)15-8	7.5	10	-----	25.5 - 24.9	14.7 - 14.4	14.9 - 14.8	8.6 - 8.5	710	1115	720	1125	235	197	300	103.0	106.6
SB(I/N)15-9	7.5	10	-----	25.5 - 24.9	14.7 - 14.4	14.9 - 14.8	8.6 - 8.5	755	1160	765	1170	235	197	300	104.5	105.1
SB(I/N)15-10	11.0	15	-----	38.8 - 39.1	22.4 - 22.6	22.9 - 23.8	13.2 - 13.7	877	1322	887	1332	269	215	350	138.2	138.8
SB(I/N)15-12	11.0	15	-----	38.8 - 39.1	22.4 - 22.6	22.9 - 23.8	13.2 - 13.7	967	1412	977	1422	269	215	350	141.0	141.7
SB(I/N)15-14	11.0	15	-----	38.8 - 39.1	22.4 - 22.6	22.9 - 23.8	13.2 - 13.7	1057	1502	1067	1512	269	215	350	144.0	144.6
SB(I/N)15-17	15.0	20	-----	49.3 - 46.5	28.5 - 26.9	24.9 - 29.0	16.9 - 16.7	1192	1682	1202	1692	269	215	350	158.9	159.5




SB, SBI, SBN 20

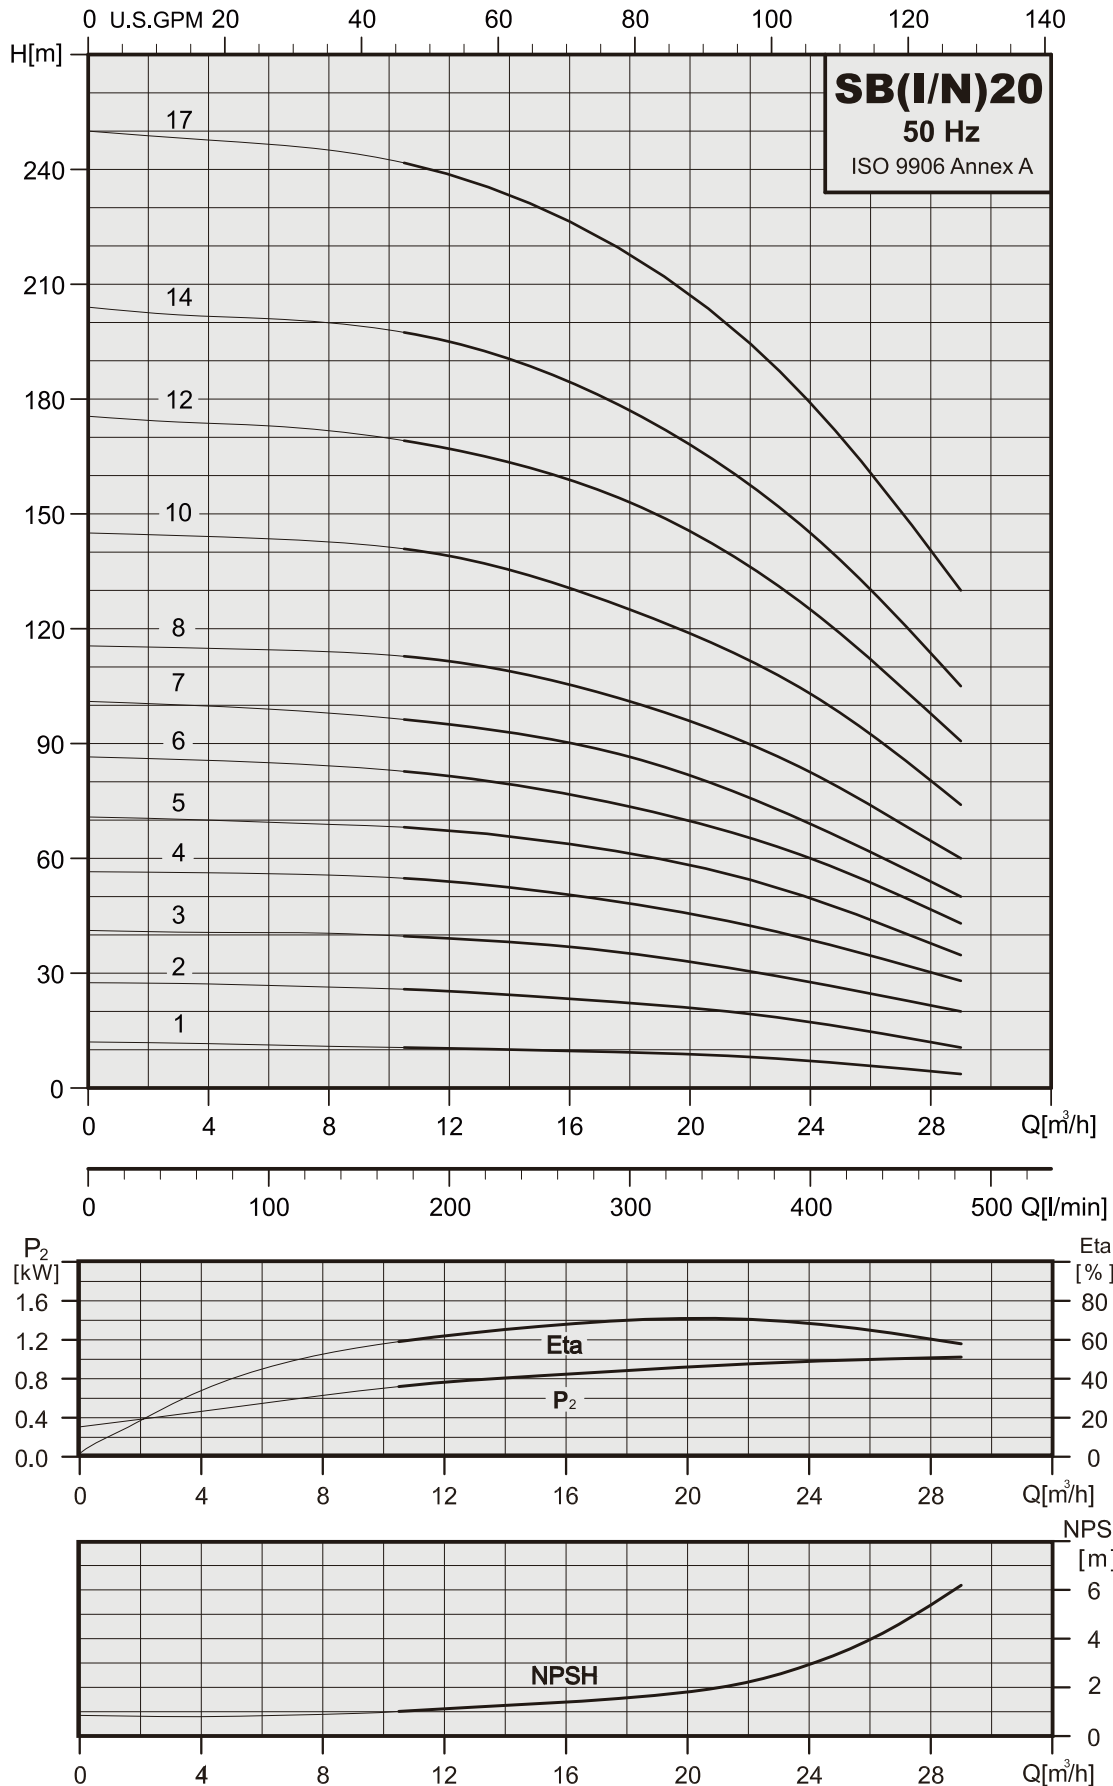



SB 20

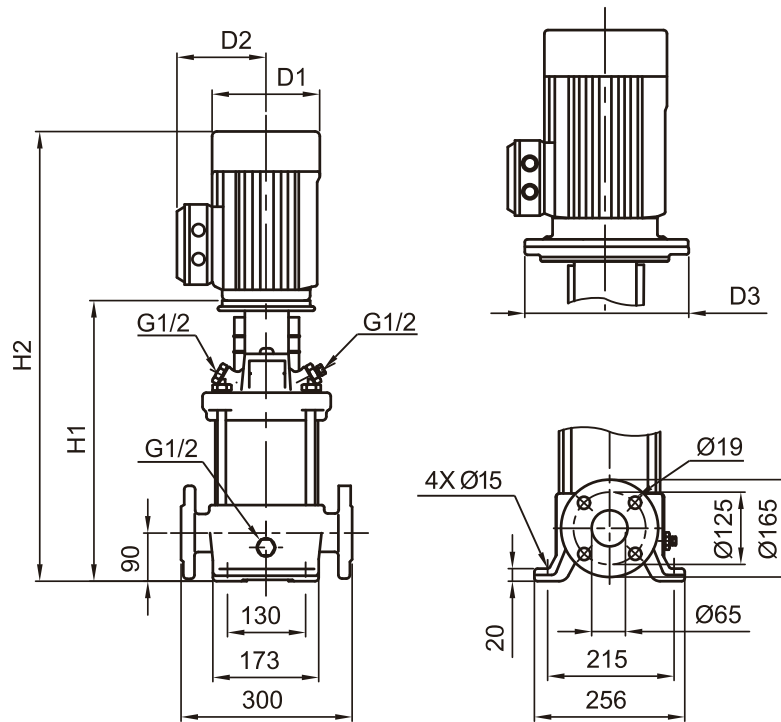


Flange(DIN)
PN16-25 / DN50

SB 20

50Hz	Motor		Nominal current [A]					Dimension[mm]					Net weight [kg]
	P ₂		1ø	3ø		3ø		DIN flange			D3		
Pump type	[kW]	[HP]	220-240V	△220-240V	Y380-415V	△380-415V	Y660-720V	H1	H2	D1	D2	D3	DIN flange
SB20-1	1.1	1.5	8.0 - 6.9	4.8 - 5.0	2.8 - 2.9	-----	-----	400	689	177	141	—	49.5
SB20-2	2.2	3.0	13.4 - 12.7	8.8 - 9.4	5.1 - 5.4	-----	-----	415	710	177	141	—	55.7
SB20-3	4.0	5.5	-----	15.1 - 15.2	8.7 - 8.8	8.7 - 8.3	5.0 - 4.8	465	791	220	161	—	70.3
SB20-4	5.5	7.5	-----	18.7 - 18.0	10.8 - 10.4	10.9 - 10.8	6.3 - 6.2	542	904	235	197	300	98.7
SB20-5	5.5	7.5	-----	18.7 - 18.0	10.8 - 10.4	10.9 - 10.8	6.3 - 6.2	587	949	235	197	300	100.1
SB20-6	7.5	10	-----	25.5 - 24.9	14.7 - 14.4	14.9 - 14.8	8.6 - 8.5	632	1037	235	197	300	107.5
SB20-7	7.5	10	-----	25.5 - 24.9	14.7 - 14.4	14.9 - 14.8	8.6 - 8.5	677	1082	235	197	300	109.0
SB20-8	11.0	15	-----	38.8 - 39.1	22.4 - 22.6	22.9 - 23.8	13.2 - 13.7	799	1244	269	215	350	142.6
SB20-10	11.0	15	-----	38.8 - 39.1	22.4 - 22.6	22.9 - 23.8	13.2 - 13.7	889	1334	269	215	350	145.5
SB20-12	15.0	20	-----	49.3 - 46.5	28.5 - 26.9	24.9 - 29.0	16.9 - 16.7	979	1469	269	215	350	159.1
SB20-14	15.0	20	-----	49.3 - 46.5	28.5 - 26.9	24.9 - 29.0	16.9 - 16.7	1069	1559	269	215	350	162.0
SB20-17	18.5	25	-----	60.2 - 55.4	34.8 - 32.0	35.2 - 33.5	20.3 - 19.3	1204	1744	318	241	350	199.4




SB, SBI, SBN 20

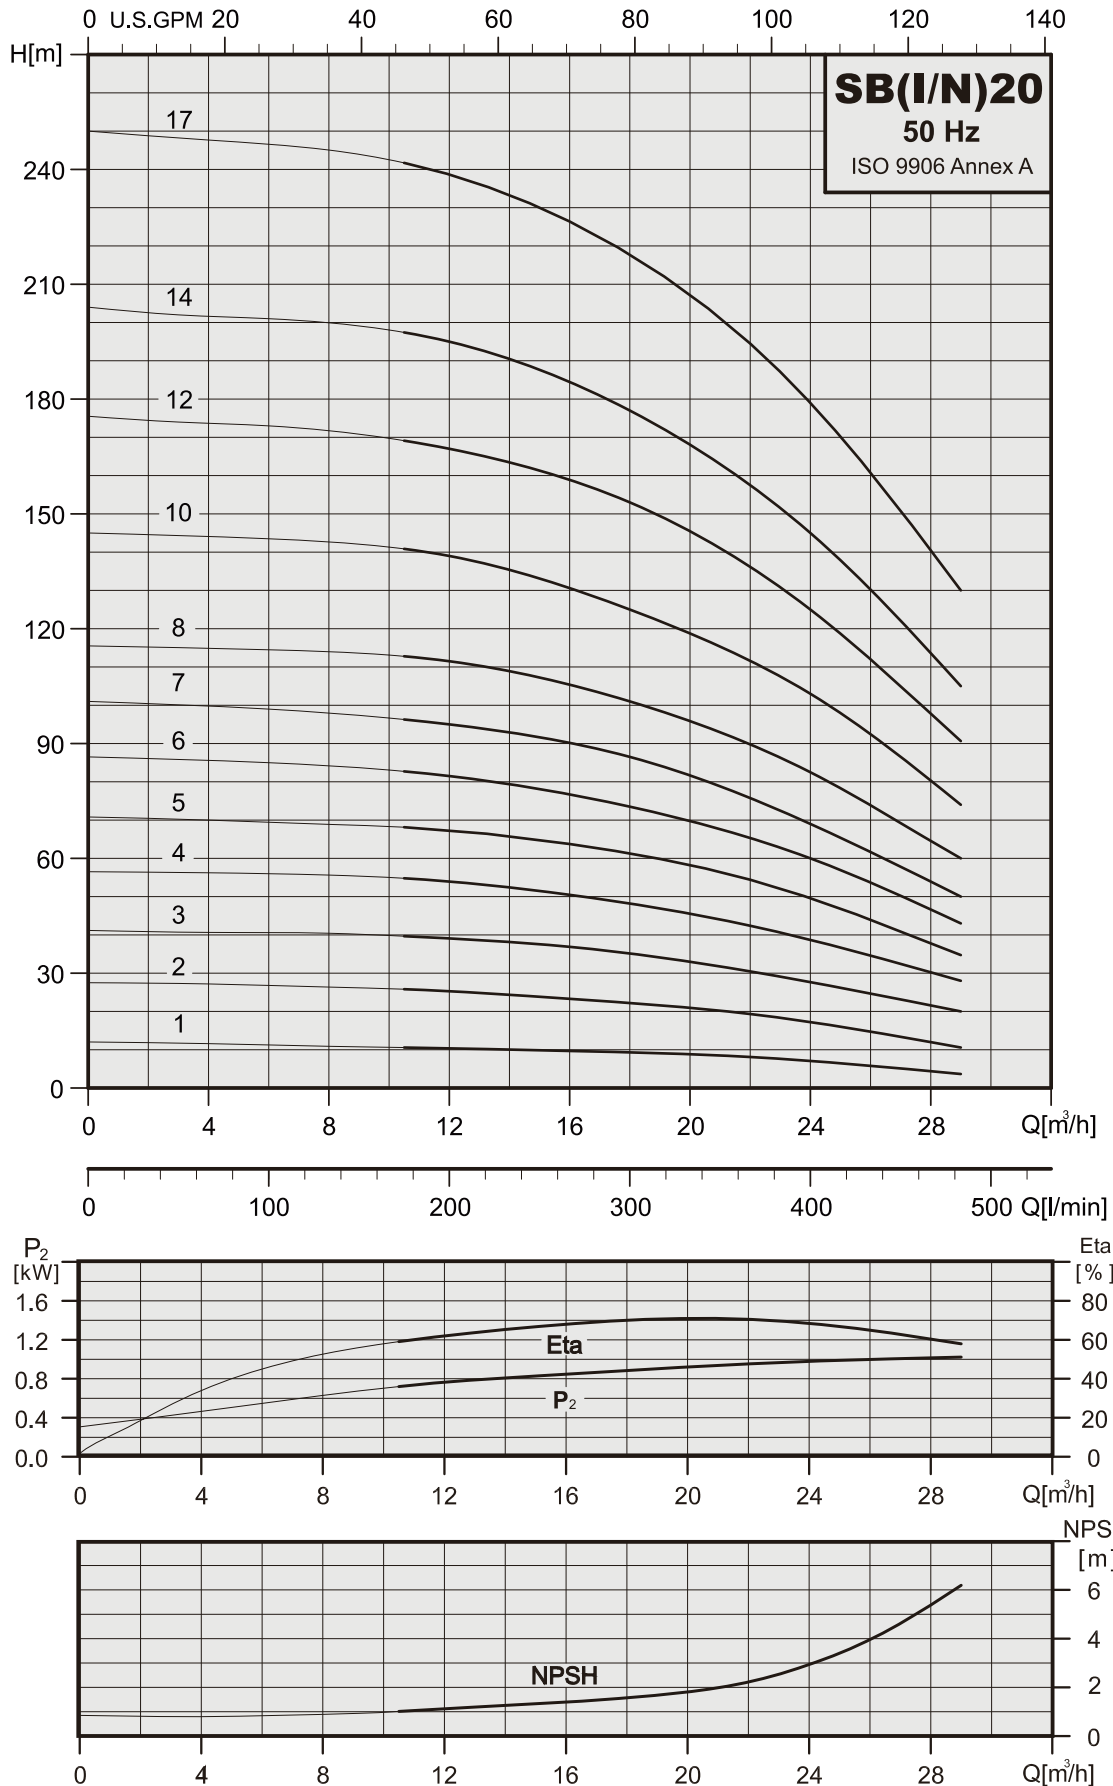



SBI / SBN 20

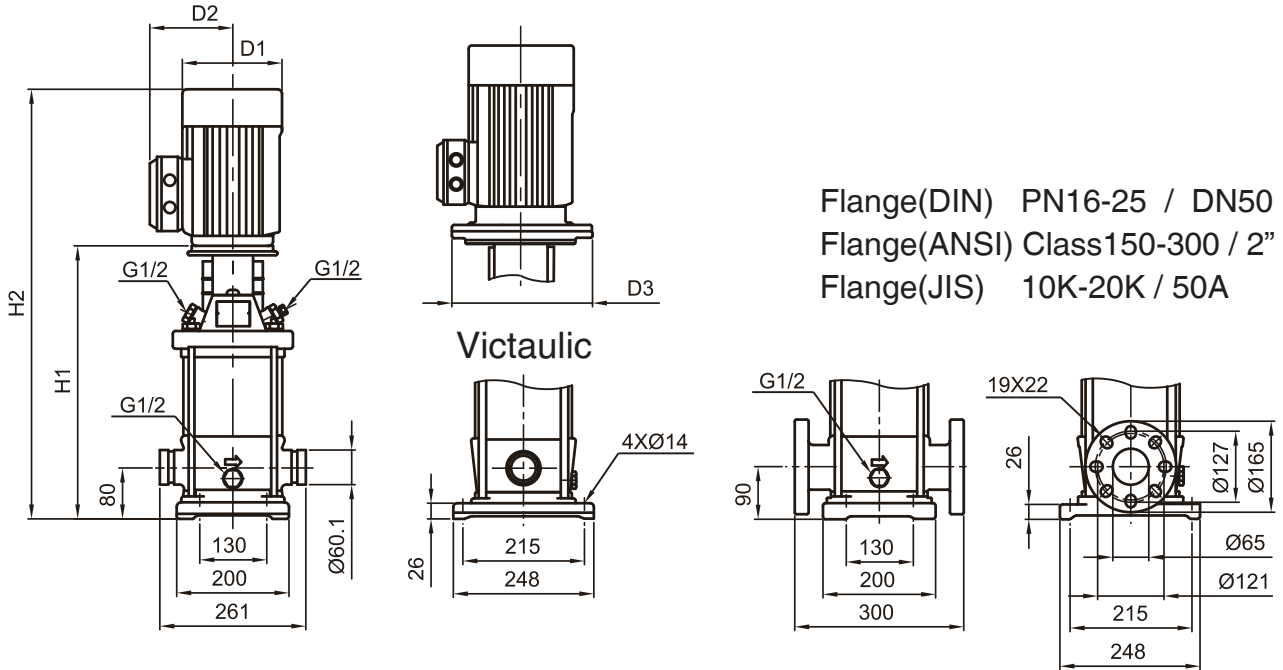

SBI ,SBN 20




50Hz	Motor		Nominal current [A]					Dimension[mm]						Net weight [kg]		
	P ₂		1Ø	3Ø		3Ø	Vactaulic		DIN flange		D1	D2	D3	Vactaulic	DIN flange	
Pump type	[kW]	[HP]	220-240V	△220-240V	Y380-415V	△380-415V	Y380-415V	H1	H2	H1	H2	D1	D2	D3	Vactaulic	DIN flange
SBI(N)20-1	1.1	1.5	8.0 - 6.9	4.8 - 5.0	2.8 - 2.9	-----	-----	387	676	397	686	177	141	—	42.6	42.2
SBI(N)20-2	2.2	3.0	13.4 - 12.7	8.8 - 9.4	5.1 - 5.4	-----	-----	403	698	413	708	177	141	—	47.7	48.3
SBI(N)20-3	4.0	5.5	-----	15.1 - 15.2	8.7 - 8.8	8.7 - 8.3	5.0 - 4.8	453	779	463	789	220	161	—	61.5	62.2
SBI(N)20-4	5.5	7.5	-----	18.7 - 18.0	10.8 - 10.4	10.9 - 10.8	6.3 - 6.2	530	892	540	902	235	197	300	91.0	91.6
SBI(N)20-5	5.5	7.5	-----	18.7 - 18.0	10.8 - 10.4	10.9 - 10.8	6.3 - 6.2	575	937	585	947	235	197	300	92.5	93.1
SBI(N)20-6	7.5	10	-----	25.5 - 24.9	14.7 - 14.4	14.9 - 14.8	8.6 - 8.5	620	1025	630	1035	235	197	300	99.8	100.5
SBI(N)20-7	7.5	10	-----	25.5 - 24.9	14.7 - 14.4	14.9 - 14.8	8.6 - 8.5	665	1070	675	1080	235	197	300	101.3	101.9
SBI(N)20-8	11.0	15	-----	38.8 - 39.1	22.4 - 22.6	22.9 - 23.8	13.2 - 13.7	787	1232	797	1242	269	215	350	135.2	135.8
SBI(N)20-10	11.0	15	-----	38.8 - 39.1	22.4 - 22.6	22.9 - 23.8	13.2 - 13.7	877	1322	887	1332	269	215	350	138.2	138.8
SBI(N)20-12	15.0	20	-----	49.3 - 46.5	28.5 - 26.9	24.9 - 29.0	16.9 - 16.7	967	1457	977	1467	269	215	350	151.7	152.3
SBI(N)20-14	15.0	20	-----	49.3 - 46.5	28.5 - 26.9	24.9 - 29.0	16.9 - 16.7	1057	1547	1067	1557	269	215	350	154.6	155.2
SBI(N)20-17	18.5	25	-----	60.2 - 55.4	34.8 - 32.0	35.2 - 33.5	20.3 - 19.3	1192	1732	1202	1742	318	241	350	191.8	192.4

Performance Curves

SB(I/N) 32


Vertical Multistage Centrifugal In-line Pumps

SB, SBI, SBN 32

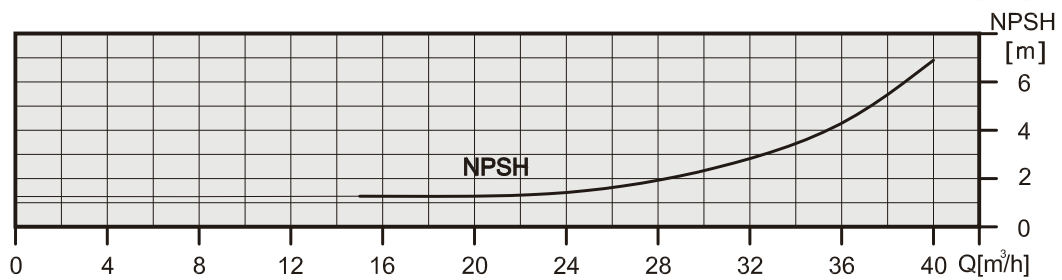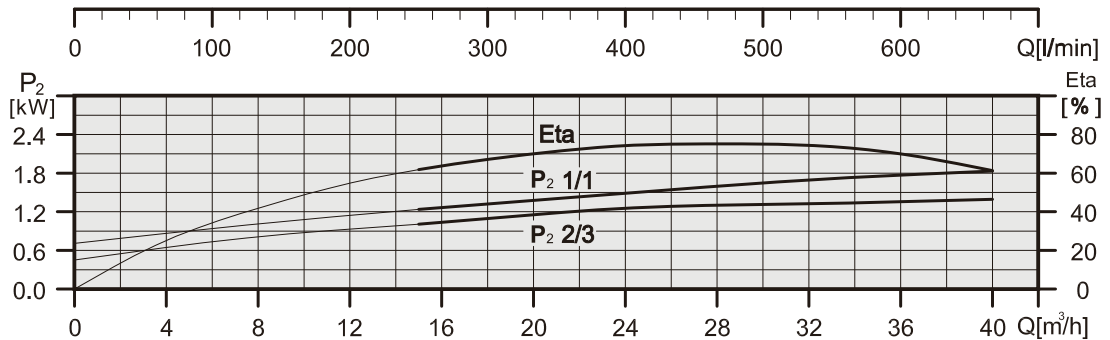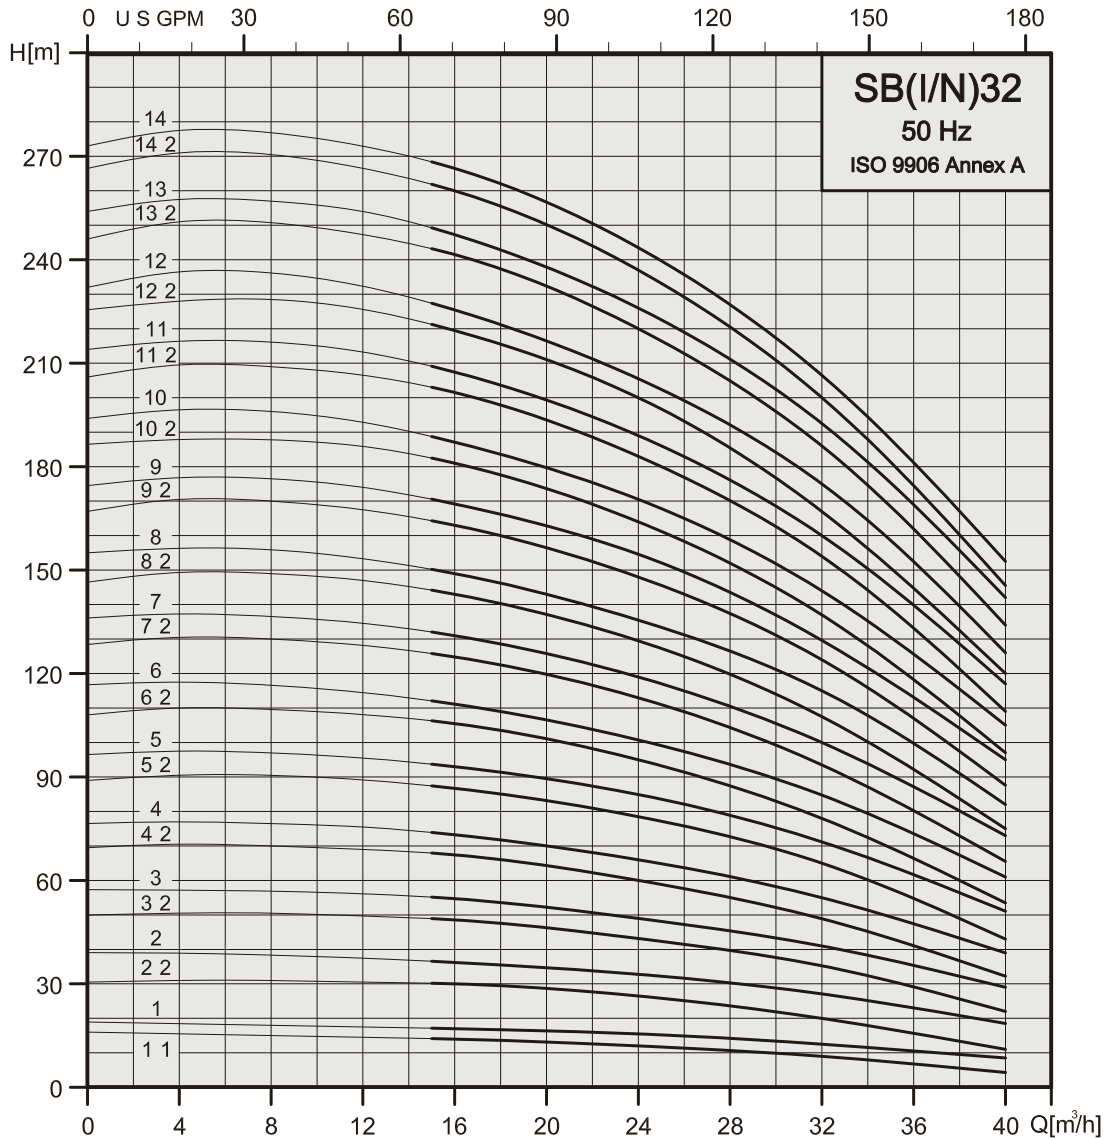



SB 32

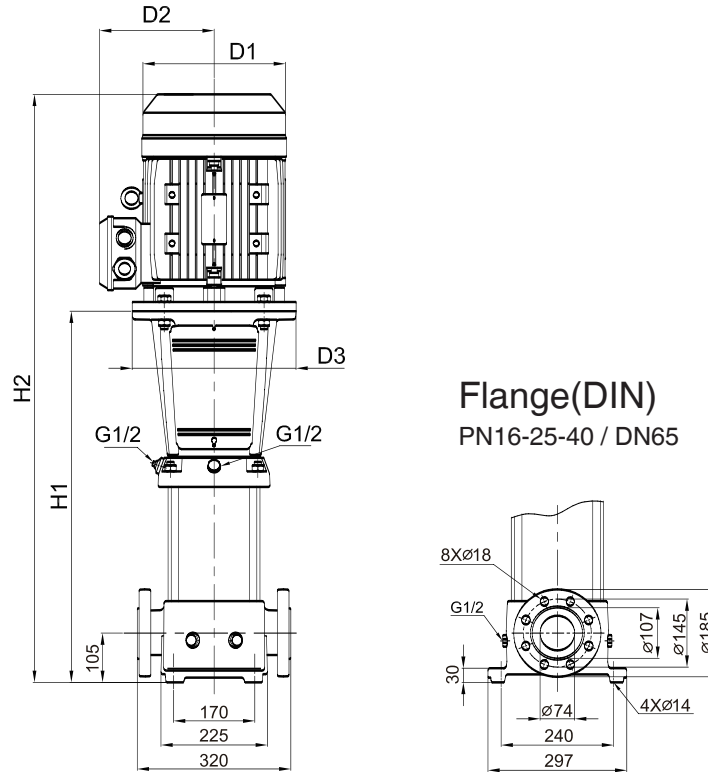

Flange(DIN)
PN16-25-40 / DN65

SB 32

50Hz	Motor		Nominal current [A]					Dimension[mm]					Net weight [kg]
	P ₂		1Ø	3Ø		3Ø	DIN flange		D1	D2	D3	DIN flange	
Pump type	[kW]	[HP]	220-240V	△220-240V	Y380-415V	△380-415V	Y660-720V	H1	H2	D1	D2	D3	DIN flange
SB 32-1-1	1.5	2.0	6.2 - 6.6	9.5 - 8.9	3.6 - 3.8	-----	-----	504	799	177	141	280	72.5
SB 32-1	2.2	3.0	13.4 - 12.7	8.8 - 9.4	5.1 - 5.4	-----	-----	504	799	177	141	280	74.3
SB 32-2-2	3.0	4.0	-----	11.8 - 12.3	6.8 - 7.1	6.8 - 6.9	3.9 - 4.0	574	890	197	147	280	85.6
SB 32-2	4.0	5.5	-----	15.1 - 15.2	8.7 - 8.8	8.7 - 8.3	5.0 - 4.8	574	900	220	161	280	89.6
SB 32-3-2	5.5	5.5	-----	18.7 - 18.0	10.8 - 10.4	10.9 - 10.8	6.3 - 6.2	644	1006	235	197	300	109.5
SB 32-3	5.5	7.5	-----	18.7 - 18.0	10.8 - 10.4	10.9 - 10.8	6.3 - 6.2	644	1006	235	197	300	109.5
SB 32-4-2	7.5	10	-----	25.5 - 24.9	14.7 - 14.4	14.9 - 14.8	8.6 - 8.5	714	1119	235	197	300	118.4
SB 32-4	7.5	10	-----	25.5 - 24.9	14.7 - 14.4	14.9 - 14.8	8.6 - 8.5	714	1119	235	197	300	118.4
SB 32-5-2	11.0	15	-----	38.8 - 39.1	22.4 - 22.6	22.9 - 23.8	13.2 - 13.7	894	1339	269	215	350	158.8
SB 32-5	11.0	15	-----	38.8 - 39.1	22.4 - 22.6	22.9 - 23.8	13.2 - 13.7	894	1339	269	215	350	158.8
SB 32-6-2	11.0	15	-----	38.8 - 39.1	22.4 - 22.6	22.9 - 23.8	13.2 - 13.7	964	1409	269	215	350	161.8
SB 32-6	11.0	15	-----	38.8 - 39.1	22.4 - 22.6	22.9 - 23.8	13.2 - 13.7	964	1409	269	215	350	161.8
SB 32-7-2	15.0	20	-----	49.3 - 46.5	28.5 - 26.9	24.9 - 29.0	16.9 - 16.7	1034	1524	269	215	350	175.5
SB 32-7	15.0	20	-----	49.3 - 46.5	28.5 - 26.9	24.9 - 29.0	16.9 - 16.7	1034	1524	269	215	350	175.5
SB 32-8-2	15.0	20	-----	49.3 - 46.5	28.5 - 26.9	24.9 - 29.0	16.9 - 16.7	1104	1594	269	215	350	178.6
SB 32-8	15.0	20	-----	49.3 - 46.5	28.5 - 26.9	24.9 - 29.0	16.9 - 16.7	1104	1594	269	215	350	178.6
SB 32-9-2	18.5	25	-----	60.2 - 55.4	34.8 - 32.0	35.2 - 33.5	20.3 - 19.3	1174	1714	318	241	350	214.6
SB 32-9	18.5	25	-----	60.2 - 55.4	34.8 - 32.0	35.2 - 33.5	20.3 - 19.3	1174	1714	318	241	350	214.6
SB 32-10-2	18.5	25	-----	60.2 - 55.4	34.8 - 32.0	35.2 - 33.5	20.3 - 19.3	1244	1784	318	241	350	217.7
SB 32-10	18.5	25	-----	60.2 - 55.4	34.8 - 32.0	35.2 - 33.5	20.3 - 19.3	1244	1784	318	241	350	217.7
SB 32-11-2	22.0	30	-----	71.3 - 67.5	41.2 - 39.0	41.3 - 39.6	23.8 - 22.8	1314	1854	318	241	350	232.8
SB 32-11	22.0	30	-----	71.3 - 67.5	41.2 - 39.0	41.3 - 39.6	23.8 - 22.8	1314	1854	318	241	350	232.8
SB 32-12-2	22.0	30	-----	71.3 - 67.5	41.2 - 39.0	41.3 - 39.6	23.8 - 22.8	1384	1924	318	241	350	234.8
SB 32-12	22.0	30	-----	71.3 - 67.5	41.2 - 39.0	41.3 - 39.6	23.8 - 22.8	1384	1924	318	241	350	234.8
SB 32-13-2	30.0	40	-----	-----	-----	55.4 - 50.7	31.9 - 29.2	1454	2114	390	295	400	341.2
SB 32-13	30.0	40	-----	-----	-----	55.4 - 50.7	31.9 - 29.2	1454	2114	390	295	400	341.2
SB 32-14-2	30.0	40	-----	-----	-----	55.4 - 50.7	31.9 - 29.2	1524	2184	390	295	400	344.3
SB 32-14	30.0	40	-----	-----	-----	55.4 - 50.7	31.9 - 29.2	1524	2184	390	295	400	344.3

Performance Curves




Vertical Multistage Centrifugal In-line Pumps

SB(I/N) 32




STAIRS PUMPS

SB, SBI, SBN 32

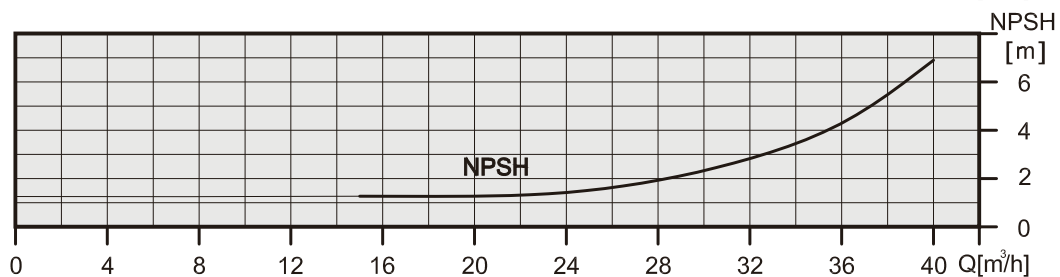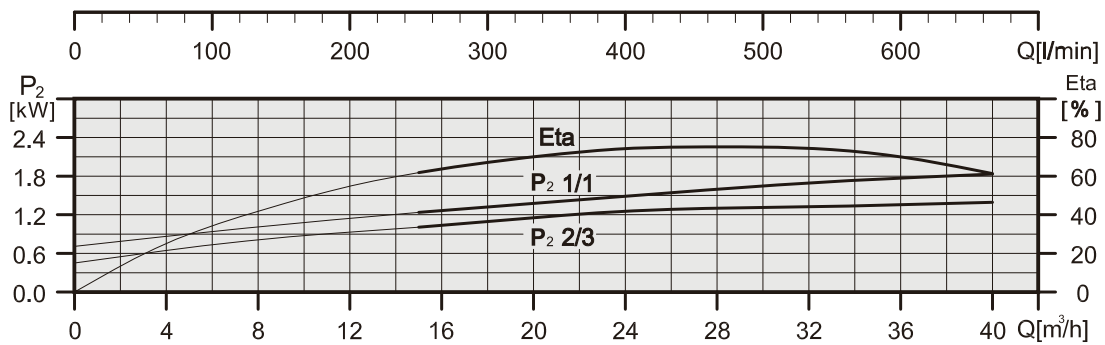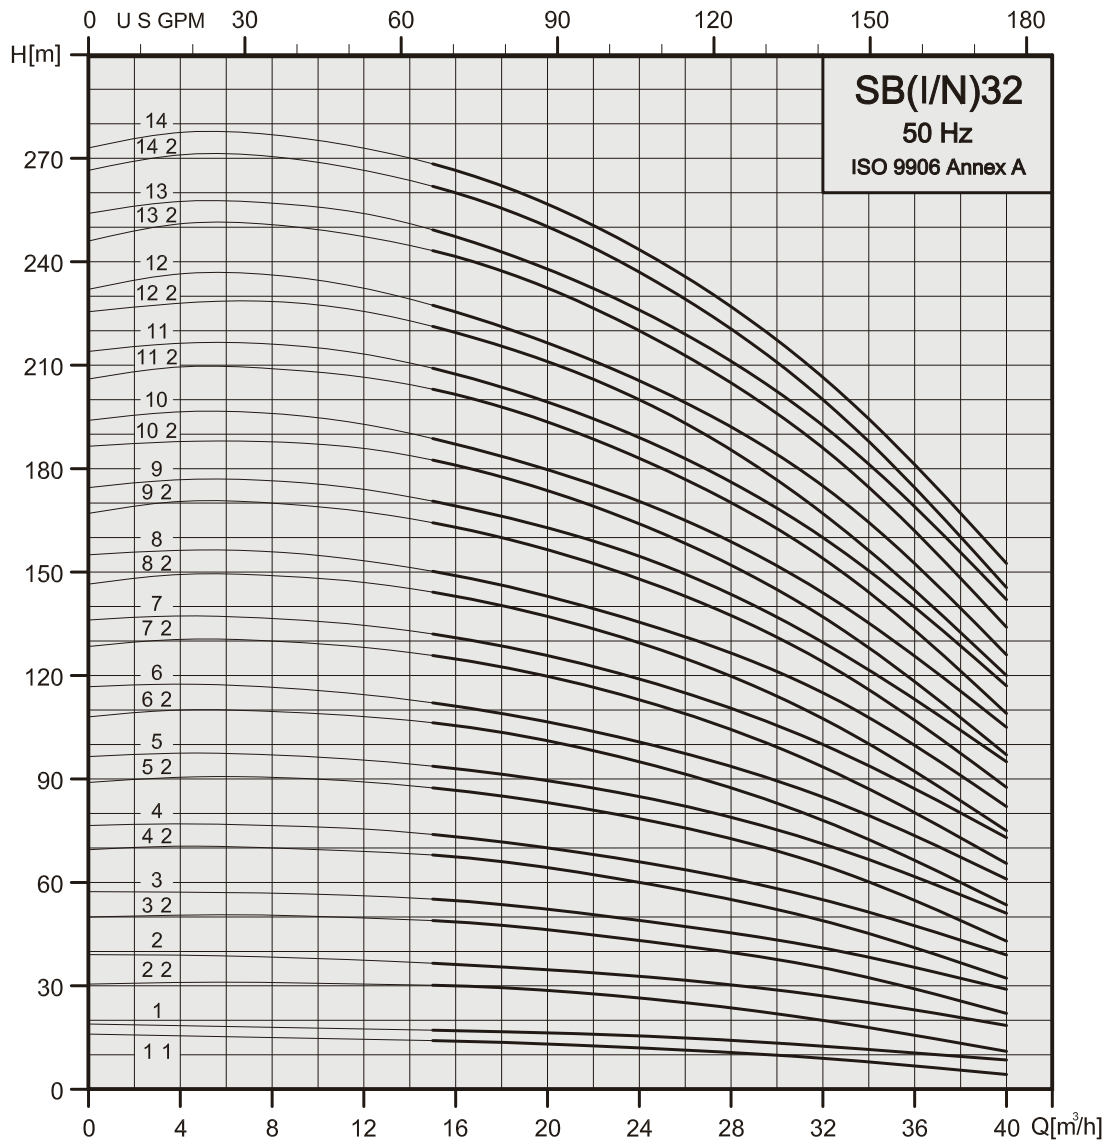



SBI / SBN 32

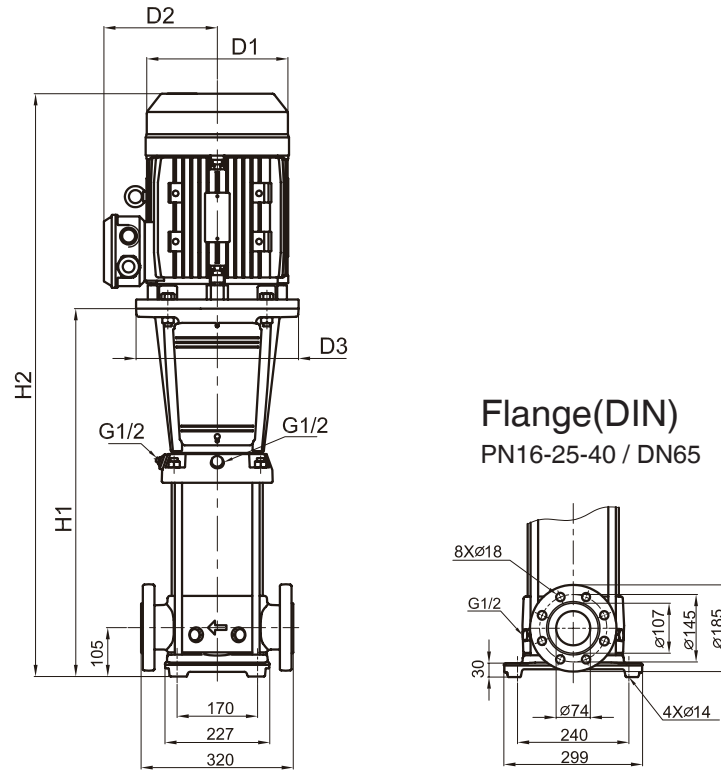

SBI ,SBN 32

50Hz	Motor		Nominal current [A]					Dimension[mm]					Net weight [kg]
	P ₂	[kW]	[HP]	1Ø	3Ø		3Ø	DIN flange		D1	D2	D3	
Pump type	[kW]	[HP]	220-240V	△220-240V	Y380-415V	△380-415V	Y660-720V	H1	H2	D1	D2	D3	DIN flange
SBI(N) 32-1-1	1.5	2.0	6.2 - 6.6	9.5 - 8.9	3.6 - 3.8	-----	-----	504	799	177	141	280	67.5
SBI(N) 32-1	2.2	3.0	13.4 - 12.7	8.8 - 9.4	5.1 - 5.4	-----	-----	504	799	177	141	280	69.3
SBI(N) 32-2-2	3.0	4.0	-----	11.8 - 12.3	6.8 - 7.1	6.8 - 6.9	3.9 - 4.0	574	890	197	147	280	80.5
SBI(N) 32-2	4.0	5.5	-----	15.1 - 15.2	8.7 - 8.8	8.7 - 8.3	5.0 - 4.8	574	900	220	161	280	84.5
SBI(N) 32-3-2	5.5	5.5	-----	18.7 - 18.0	10.8 - 10.4	10.9 - 10.8	6.3 - 6.2	644	1006	235	197	300	104.4
SBI(N) 32-3	5.5	7.5	-----	18.7 - 18.0	10.8 - 10.4	10.9 - 10.8	6.3 - 6.2	644	1006	235	197	300	104.4
SBI(N) 32-4-2	7.5	10	-----	25.5 - 24.9	14.7 - 14.4	14.9 - 14.8	8.6 - 8.5	714	1119	235	197	300	113.5
SBI(N) 32-4	7.5	10	-----	25.5 - 24.9	14.7 - 14.4	14.9 - 14.8	8.6 - 8.5	714	1119	235	197	300	113.5
SBI(N) 32-5-2	11.0	15	-----	38.8 - 39.1	22.4 - 22.6	22.9 - 23.8	13.2 - 13.7	894	1339	269	215	350	153.8
SBI(N) 32-5	11.0	15	-----	38.8 - 39.1	22.4 - 22.6	22.9 - 23.8	13.2 - 13.7	894	1339	269	215	350	153.8
SBI(N) 32-6-2	11.0	15	-----	38.8 - 39.1	22.4 - 22.6	22.9 - 23.8	13.2 - 13.7	964	1409	269	215	350	156.9
SBI(N) 32-6	11.0	15	-----	38.8 - 39.1	22.4 - 22.6	22.9 - 23.8	13.2 - 13.7	964	1409	269	215	350	156.9
SBI(N) 32-7-2	15.0	20	-----	49.3 - 46.5	28.5 - 26.9	24.9 - 29.0	16.9 - 16.7	1034	1524	269	215	350	170.6
SBI(N) 32-7	15.0	20	-----	49.3 - 46.5	28.5 - 26.9	24.9 - 29.0	16.9 - 16.7	1034	1524	269	215	350	170.6
SBI(N) 32-8-2	15.0	20	-----	49.3 - 46.5	28.5 - 26.9	24.9 - 29.0	16.9 - 16.7	1104	1594	269	215	350	173.9
SBI(N) 32-8	15.0	20	-----	49.3 - 46.5	28.5 - 26.9	24.9 - 29.0	16.9 - 16.7	1104	1594	269	215	350	173.9
SBI(N) 32-9-2	18.5	25	-----	60.2 - 55.4	34.8 - 32.0	35.2 - 33.5	20.3 - 19.3	1174	1714	318	241	350	201.6
SBI(N) 32-9	18.5	25	-----	60.2 - 55.4	34.8 - 32.0	35.2 - 33.5	20.3 - 19.3	1174	1714	318	241	350	201.6
SBI(N) 32-10-2	18.5	25	-----	60.2 - 55.4	34.8 - 32.0	35.2 - 33.5	20.3 - 19.3	1244	1784	318	241	350	204.2
SBI(N) 32-10	18.5	25	-----	60.2 - 55.4	34.8 - 32.0	35.2 - 33.5	20.3 - 19.3	1244	1784	318	241	350	204.2
SBI(N) 32-11-2	22.0	30	-----	71.3 - 67.5	41.2 - 39.0	41.3 - 39.6	23.8 - 22.8	1314	1854	318	241	350	227.6
SBI(N) 32-11	22.0	30	-----	71.3 - 67.5	41.2 - 39.0	41.3 - 39.6	23.8 - 22.8	1314	1854	318	241	350	227.6
SBI(N) 32-12-2	22.0	30	-----	71.3 - 67.5	41.2 - 39.0	41.3 - 39.6	23.8 - 22.8	1384	1924	318	241	350	230.3
SBI(N) 32-12	22.0	30	-----	71.3 - 67.5	41.2 - 39.0	41.3 - 39.6	23.8 - 22.8	1384	1924	318	241	350	230.3
SBI(N) 32-13-2	30.0	40	-----	-----	-----	55.4 - 50.7	31.9 - 29.2	1454	2114	390	295	400	336.6
SBI(N) 32-13	30.0	40	-----	-----	-----	55.4 - 50.7	31.9 - 29.2	1454	2114	390	295	400	336.6
SBI(N) 32-14-2	30.0	40	-----	-----	-----	55.4 - 50.7	31.9 - 29.2	1524	2184	390	295	400	339.3
SBI(N) 32-14	30.0	40	-----	-----	-----	55.4 - 50.7	31.9 - 29.2	1524	2184	390	295	400	339.3

Performance Curves




Vertical Multistage Centrifugal In-line Pumps

SB(I/N) 45



STAIRS PUMPS

SB, SBI, SBN 45

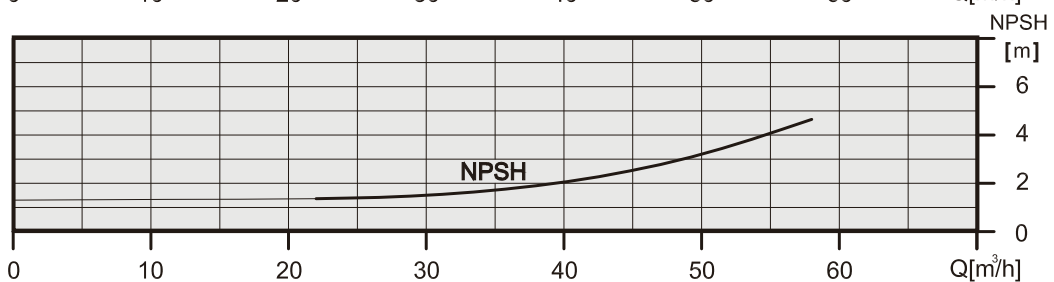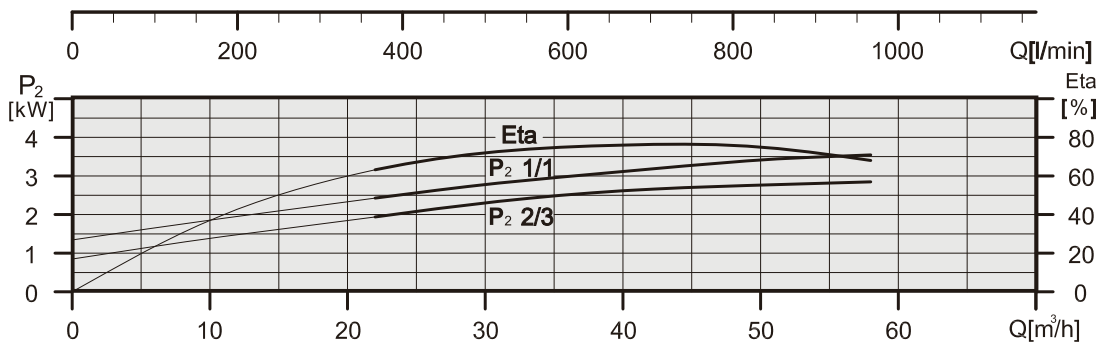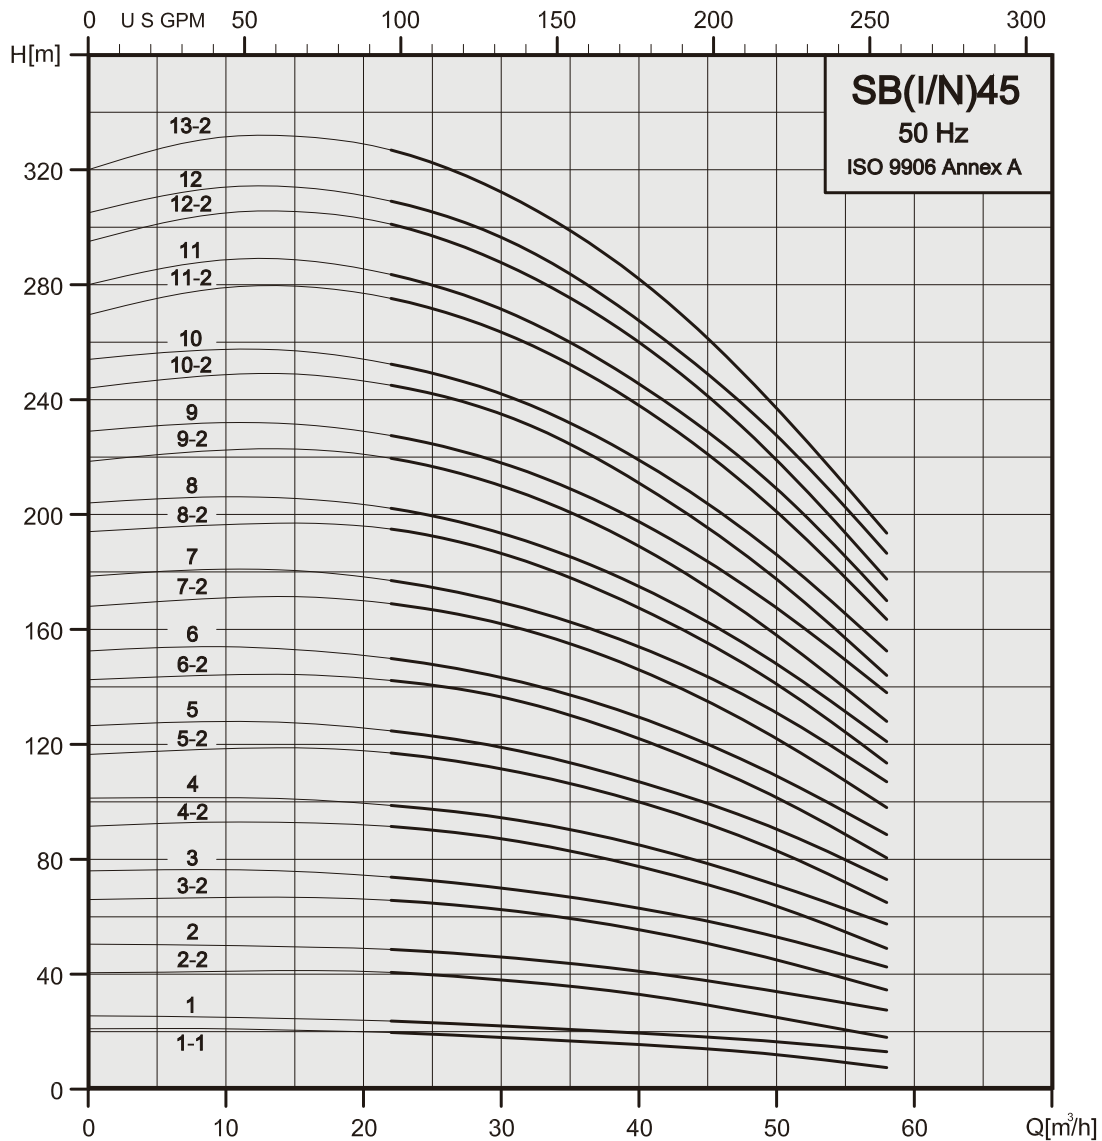

Technical data

Vertical Multistage Centrifugal In-line Pumps


SB(I/N) 45



STAIRS PUMPS

SB 45


50Hz Pump type	Motor		Nominal current [A]				Dimension[mm]					Net weight [kg] DIN flange
	P ₂		3φ		3φ		DIN flange		D1	D2	D3	
	[kW]	[HP]	△220-240V	Y380-415V	△380-415V	Y660-720V	H1	H2				
SB 45-1-1	3.0	4.0	11.8 - 12.3	6.8 - 7.1	6.8 - 6.9	3.9 - 4.0	561	877	197	147	280	93.1
SB 45-1	4.0	5.5	15.1 - 15.2	8.7 - 8.8	8.7 - 8.3	5.0 - 4.8	561	887	220	161	280	97.1
SB 45-2-2	5.5	7.5	18.7 - 18.0	10.8 - 10.4	10.9 - 10.8	6.3 - 6.2	641	1003	235	197	300	117.6
SB 45-2	7.5	10	25.5 - 24.9	14.7 - 14.4	14.9 - 14.8	8.6 - 8.5	641	1046	235	197	300	123.5
SB 45-3-2	11.0	15	38.8 - 39.1	22.4 - 22.6	22.9 - 23.8	13.2 - 13.7	831	1276	269	215	350	164.5
SB 45-3	11.0	15	38.8 - 39.1	22.4 - 22.6	22.9 - 23.8	13.2 - 13.7	831	1276	269	215	350	164.5
SB 45-4-2	15.0	20	49.3 - 46.5	28.5 - 26.9	24.9 - 29.0	16.9 - 16.7	911	1401	269	215	350	178.9
SB 45-4	15.0	20	49.3 - 46.5	28.5 - 26.9	24.9 - 29.0	16.9 - 16.7	911	1401	269	215	350	178.9
SB 45-5-2	18.5	25	60.2 - 55.4	34.8 - 32.0	35.2 - 33.5	20.3 - 19.3	991	1531	318	241	350	215.6
SB 45-5	18.5	25	60.2 - 55.4	34.8 - 32.0	35.2 - 33.5	20.3 - 19.3	991	1531	318	241	350	215.6
SB 45-6-2	22.0	30	71.3 - 67.5	41.2 - 39.0	41.3 - 39.6	23.8 - 22.8	1071	1611	318	241	350	231.1
SB 45-6	22.0	30	71.3 - 67.5	41.2 - 39.0	41.3 - 39.6	23.8 - 22.8	1071	1611	318	241	350	231.1
SB 45-7-2	30.0	40	-----	-----	55.4 - 50.7	31.9 - 29.2	1151	1811	390	295	400	359.5
SB 45-7	30.0	40	-----	-----	55.4 - 50.7	31.9 - 29.2	1151	1811	390	295	400	359.5
SB 45-8-2	30.0	40	-----	-----	55.4 - 50.7	31.9 - 29.2	1231	1891	390	295	400	343.2
SB 45-8	30.0	40	-----	-----	55.4 - 50.7	31.9 - 29.2	1231	1891	390	295	400	343.2
SB 45-9-2	30.0	40	-----	-----	55.4 - 50.7	31.9 - 29.2	1311	1971	390	295	400	347.0
SB 45-9	37.0	50	-----	-----	67.7 - 62.0	39.0 - 35.7	1311	1971	390	295	400	365.0
SB 45-10-2	37.0	50	-----	-----	67.7 - 62.0	39.0 - 35.7	1391	2051	390	295	400	368.7
SB 45-10	37.0	50	-----	-----	67.7 - 62.0	39.0 - 35.7	1391	2051	390	295	400	368.7
SB 45-11-2	45.0	60	-----	-----	82.3 - 75.4	47.4 - 43.4	1471	2161	446	325	450	448.5
SB 45-11	45.0	60	-----	-----	82.3 - 75.4	47.4 - 43.4	1471	2161	446	325	450	448.5
SB 45-12-2	45.0	60	-----	-----	82.3 - 75.4	47.4 - 43.4	1551	2241	446	325	450	452.5
SB 45-12	45.0	60	-----	-----	82.3 - 75.4	47.4 - 43.4	1551	2241	446	325	450	452.5
SB 45-13-2	45.0	60	-----	-----	82.3 - 75.4	47.4 - 43.4	1631	2321	446	325	450	455.9

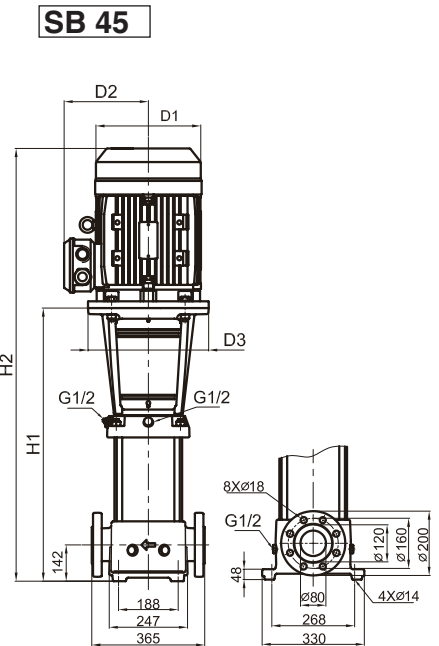

Flange(DIN)
PN16-25-40 / DN80

SBI ,SBN 45

50Hz Pump type	Motor		Nominal current [A]				Dimension[mm]					Net weight [kg] DIN flange
	P ₂		3φ		3φ		DIN flange		D1	D2	D3	
	[kW]	[HP]	△220-240V	Y380-415V	△380-415V	Y660-720V	H1	H2				
SBI(N) 45-1-1	3.0	4.0	11.8 - 12.3	6.8 - 7.1	6.8 - 6.9	3.9 - 4.0	559	875	197	147	280	84.2
SBI(N) 45-1	4.0	5.5	15.1 - 15.2	8.7 - 8.8	8.7 - 8.3	5.0 - 4.8	559	885	220	161	280	88.3
SBI(N) 45-2-2	5.5	7.5	18.7 - 18.0	10.8 - 10.4	10.9 - 10.8	6.3 - 6.2	639	1001	235	197	300	108.8
SBI(N) 45-2	7.5	10	25.5 - 24.9	14.7 - 14.4	14.9 - 14.8	8.6 - 8.5	639	1044	235	197	300	114.7
SBI(N) 45-3-2	11.0	15	38.8 - 39.1	22.4 - 22.6	22.9 - 23.8	13.2 - 13.7	829	1274	269	215	350	155.7
SBI(N) 45-3	11.0	15	38.8 - 39.1	22.4 - 22.6	22.9 - 23.8	13.2 - 13.7	829	1274	269	215	350	155.7
SBI(N) 45-4-2	15.0	20	49.3 - 46.5	28.5 - 26.9	24.9 - 29.0	16.9 - 16.7	909	1399	269	215	350	170.1
SBI(N) 45-4	15.0	20	49.3 - 46.5	28.5 - 26.9	24.9 - 29.0	16.9 - 16.7	909	1399	269	215	350	170.1
SBI(N) 45-5-2	18.5	25	60.2 - 55.4	34.8 - 32.0	35.2 - 33.5	20.3 - 19.3	989	1529	318	241	350	198.8
SBI(N) 45-5	18.5	25	60.2 - 55.4	34.8 - 32.0	35.2 - 33.5	20.3 - 19.3	989	1529	318	241	350	198.8
SBI(N) 45-6-2	22.0	30	71.3 - 67.5	41.2 - 39.0	41.3 - 39.6	23.8 - 22.8	1069	1609	318	241	350	223.3
SBI(N) 45-6	22.0	30	71.3 - 67.5	41.2 - 39.0	41.3 - 39.6	23.8 - 22.8	1069	1609	318	241	350	223.3
SBI(N) 45-7-2	30.0	40	-----	-----	55.4 - 50.7	31.9 - 29.2	1149	1809	390	295	400	330.7
SBI(N) 45-7	30.0	40	-----	-----	55.4 - 50.7	31.9 - 29.2	1149	1809	390	295	400	330.7
SBI(N) 45-8-2	30.0	40	-----	-----	55.4 - 50.7	31.9 - 29.2	1229	1889	390	295	400	334.5
SBI(N) 45-8	30.0	40	-----	-----	55.4 - 50.7	31.9 - 29.2	1229	1889	390	295	400	334.5
SBI(N) 45-9-2	30.0	40	-----	-----	55.4 - 50.7	31.9 - 29.2	1309	1969	390	295	400	338.2
SBI(N) 45-9	37.0	50	-----	-----	67.7 - 62.0	39.0 - 35.7	1309	1969	390	295	400	356.2
SBI(N) 45-10-2	37.0	50	-----	-----	67.7 - 62.0	39.0 - 35.7	1389	2049	390	295	400	359.9
SBI(N) 45-10	37.0	50	-----	-----	67.7 - 62.0	39.0 - 35.7	1389	2049	390	295	400	359.9
SBI(N) 45-11-2	45.0	60	-----	-----	82.3 - 75.4	47.4 - 43.4	1469	2159	446	325	450	439.7
SBI(N) 45-11	45.0	60	-----	-----	82.3 - 75.4	47.4 - 43.4	1469	2159	446	325	450	439.7
SBI(N) 45-12-2	45.0	60	-----	-----	82.3 - 75.4	47.4 - 43.4	1549	2239	446	325	450	443.4
SBI(N) 45-12	45.0	60	-----	-----	82.3 - 75.4	47.4 - 43.4	1549	2239	446	325	450	443.4
SBI(N) 45-13-2	45.0	60	-----	-----	82.3 - 75.4	47.4 - 43.4	1629	2319	446	325	450	447.1

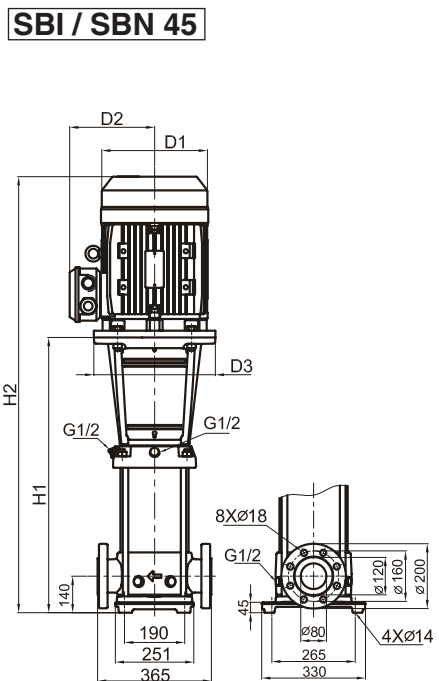

Flange(DIN)
PN16-25-40 / DN80

Performance Curves




Vertical Multistage Centrifugal In-line Pumps

SB(I/N) 64



STAIRS PUMPS

SB, SBI, SBN 64

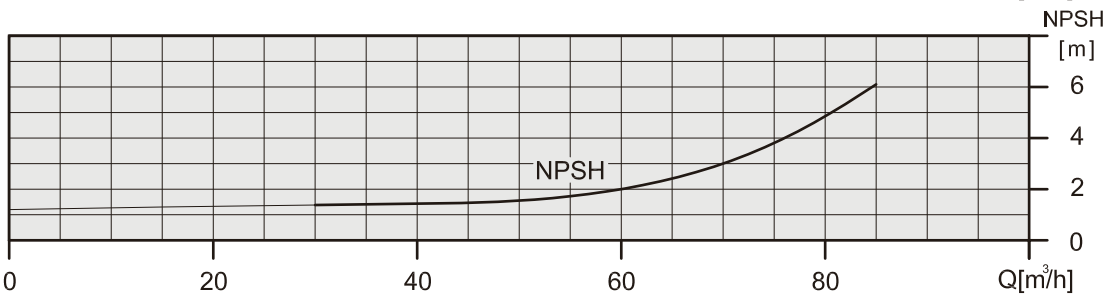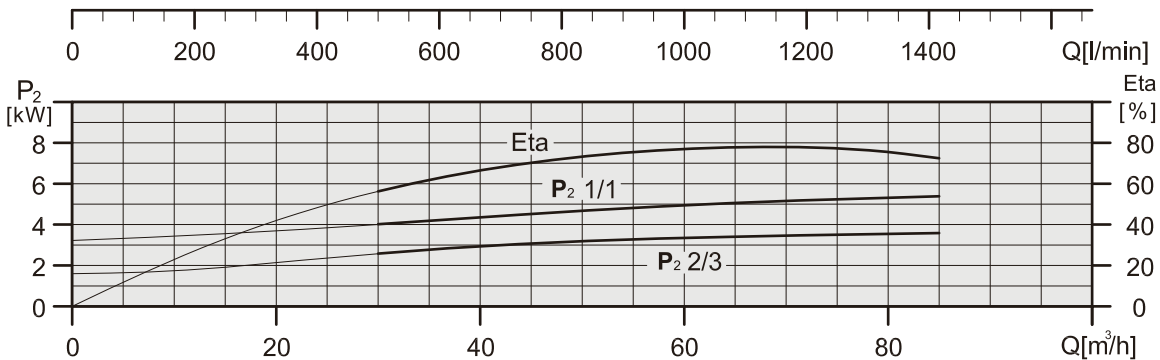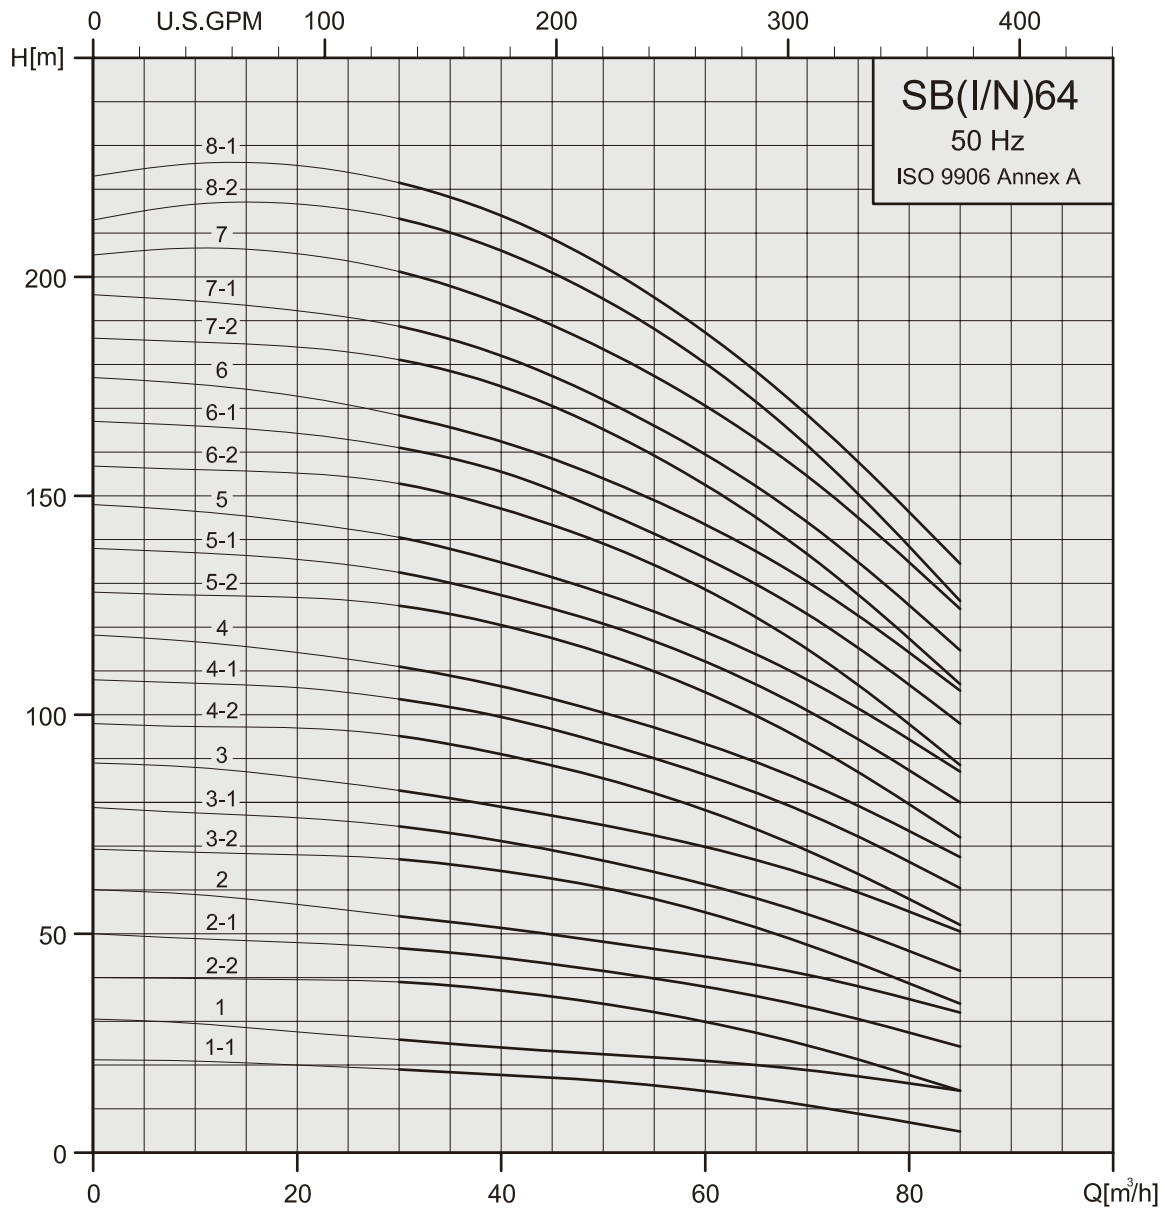

Technical data

Vertical Multistage Centrifugal In-line Pumps

SB(I/N) 64




STAIRS PUMPS

SB 64

50Hz Pump type	Motor P ₂		Nominal current [A]				Dimension[mm]					Net weight [kg]
	[kW]	[HP]	△220-240V	Y380-415V	△380-415V	Y660-720V	H1	H2	D1	D2	D3	
SB 64-1-1	4.0	5.5	15.1 - 15.2	8.7 - 8.8	8.7 - 8.3	5.0 - 4.8	563	889	220	161	280	90.9
SB 64-1	5.5	7.5	18.7 - 18.0	10.8 - 10.4	10.9 - 10.8	6.3 - 6.2	563	925	235	197	300	107.6
SB 64-2-2	7.5	10	25.5 - 24.9	14.7 - 14.4	14.9 - 14.8	8.6 - 8.5	646	1051	235	197	300	117.6
SB 64-2-1	11.0	15	38.8 - 39.1	22.4 - 22.6	22.9 - 23.8	13.2 - 13.7	756	1201	269	215	350	154.8
SB 64-2	11.0	15	38.8 - 39.1	22.4 - 22.6	22.9 - 23.8	13.2 - 13.7	756	1201	269	215	350	154.8
SB 64-3-2	15.0	20	49.3 - 46.5	28.5 - 26.9	24.9 - 29.0	16.9 - 16.7	838	1328	269	215	350	170.0
SB 64-3-1	15.0	20	49.3 - 46.5	28.5 - 26.9	24.9 - 29.0	16.9 - 16.7	838	1328	269	215	350	170.0
SB 64-3	18.5	25	60.2 - 55.4	34.8 - 32.0	35.2 - 33.5	20.3 - 19.3	838	1378	318	241	350	202.9
SB 64-4-2	18.5	25	60.2 - 55.4	34.8 - 32.0	35.2 - 33.5	20.3 - 19.3	921	1461	318	241	350	206.9
SB 64-4-1	22.0	30	71.3 - 67.5	41.2 - 39.0	41.3 - 39.6	23.8 - 22.8	921	1461	318	241	350	219.7
SB 64-4	22.0	30	71.3 - 67.5	41.2 - 39.0	41.3 - 39.6	23.8 - 22.8	921	1461	318	241	350	219.7
SB 64-5-2	30.0	40	-----	-----	55.4 - 50.7	31.9 - 29.2	1003	1663	390	295	400	327.3
SB 64-5-1	30.0	40	-----	-----	55.4 - 50.7	31.9 - 29.2	1003	1663	390	295	400	327.3
SB 64-5	30.0	40	-----	-----	55.4 - 50.7	31.9 - 29.2	1003	1663	390	295	400	327.3
SB 64-6-2	30.0	40	-----	-----	55.4 - 50.7	31.9 - 29.2	1086	1746	390	295	400	331.2
SB 64-6-1	37.0	50	-----	-----	67.7 - 62.0	39.0 - 35.7	1086	1746	390	295	400	349.2
SB 64-6	37.0	50	-----	-----	67.7 - 62.0	39.0 - 35.7	1086	1746	390	295	400	349.2
SB 64-7-2	37.0	50	-----	-----	67.7 - 62.0	39.0 - 35.7	1168	1828	390	295	400	353.3
SB 64-7-1	37.0	50	-----	-----	67.7 - 62.0	39.0 - 35.7	1168	1828	390	295	400	353.3
SB 64-7	45.0	60	-----	-----	82.3 - 75.4	47.4 - 43.4	1172	1862	446	325	450	429.4
SB 64-8-2	45.0	60	-----	-----	82.3 - 75.4	47.4 - 43.4	1255	1945	446	325	450	433.5
SB 64-8-1	45.0	60	-----	-----	82.3 - 75.4	47.4 - 43.4	1255	1945	446	325	450	433.5

SB 64

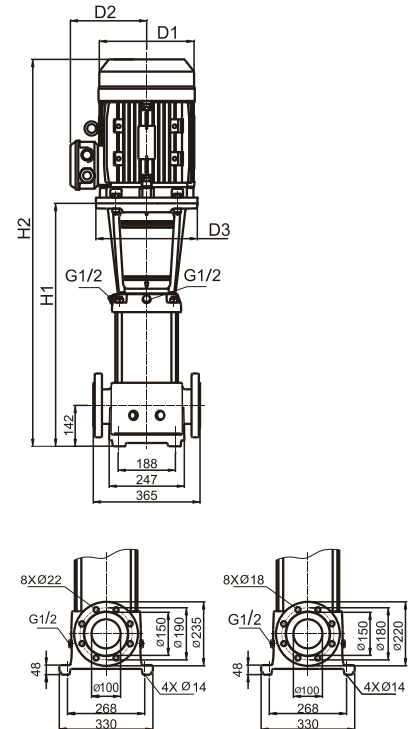


Flange(DIN)
PN25-40 / DN100

Flange(DIN)
PN16 / DN100

SBI ,SBN 64

50Hz Pump type	Motor P ₂		Nominal current [A]				Dimension[mm]					Net weight [kg]
	[kW]	[HP]	△220-240V	Y380-415V	△380-415V	Y660-720V	H1	H2	D1	D2	D3	
SBI(N) 64-1-1	4.0	5.5	15.1 - 15.2	8.7 - 8.8	8.7 - 8.3	5.0 - 4.8	563	889	220	161	280	83.8
SBI(N) 64-1	5.5	7.5	18.7 - 18.0	10.8 - 10.4	10.9 - 10.8	6.3 - 6.2	563	925	235	197	300	100.6
SBI(N) 64-2-2	7.5	10	25.5 - 24.9	14.7 - 14.4	14.9 - 14.8	8.6 - 8.5	646	1051	235	197	300	110.6
SBI(N) 64-2-1	11.0	15	38.8 - 39.1	22.4 - 22.6	22.9 - 23.8	13.2 - 13.7	756	1201	269	215	350	147.8
SBI(N) 64-2	11.0	15	38.8 - 39.1	22.4 - 22.6	22.9 - 23.8	13.2 - 13.7	756	1201	269	215	350	147.8
SBI(N) 64-3-2	15.0	20	49.3 - 46.5	28.5 - 26.9	24.9 - 29.0	16.9 - 16.7	838	1328	269	215	350	162.5
SBI(N) 64-3-1	15.0	20	49.3 - 46.5	28.5 - 26.9	24.9 - 29.0	16.9 - 16.7	838	1328	269	215	350	162.5
SBI(N) 64-3	18.5	25	60.2 - 55.4	34.8 - 32.0	35.2 - 33.5	20.3 - 19.3	838	1378	318	241	350	195.4
SBI(N) 64-4-2	18.5	25	60.2 - 55.4	34.8 - 32.0	35.2 - 33.5	20.3 - 19.3	921	1461	318	241	350	199.4
SBI(N) 64-4-1	22.0	30	71.3 - 67.5	41.2 - 39.0	41.3 - 39.6	23.8 - 22.8	921	1461	318	241	350	212.4
SBI(N) 64-4	22.0	30	71.3 - 67.5	41.2 - 39.0	41.3 - 39.6	23.8 - 22.8	921	1461	318	241	350	212.4
SBI(N) 64-5-2	30.0	40	-----	-----	55.4 - 50.7	31.9 - 29.2	1003	1663	390	295	400	319.7
SBI(N) 64-5-1	30.0	40	-----	-----	55.4 - 50.7	31.9 - 29.2	1003	1663	390	295	400	319.7
SBI(N) 64-5	30.0	40	-----	-----	55.4 - 50.7	31.9 - 29.2	1003	1663	390	295	400	319.7
SBI(N) 64-6-2	30.0	40	-----	-----	55.4 - 50.7	31.9 - 29.2	1086	1746	390	295	400	323.7
SBI(N) 64-6-1	37.0	50	-----	-----	67.7 - 62.0	39.0 - 35.7	1086	1746	390	295	400	341.7
SBI(N) 64-6	37.0	50	-----	-----	67.7 - 62.0	39.0 - 35.7	1086	1746	390	295	400	341.7
SBI(N) 64-7-2	37.0	50	-----	-----	67.7 - 62.0	39.0 - 35.7	1168	1828	390	295	400	345.7
SBI(N) 64-7-1	37.0	50	-----	-----	67.7 - 62.0	39.0 - 35.7	1168	1828	390	295	400	345.7
SBI(N) 64-7	45.0	60	-----	-----	82.3 - 75.4	47.4 - 43.4	1172	1862	446	325	450	421.8
SBI(N) 64-8-2	45.0	60	-----	-----	82.3 - 75.4	47.4 - 43.4	1255	1945	446	325	450	426.0
SBI(N) 64-8-1	45.0	60	-----	-----	82.3 - 75.4	47.4 - 43.4	1255	1945	446	325	450	426.0

SBI / SBN 64

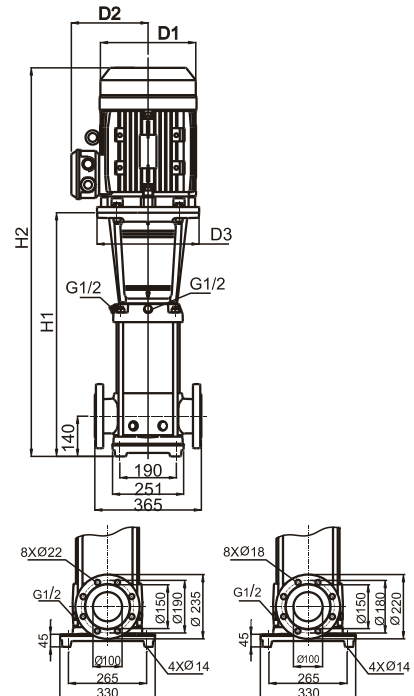

Flange(DIN)
PN25-40 / DN100

Flange(DIN)
PN16 / DN100

Performance Curves





Vertical Multistage Centrifugal In-line Pumps

SB(I/N) 90




STAIRS PUMPS

SB, SBI, SBN 90

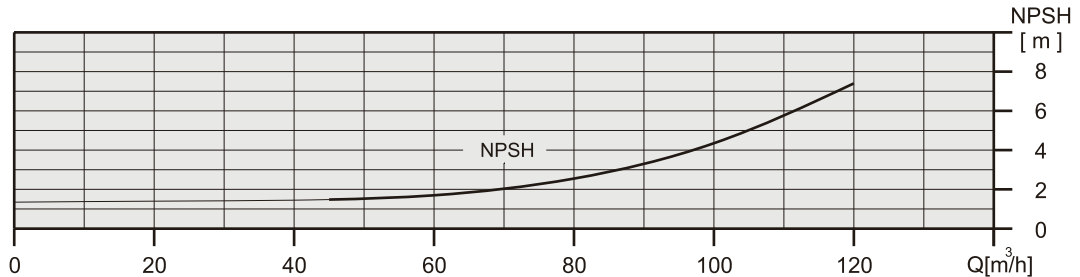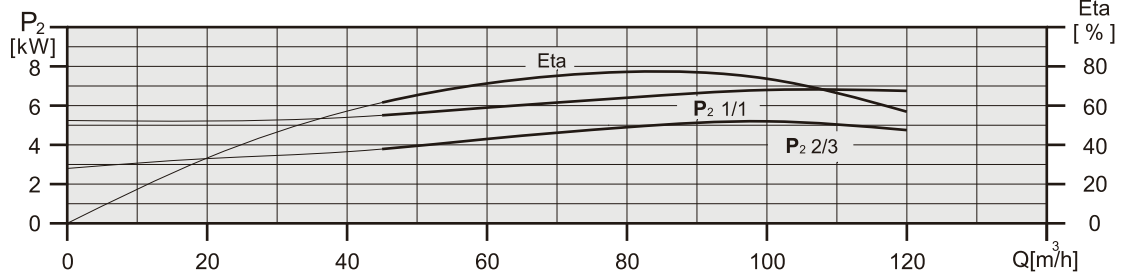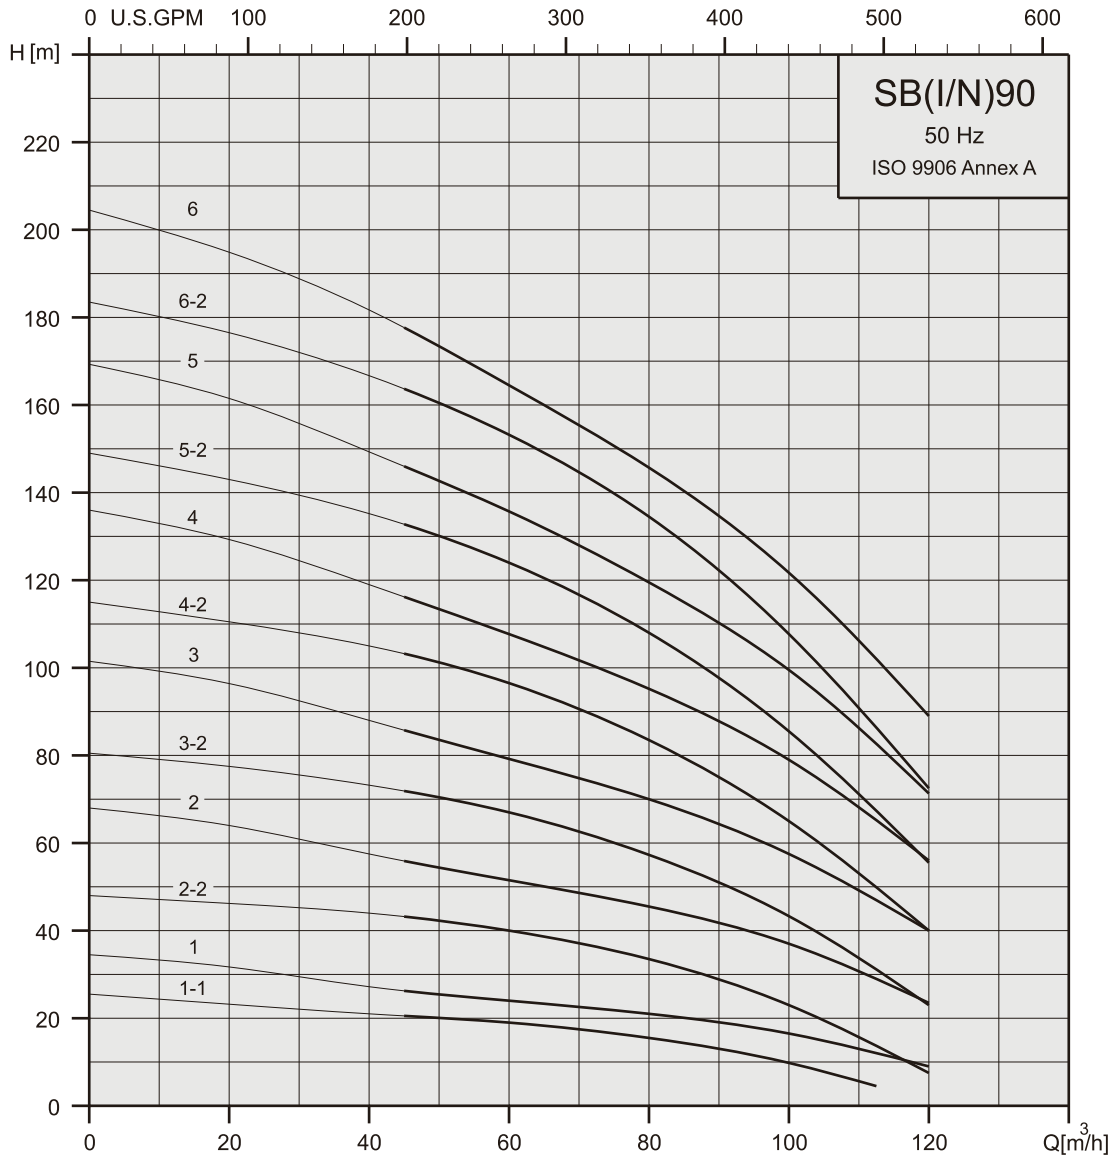




SB 90

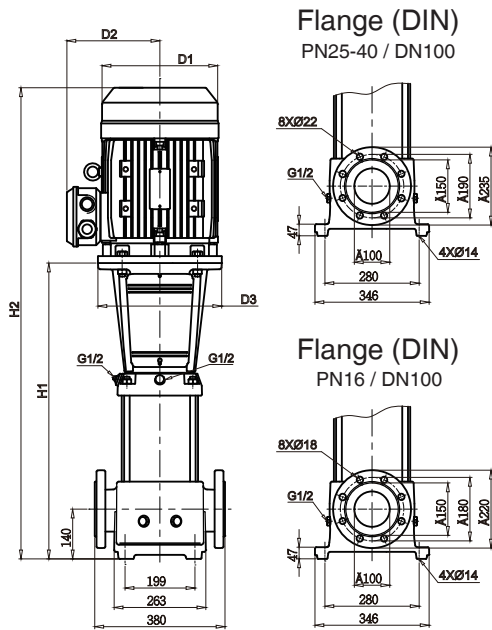

SBI / SBN 90

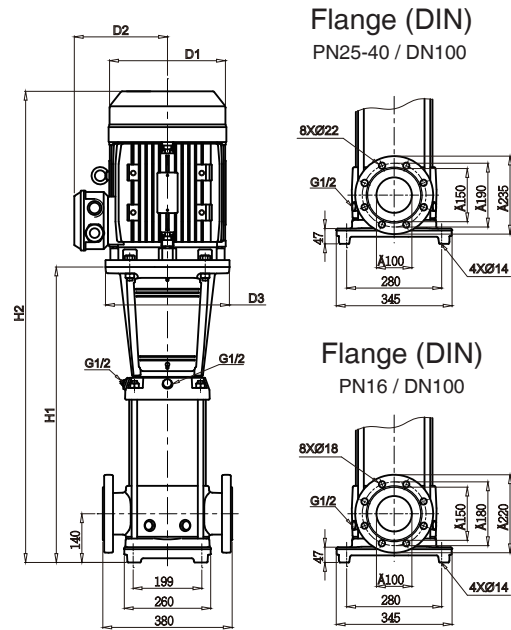

SB 90

50Hz	Motor		Nominal current [A]				Dimension[mm]					Net weight [kg]
	P ₂		3∅		3∅		DIN flange		D1	D2	D3	
Pump type	[kW]	[HP]	△220-240V	Y380-415V	△380-415V	Y660-720V	H1	H2				
SB 90-1-1	5.5	7.5	18.7 - 18.0	10.8 - 10.4	10.9 - 10.8	6.3 - 6.2	572	934	235	197	300	115.0
SB 90-1	7.5	10	25.5 - 24.9	14.7 - 14.4	14.9 - 14.8	8.6 - 8.5	572	977	235	197	300	120.9
SB 90-2-2	11.0	15	38.8 - 39.1	22.4 - 22.6	22.9 - 23.8	13.2 - 13.7	774	1219	269	215	350	163.5
SB 90-2	15.0	20	49.3 - 46.5	28.5 - 26.9	24.9 - 29.0	16.9 - 16.7	774	1264	269	215	350	174.1
SB 90-3-2	18.5	20	49.3 - 46.5	28.5 - 26.9	24.9 - 29.0	16.9 - 16.7	866	1406	318	241	350	212.2
SB 90-3	22.0	25	60.2 - 55.4	34.8 - 32.0	35.2 - 33.5	20.3 - 19.3	866	1406	318	241	350	225.0
SB 90-4-2	30.0	40	-----	-----	55.4 - 50.7	31.9 - 29.2	958	1618	390	295	400	333.9
SB 90-4	30.0	40	-----	-----	55.4 - 50.7	31.9 - 29.2	958	1618	390	295	400	333.9
SB 90-5-2	37.0	50	-----	-----	67.7 - 62.0	39.0 - 35.7	1050	1710	390	295	400	356.6
SB 90-5	37.0	50	-----	-----	67.7 - 62.0	39.0 - 35.7	1050	1710	390	295	400	356.6
SB 90-6-2	45.0	60	-----	-----	82.3 - 75.4	47.4 - 43.4	1142	1832	446	325	450	437.9
SB 90-6	45.0	60	-----	-----	82.3 - 75.4	47.4 - 43.4	1142	1832	446	325	450	437.9

SBI ,SBN 90

50Hz	Motor		Nominal current [A]				Dimension[mm]					Net weight [kg]
	P ₂		3∅		3∅		DIN flange		D1	D2	D3	
Pump type	[kW]	[HP]	△220-240V	Y380-415V	△380-415V	Y660-720V	H1	H2				
SBI(N) 90-1-1	5.5	7.5	18.7 - 18.0	10.8 - 10.4	10.9 - 10.8	6.3 - 6.2	576	938	235	197	300	111.4
SBI(N) 90-1	7.5	10	25.5 - 24.9	14.7 - 14.4	14.9 - 14.8	8.6 - 8.5	576	981	235	197	300	117.3
SBI(N) 90-2-2	11.0	15	38.8 - 39.1	22.4 - 22.6	22.9 - 23.8	13.2 - 13.7	778	1223	269	215	350	159.7
SBI(N) 90-2	15.0	20	49.3 - 46.5	28.5 - 26.9	24.9 - 29.0	16.9 - 16.7	778	1268	269	215	350	170.3
SBI(N) 90-3-2	18.5	20	49.3 - 46.5	28.5 - 26.9	24.9 - 29.0	16.9 - 16.7	870	1410	318	241	350	208.4
SBI(N) 90-3	22.0	25	60.2 - 55.4	34.8 - 32.0	35.2 - 33.5	20.3 - 19.3	870	1410	318	241	350	221.2
SBI(N) 90-4-2	30.0	40	-----	-----	55.4 - 50.7	31.9 - 29.2	962	1622	390	295	400	329.9
SBI(N) 90-4	30.0	40	-----	-----	55.4 - 50.7	31.9 - 29.2	962	1622	390	295	400	329.9
SBI(N) 90-5-2	37.0	50	-----	-----	67.7 - 62.0	39.0 - 35.7	1054	1714	390	295	400	355.0
SBI(N) 90-5	37.0	50	-----	-----	67.7 - 62.0	39.0 - 35.7	1054	1714	390	295	400	355.0
SBI(N) 90-6-2	45.0	60	-----	-----	82.3 - 75.4	47.4 - 43.4	1146	1836	446	325	450	436.1
SBI(N) 90-6	45.0	60	-----	-----	82.3 - 75.4	47.4 - 43.4	1146	1836	446	325	450	436.1

Performance Curves


SB(I/N) 120

Vertical Multistage Centrifugal In-line Pumps



STAIRS PUMPS

SB, SBI, SBN 120

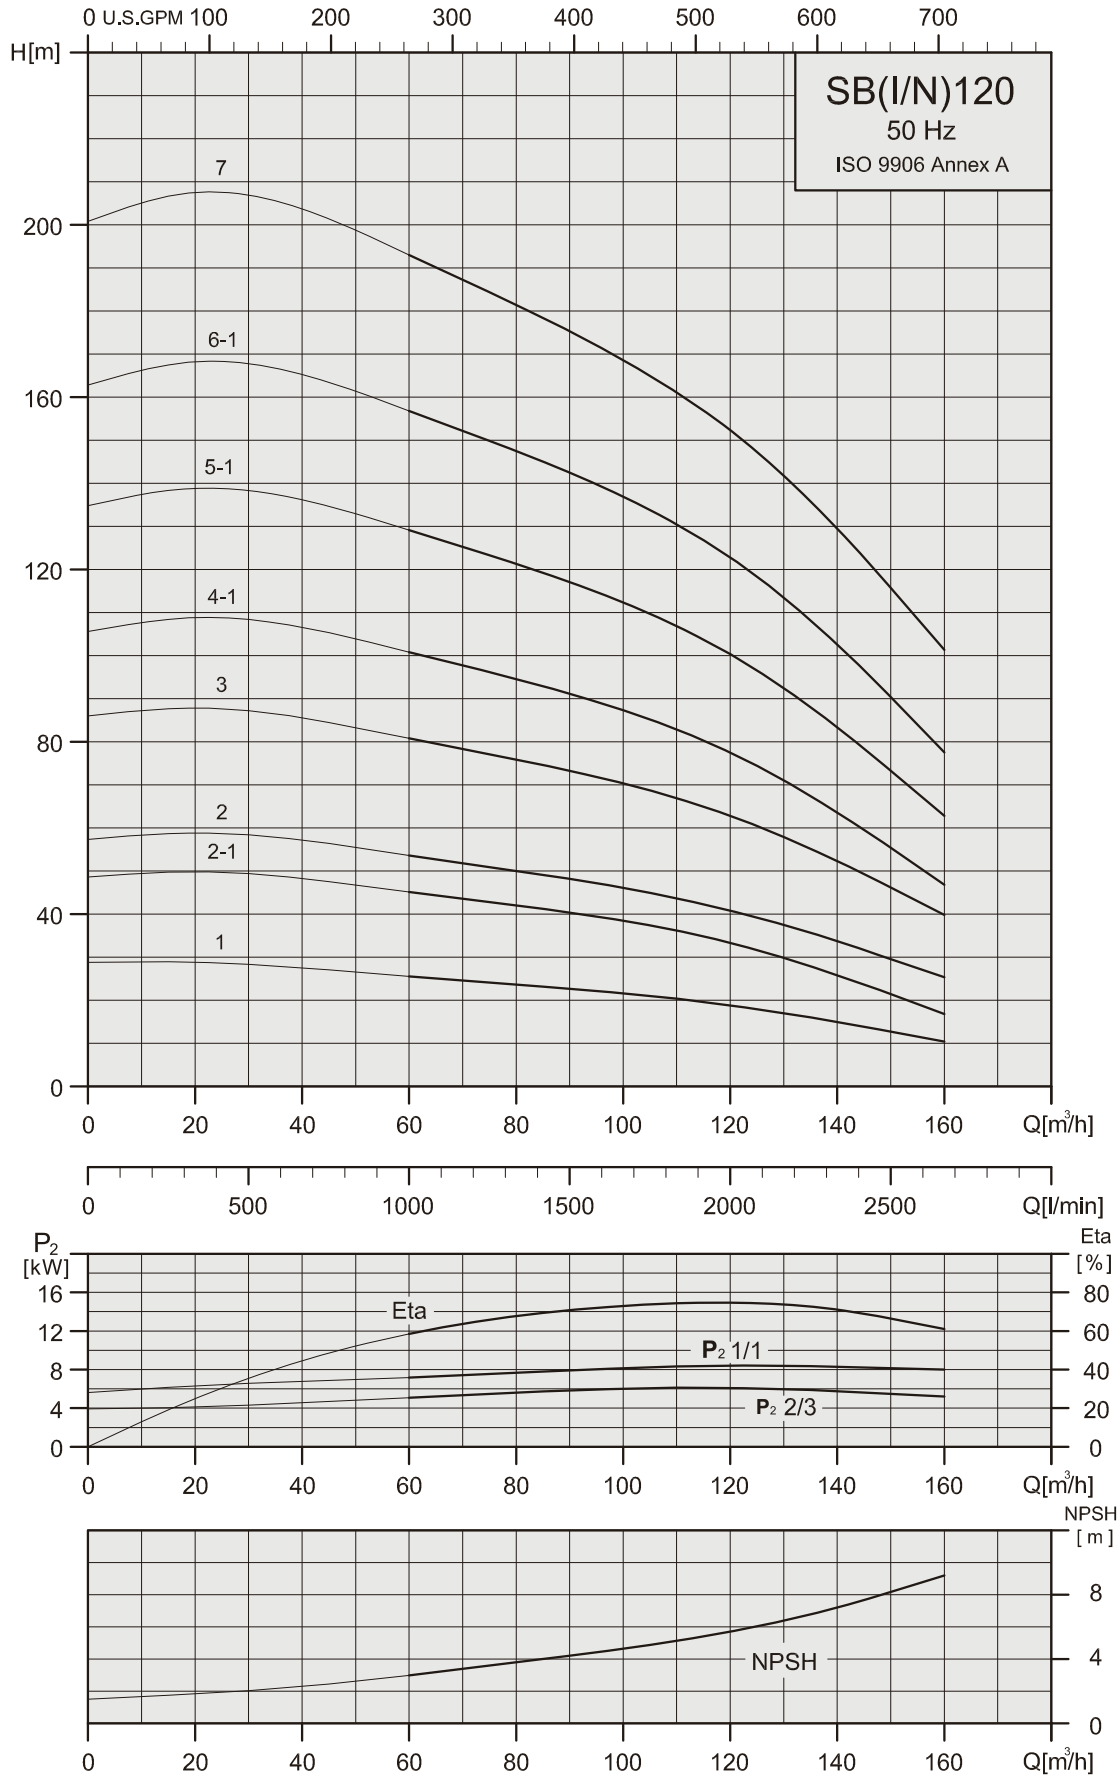

Technical data


Vertical Multistage Centrifugal In-line Pumps

SB(I/N) 120




STAIRS PUMPS


SB 120

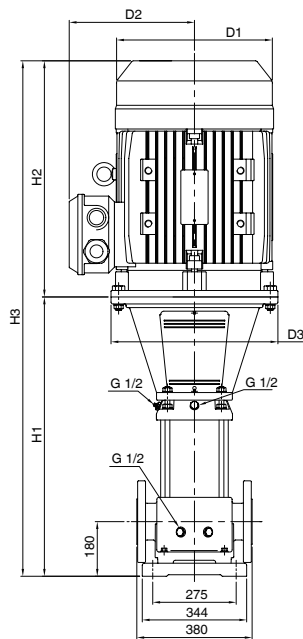


Flange(DIN)
PN25-40 / DN125



SBI / SBN 120

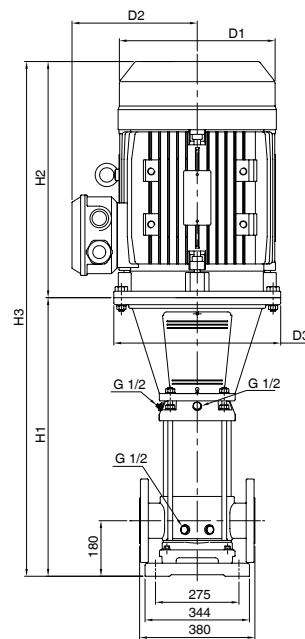

Flange(DIN)
PN25-40 / DN125



SB 120

50Hz	Motor		Nominal current [A]				Dimension[mm]						Net weight [kg]
	P ₂		3ø		3ø		DIN flange			D1	D2	D3	
Pump type	[kW]	[HP]	△220-240V	Y380-415V	△380-415V	Y660-720V	H1	H2	H3	D1	D2	D3	DIN flange
SB 120-1	11	15	38.8 - 39.1	22.4 - 22.6	22.9 - 23.8	13.2 - 13.7	834	445	1279	269	215	350	195.6
SB 120-2-1	18.5	25	60.2 - 55.4	34.8 - 32.0	35.2 - 33.5	20.3 - 19.3	990	540	1530	318	241	350	249.1
SB 120-2	22	30	71.3 - 67.5	41.2 - 39.0	41.3 - 39.6	23.8 - 22.8	990	540	1530	318	241	350	265.8
SB 120-3	30	40	-----	-----	55.4 - 50.7	31.9 - 29.2	1145	660	1805	390	295	400	375.5
SB 120-4-1	37	50	-----	-----	67.7 - 62.0	39.0 - 35.7	1301	660	1961	390	295	400	403.5
SB 120-5-1	45	60	-----	-----	82.3 - 75.4	47.4 - 43.4	1460	690	2150	446	325	450	489.6
SB 120-6-1	55	75	-----	-----	101 - 92.5	58.2 - 53.3	1642	770	2412	485	355	550	619.8
SB 120-7	75	100	-----	-----	134 - 123	77.2 - 70.7	1797	845	2642	550	410	550	746.4

SBI ,SBN 120

50Hz	Motor		Nominal current [A]				Dimension[mm]						Net weight [kg]
	P ₂		3ø		3ø		DIN flange			D1	D2	D3	
Pump type	[kW]	[HP]	△220-240V	Y380-415V	△380-415V	Y660-720V	H1	H2	H3	D1	D2	D3	DIN flange
SBI(N) 120-1	11	15	38.8 - 39.1	22.4 - 22.6	22.9 - 23.8	13.2 - 13.7	837	445	1282	329	215	350	179.8
SBI(N) 120-2-1	18.5	25	60.2 - 55.4	34.8 - 32.0	35.2 - 33.5	20.3 - 19.3	993	540	1533	318	241	350	233.5
SBI(N) 120-2	22	30	71.3 - 67.5	41.2 - 39.0	41.3 - 39.6	23.8 - 22.8	993	540	1533	318	241	350	250.1
SBI(N) 120-3	30	40	-----	-----	55.4 - 50.7	31.9 - 29.2	1149	660	1809	390	295	400	359.9
SBI(N) 120-4-1	37	50	-----	-----	67.7 - 62.0	39.0 - 35.7	1304	660	1964	390	295	400	388.1
SBI(N) 120-5-1	45	60	-----	-----	82.3 - 75.4	47.4 - 43.4	1463	690	2153	446	325	450	474.3
SBI(N) 120-6-1	55	75	-----	-----	101 - 92.5	58.2 - 53.3	1645	770	2415	485	355	550	604.8
SBI(N) 120-7	75	100	-----	-----	134 - 123	77.2 - 70.7	1800	845	2645	550	410	550	731.5

Performance Curves


SB(I/N) 150

Vertical Multistage Centrifugal In-line Pumps



STAIRS PUMPS

SB, SBI, SBN 150

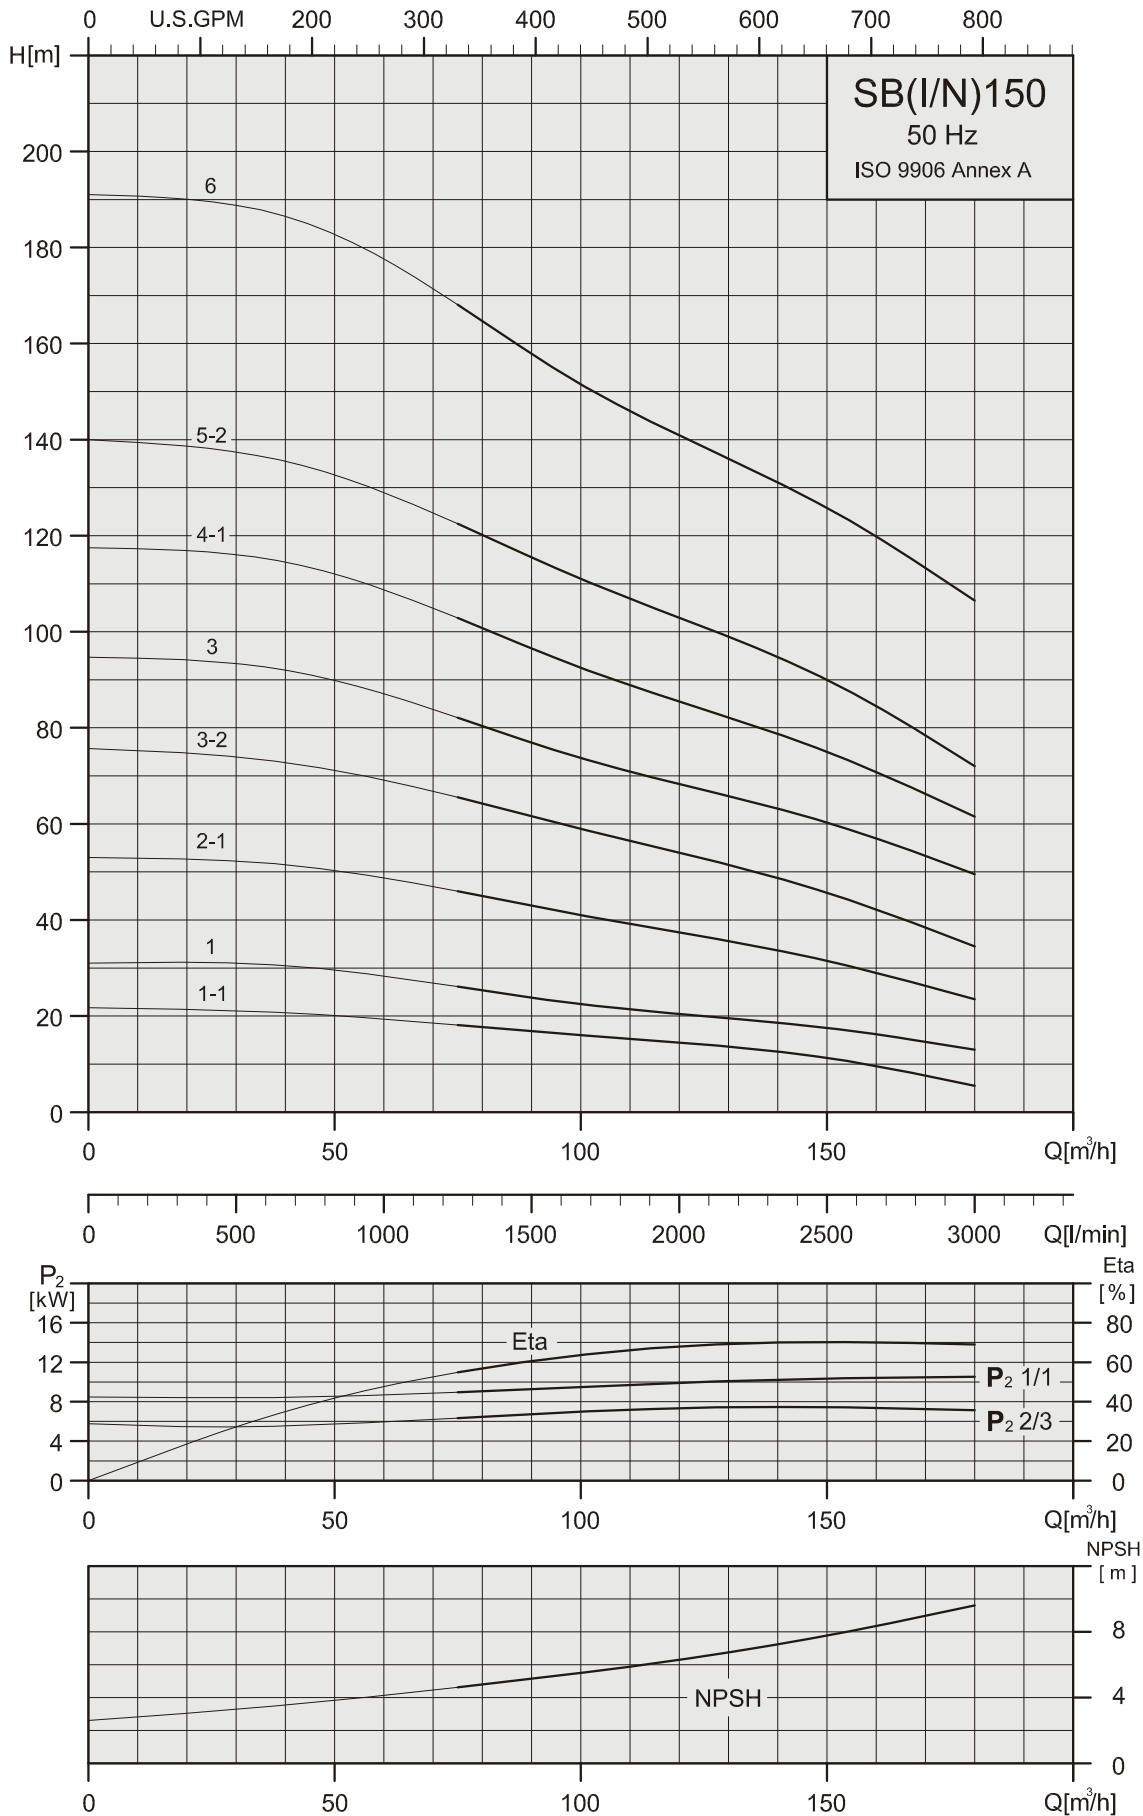


Technical data

Vertical Multistage Centrifugal In-line Pumps

SB(I/N) 150



STAIRS PUMPS

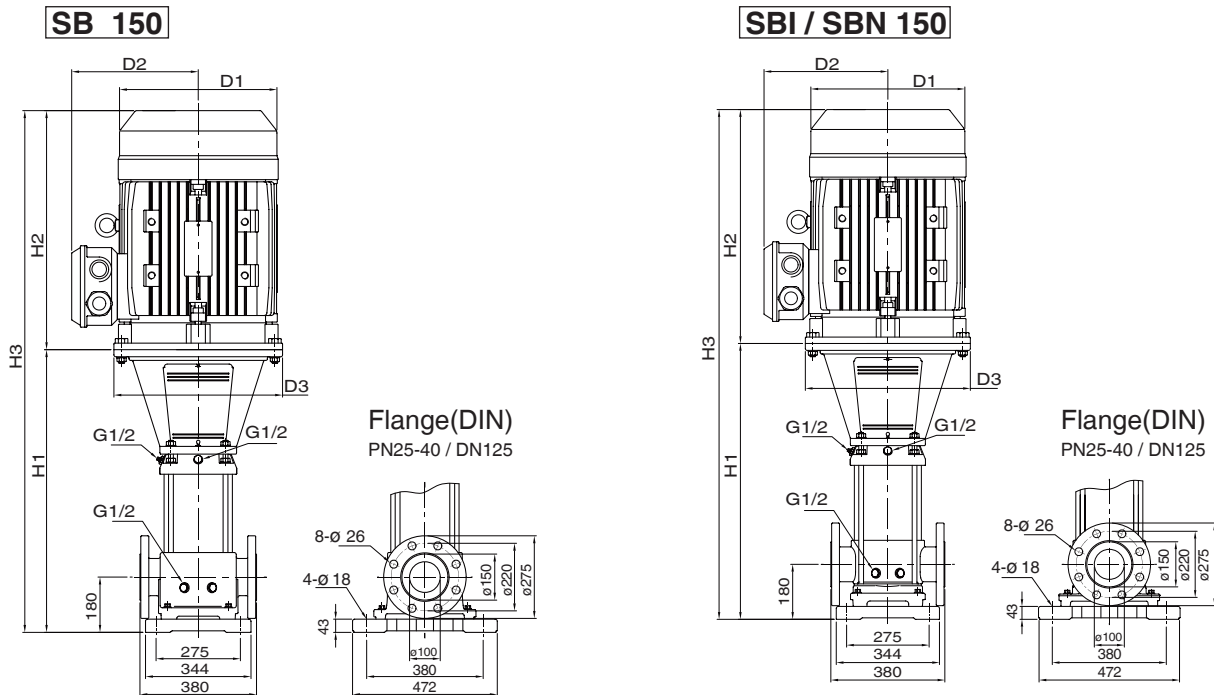

SB 150

50Hz	Motor		Nominal current [A]				Dimension[mm]						Net weight [kg]
	P ₂		3ø		3ø		DIN flange			D1	D2	D3	
Pump type	[kW]	[HP]	△220-240V	Y380-415V	△380-415V	Y660-720V	H1	H2	H3	D1	D2	D3	DIN flange
SB 150-1-1	11	15	38.8 - 39.1	22.4 - 22.6	22.9 - 23.8	13.2 - 13.7	834	445	1279	269	215	350	195.5
SB 150-1	18.5	25	60.2 - 55.4	34.8 - 32.0	35.2 - 33.5	20.3 - 19.3	834	490	1324	269	215	350	206.1
SB 150-2-1	22	30	71.3 - 67.5	41.2 - 39.0	41.3 - 39.6	23.8 - 22.8	990	540	1530	318	241	350	261.8
SB 150-3-2	30	40	-----	-----	55.4 - 50.7	31.9 - 29.2	1145	660	1805	390	295	400	375.3
SB 150-3	37	50	-----	-----	67.7 - 62.0	39.0 - 35.7	1145	660	1805	390	295	400	393.4
SB 150-4-1	45	60	-----	-----	82.3 - 75.4	47.4 - 43.4	1305	690	1995	446	325	450	479.4
SB 150-5-2	55	75	-----	-----	101 - 92.5	58.2 - 53.3	1486	770	2256	485	355	550	609.7
SB 150-6	75	100	-----	-----	134 - 123	77.2 - 70.7	1642	845	2487	550	410	550	736.0

SBI ,SBN 150

50Hz	Motor		Nominal current [A]				Dimension[mm]						Net weight [kg]
	P ₂		3ø		3ø		DIN flange			D1	D2	D3	
Pump type	[kW]	[HP]	△220-240V	Y380-415V	△380-415V	Y660-720V	H1	H2	H3	D1	D2	D3	DIN flange
SBI(N) 150-1-1	11	15	38.8 - 39.1	22.4 - 22.6	22.9 - 23.8	13.2 - 13.7	837	445	1282	269	215	350	168.9
SBI(N) 150-1	18.5	25	60.2 - 55.4	34.8 - 32.0	35.2 - 33.5	20.3 - 19.3	837	490	1327	269	215	350	179.5
SBI(N) 150-2-1	22	30	71.3 - 67.5	41.2 - 39.0	41.3 - 39.6	23.8 - 22.8	993	540	1533	318	241	350	145.6
SBI(N) 150-3-2	30	40	-----	-----	55.4 - 50.7	31.9 - 29.2	1148	660	1808	390	295	400	359.2
SBI(N) 150-3	37	50	-----	-----	67.7 - 62.0	39.0 - 35.7	1148	660	1808	390	295	400	377.2
SBI(N) 150-4-1	45	60	-----	-----	82.3 - 75.4	47.4 - 43.4	1308	690	1998	446	325	450	463.4
SBI(N) 150-5-2	55	75	-----	-----	101 - 92.5	58.2 - 53.3	1489	770	2259	485	355	550	595.8
SBI(N) 150-6	75	100	-----	-----	134 - 123	77.2 - 70.7	1645	845	2490	550	410	550	720.5



STAIRS INDUSTRIAL CO., LTD.

Company
No. 3-8, Sanchial Tsun, Lutsao Hsiang,
Chiai Hsien, Taiwan
Tel:+886(0)53750488
Fax:+886(0)53752330
E-Mail:stairs@stairs.com.tw