

Domestic hot water pumps

WITA UPH 15® | UPH 20-KS



Product specials

- Warranty
- Anti-block function
- 2,5 – 8,0 W power consumption
- UPH 20-KS Ball valve
- Non return valve




Technical Data

Max. pump lift	1.0 m 0.9 m
Max. flow rate	700 l/h 650 l/h
Power consumption	2,5 – 8,0 W
Control	3 constant characteristics, anti-block function
Supply voltage	1 x 230V, 50 Hz
Motor protection	No external motor protection required
Ip rating	IP 42
Ambient temperature	0 °C to +40 °C
Media temperature	+5 °C to 65 °C
Max. system pressure	10 bar
Connection size	DN 15, DN 20
Pump housing material	Brass
Special equipment	
UPH 20-KS	Ball valve Non return valve

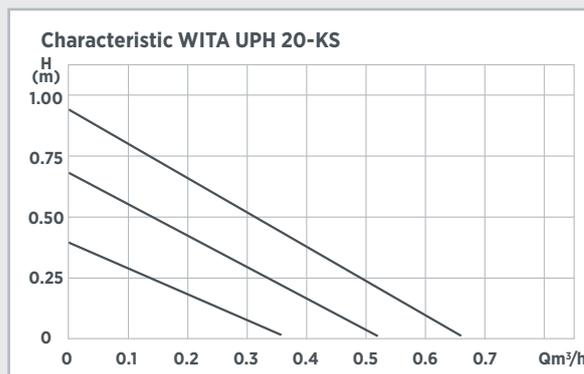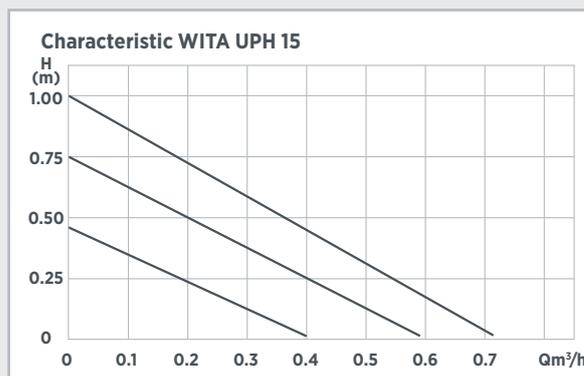

WITA UPH 20-KS



WITA UPH 15

