



Kiekis	Apašymas
1	<p>SBA 3-45 AW</p>  <p style="text-align: center;">Atkreipkite dėmesį! Paveikslėlyje parodytas produktas gali skirtis nuo tikrojo</p> <p>Produkto Nr.: 97896312</p> <p>Grundfos SBA 3-45 AW is an all-in-one submersible booster designed for pumping clean water for domestic use. The SBA is built on the proven SB platform and comes with an integrated control unit. This eliminates the need for an external pump controller in the house. It is silent when submerged and therefore a noiseless alternative to surface-mounted pumps. The pump is built from high quality composite and stainless steel materials that are resistant to corrosion.</p> <p>The SBA 3-45 AW is equipped with a 15 m supply cable, and the maximum installation depth is 10 m below the water level, with a liquid temperature ranging from 0 °C to 40 °C.</p> <p>The pump starts automatically when the pipe pressure falls below 2.2 bar.</p> <p>The SBA 3-45 AW is ideal for operation in a well or ground tanks, as it easily prevents solid particles from entering the pump. The maximum particle size is 1 mm.</p> <p>The pump features a float switch, which promises the user a convenient experience with automatic start/stop operation of the pump and provides dry running protection.</p> <p>The pump is equipped with a side inlet/flexible hose with floating suction strainer.</p> <p>The single-phase model is effectively protected against any accidental overload by built-in thermal protection.</p> <p>The pump has built-in thermal protection, which immediately stops the pump if it overheats. Having cooled down, the pump automatically restarts when it reaches a normal temperature.</p> <p>Skystis: Siurbiamas skystis: Vanduo Skysčio temperatūros diapazonas: 0 .. 40 °C Skysčio temperatūra ekspluatavimo metu: 20 °C Tankis: 998.2 kg/m³</p> <p>Techniniai duomenys: Nominalus debitasis: 2.83 m³/h Nominalus slėgio aukštis: 30.1 m Maks. dalelių dydis: 1 mm Kreivės tikslumas: ISO9906:2012 3B Return valve: YES Start pressure: 2.4 bar Nominalios pavaro apsukos: 2800 rpm</p> <p>Medžiagos: Siurblis korpusas: Kompozitas Darbaratis: Kompozitas</p> <p>Rengimas: Aplinkos temperatūros intervalas: -10 .. 50 °C</p>

Kiekis	Aprašymas
	<p>vado jungties tipas: FLOW STRAINER Siurblio išvadas: G 1" Maksimalus panardinimo gylis: 10 m</p> <p>Elektrotechniniai duomenys:</p> <p>Izoliacija: F Naudojama galia P1: 1.05 kW P2: 0.62 kW Elektros tinklo dažnis: 50 Hz Nominali tampa: 1 x 220-240 V Paleidimo srov : 12 A Cos fi: 0.94 Darbinis kondensatorius: 13 µF/450 V Korpuso klas (IEC 34-5): IP68 Kabelio ilgis: 15 m Kabelio tipas: H07RN-F 3G1 Kabelio kištuko tipas: SCHUKO Nominali srov : 4.8 A</p> <p>Kita:</p> <p>Neto mas : 9.83 kg Bruto mas : 10.6 kg Tiektimo t r̃is: 0.031 m³ Danijos VVS Nr.: 391368045 Švedijos RSK Nr.: 5850423 Suomi : 4822548 Norvegijos NRF Nr.: 9041858 Sertifikatai: CE,VDE,WEEE</p>

97896312 SBA 3-45 AW 50 Hz

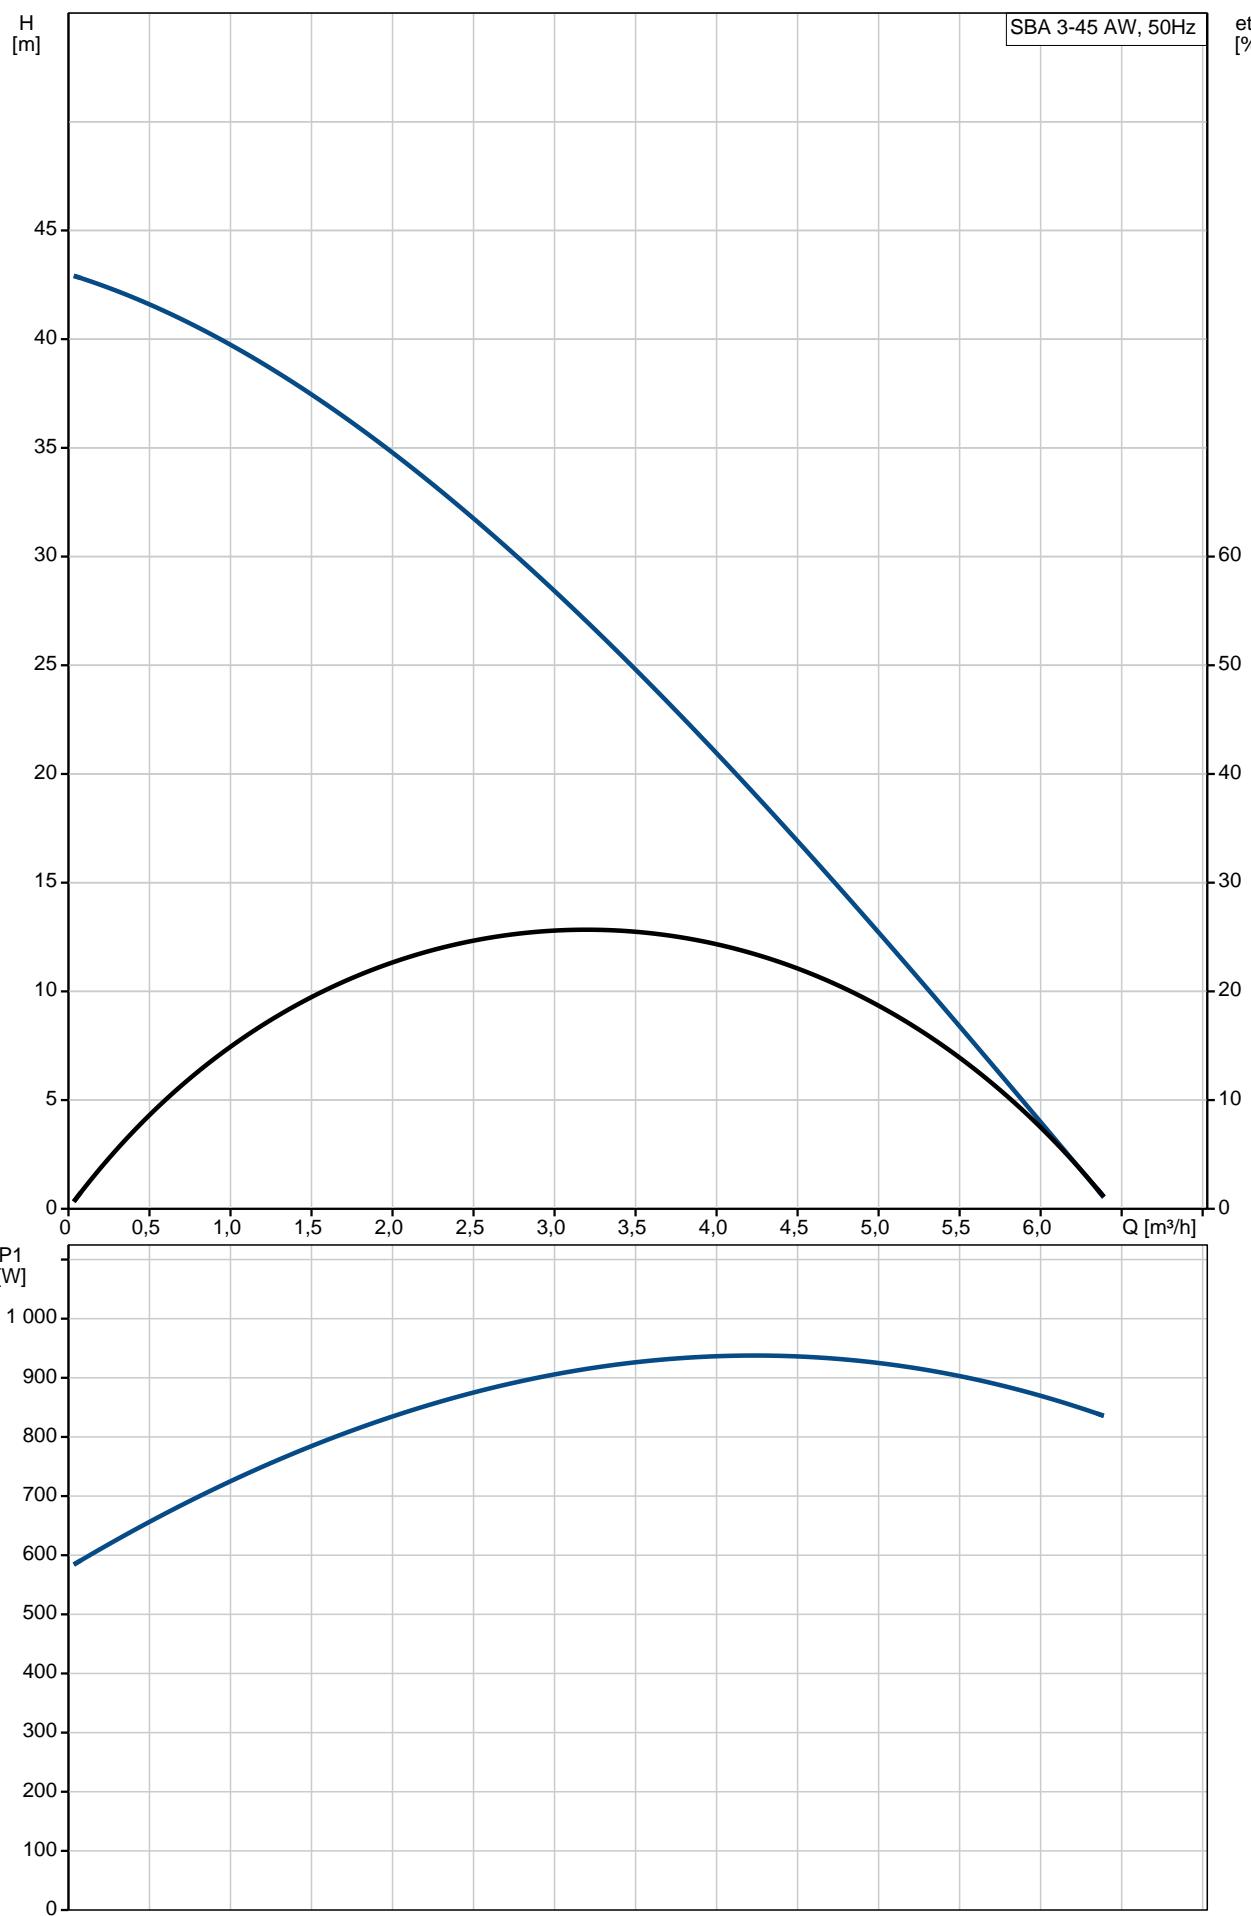

97896312 SBA 3-45 AW 50 Hz

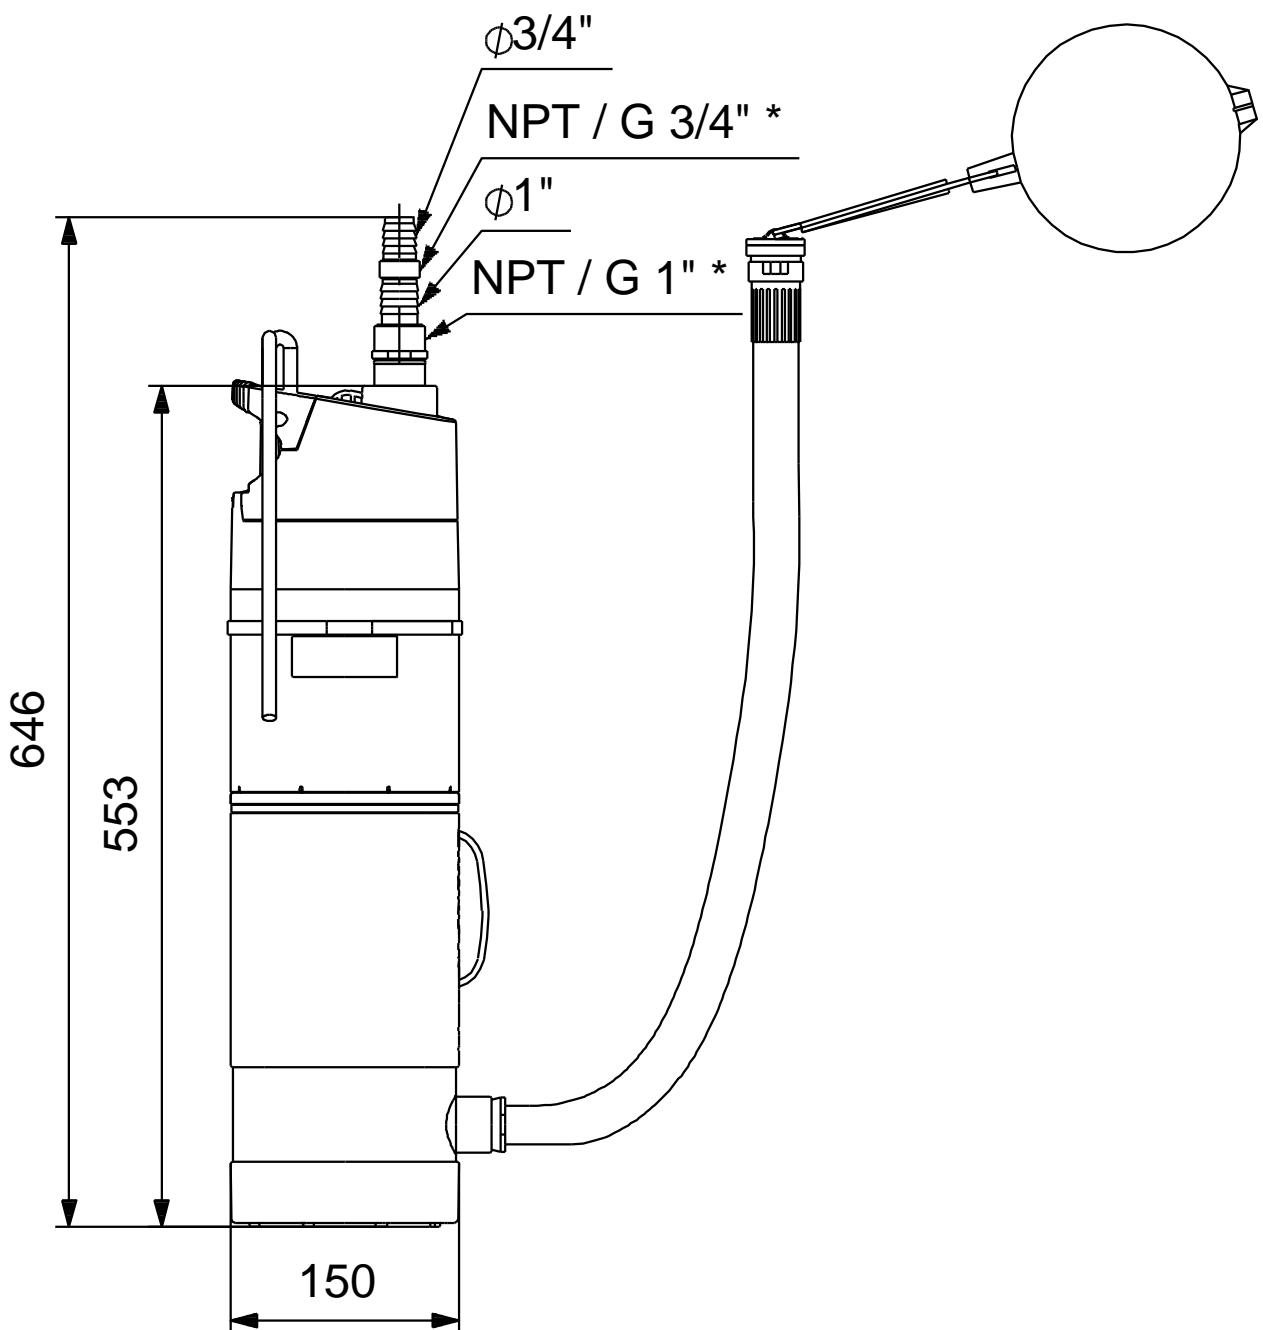

Atkreipkite dėmesį! Visi matmenys, jei nenurodyta kitaip, pateikti milimetrais.
Atsakomybės apribojimas: šiame supaprastintame matmenyje brėžinyje neparodytos visos detalės.