

PSFL-2

PUMP STAND KIT PLASTIC FIBERWOUND

FIGURE #1







FIGURE #2






- INSTALL PUMPSTAND LEG (390.0179), TO THE TANK DOME, BY ROTATING CLOCKWISE UNTIL HAND TIGHT.
- INSTALL AIR VALVE EXTENSION (310.0011), TO THE AIR VALVE, BY ROTATING THE COLLAR CLOCKWISE UNTIL HAND TIGHT.
- SEE FIGURE #4 FOR CORRECT ASSEMBLY. AIR VALVE EXTENSION POSITIONED AS SHOWN.

FIGURE #3



 INSTALL RÜBBER CAPS (390.0182), TO THE PUMPSTAND, BY PUSHING ONTO LEGS.

FIGURE #4

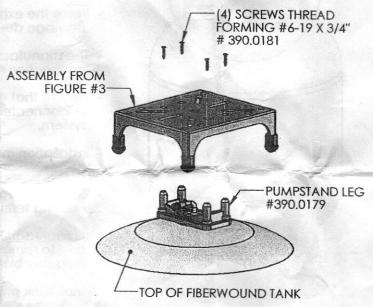

- POSITION ASSEMBLY FROM FIGURE #3 ONTO POSTS OF PUMPSTAND LEG #390.0179.
- INSTALL (4), FOUR, THREAD FORMING SCREWS # 390.0181 THROUGH THE PUMPSTAND, INTO THE PUMPSTAND LEG.

620.0410 REV-A PAGE 1 of 2