


Tideway

PNEUMATIC DIAPHRAGM PUMP

(GMB-50 2")



Aluminum

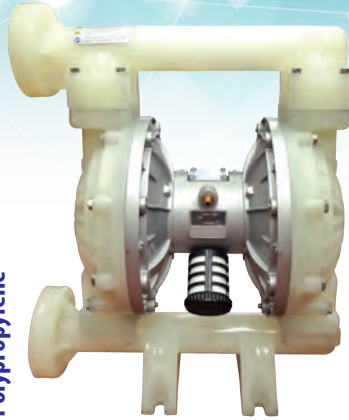


Polypropylene




Stainless Steel

Air Consumption (m³/h)

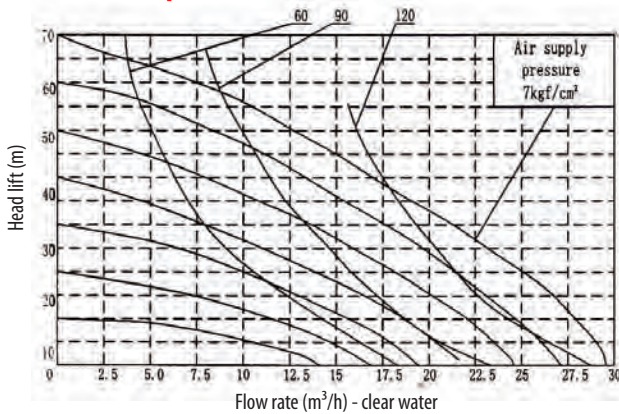

Installation Dimension

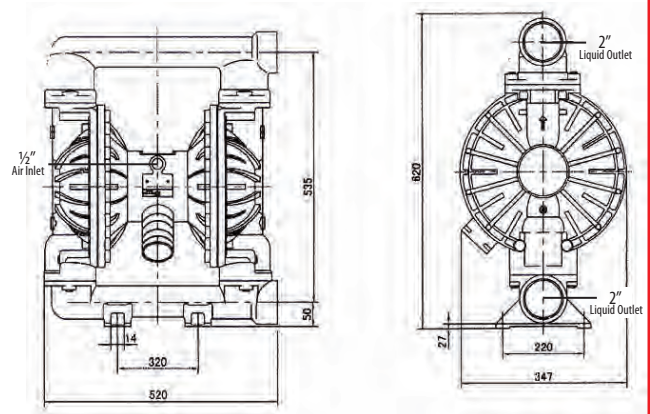

Technical Parameters

Max. Flow Rate	0 - 22 m ³ /h		
Max. Lift head	0 - 70 m		
Outlet pressure	0 - 6 kgf/cm ²		
Suction lift	0 - 5 m		
Allowable diameter of grains passing	0 - 8 mm		
Air supply pressure	0 - 7 kgf/cm ²		
Air consumption	0 - 900 L/min		
Air Inlet	½ inch		
Air Outlet	¾ inch		
Net weight	Polypropylene - 24 kg		
	Aluminum - 54 kg		
	Stainless Steel - 75 kg		
Gross weight	Carton packaging, plus : 18 kg		
881218012A - GMB2S-50TFF	881218024A - GMB2A-50TFF	881218025A - GMB2A-50B	881218028A - GMB2P-50TFF

*** Product's specification subject to change without further notice.
 *** Actual product may slightly differ from pictures shown.

ESM411 - GMB50
 (16/12/19)