


Company name
 Respons. Department
 Person in charge
 Phone number
 Fax no
 E-mail address

Receiver	From

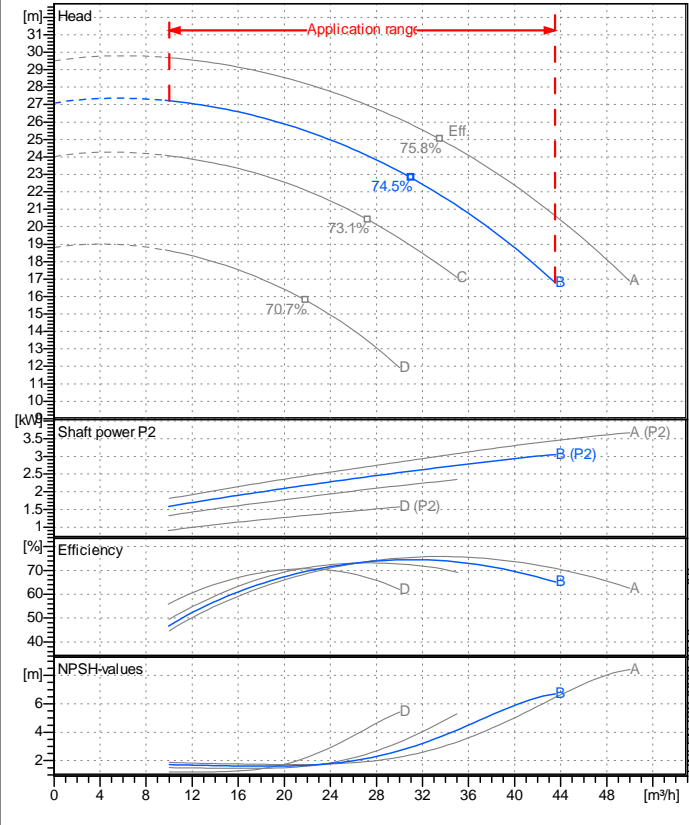

Operating data specification

Nominal flow	m³/h 0
Nominal head	m 0
Static head	m 0
NPSH - v value of plant	m 0
Inlet pressure	bar 0.09793
Fluid	Water, pure
Operating temperature t A	°C 20
Density at t A	kg/dm³ 0.9983
Kin. viscosity at t A	mm²/s 1.005

Pump



Pump name	IR40-125SB		
Size	65/40/125		
MEI (Reg. 547/2002 EU) >	0,7		
Speed 1/min	2900	No of stages	1
Impeller type			
Flow	Nominal	m³/h	
	Max-	m³/h	43.5
	Min-	m³/h	10
Head	Nominal	m	
	Max-	m	27.2
	Min-	m	16.8
Head H(Q=0)	m 27.1		
NPSH 3%	m		
Max. working pressure	bar 2.65		
Shaft power	kW		
Efficiency	%		
Max absorbed power	kW 3.0502		

Materials Pump

Shaft	Stainless steel AISI 431 (1.4057)		
Impeller	Cast iron EN-GJL-250		
Pump body	Cast iron EN-GJL-250		
Seal disc	Cast iron EN-GJL-250		
Gasket	Natural fiber		
Mechanical seal	BVEG (Grafito/Ossido Allumina/EPDM)		

Dimensions in mm

a	80	DNM	DNA
b	50	C	122
h1	112	D	185
h2	140	DN	65
m1	100	K	145
m2	70	n°	4 x 19 mm
n1	210	4 x 19 mm	
n2	160		
s	14		

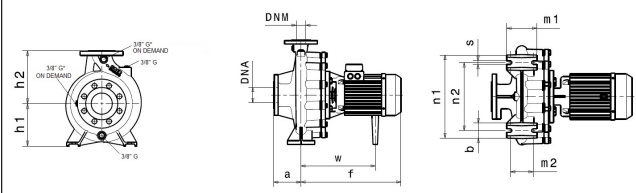

Motor	Manufacturer / Type	SAER	100-2P-4	
Efficiency	IEC 60034-30	IE3		
Rated power	kW 3	Efficiency 4/4	87.7 %	
Number of poles	2	Frame size	100	
Electric current	A 6.5 A	Speed	1/min	2898
Electric voltage	V 380 V	3~	Hz	50
Starting mode	Unknown			
Degree of protection	IP 55	Insulation class	F	


Remarks:

Project	Project ID	Created by	Created on	Last update
			2021-08-05	

Company name
 Respons. Department
 Person in charge
 Phone number
 Fax no
 E-mail address

Operating area	Flow	Head	Impeller type
Operating data specification	0 m ³ /h	0 m	Impeller construction: Closed
Pump data	m ³ /h	m	Sense of rotation: Clockwise from the drive end
			Outlet width: DN40
	Flow	Head	Shaft power P2
	Min. Max. η Max.	H(Q=0) η Max.	P2(Q=0) Max. η Max.
	m ³ /h m ³ /h m ³ /h	m m	kW kW kW
	10 43.5 31	27.1 22.8	3.05 2.58
			Speed: 1/min 2900
			Frequency: Hz 50 Hz

Performance data based to: Water, pure [100%]; 20°C; 0.998kg/dm³; 1mm²/s UNI EN ISO 9906:2012 - Grade 3B

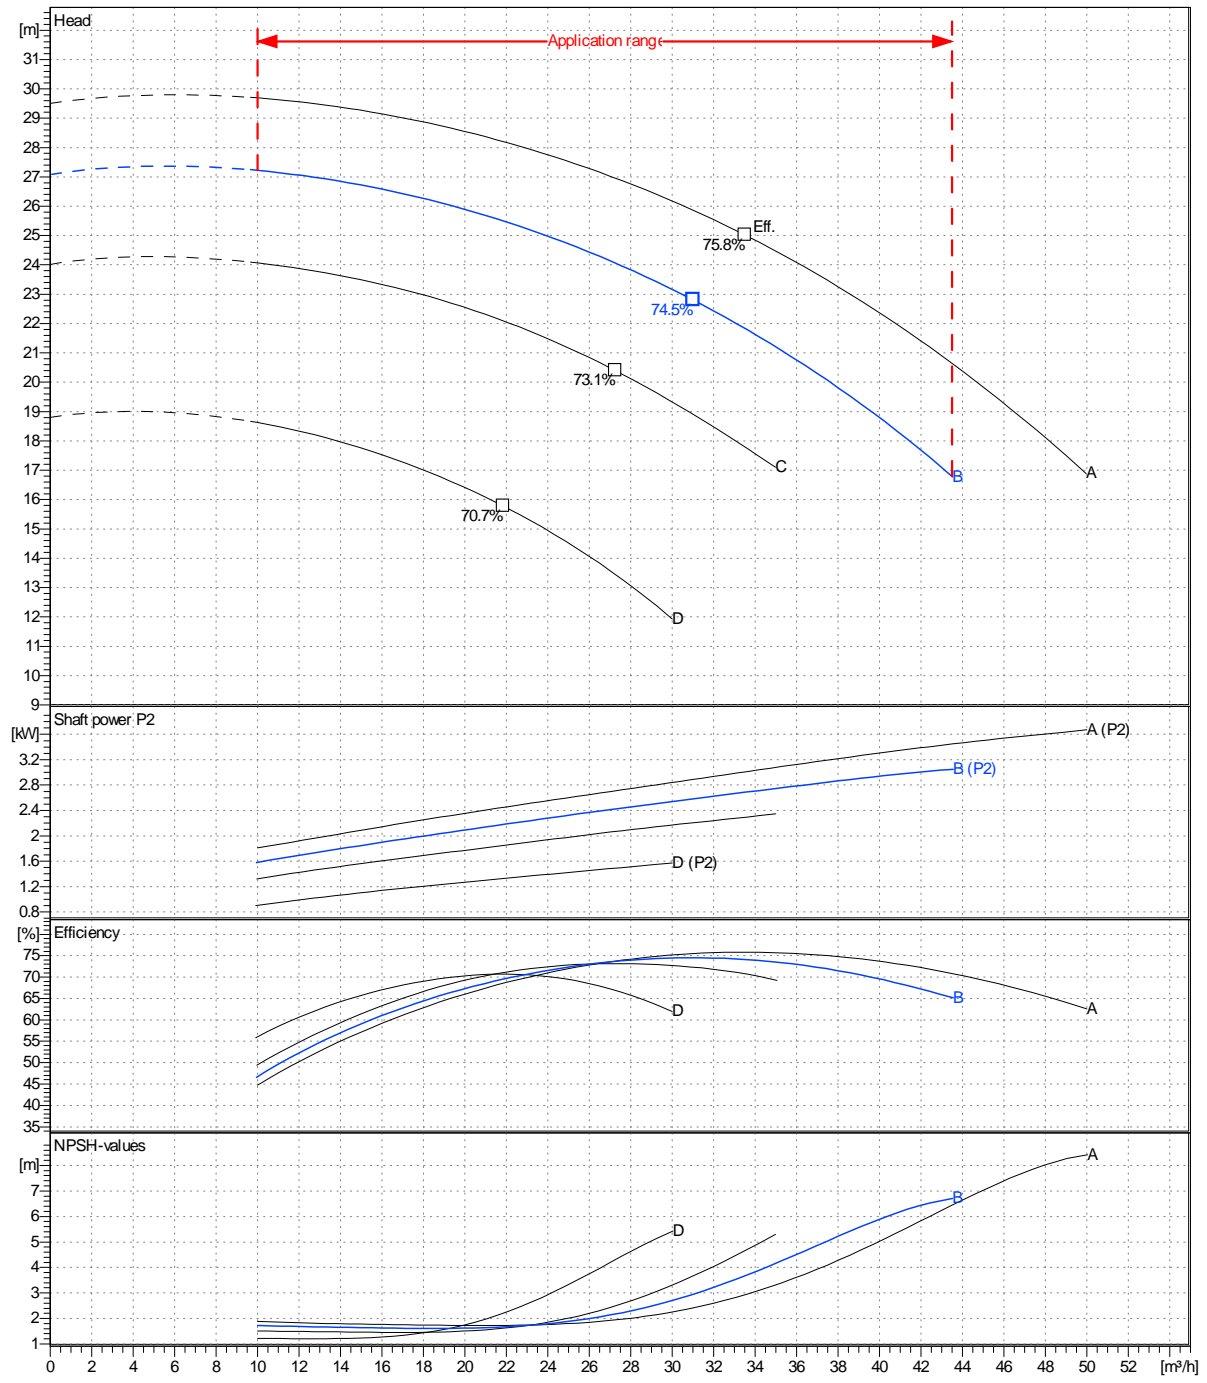

Project	Project ID	Created by	Created on	Last update
			2021-08-05	

Revision no




Pump dimensions

Connections

Suction side	Discharge port
DN65	DN40
PN10 / PN16	PN10 / PN16

Dimensions in mm

a	80		
b	50		
h1	112		
h2	140		
m1	100		
m2	70		
n1	210		
n2	160		
s	14		

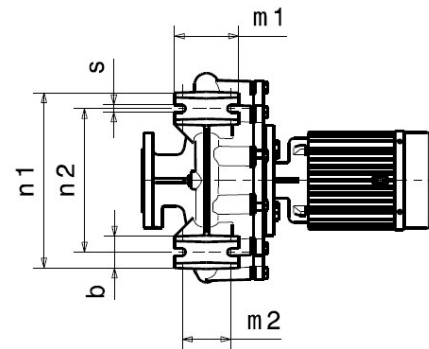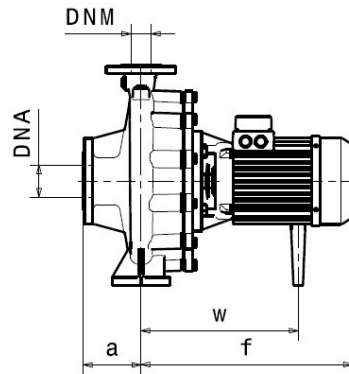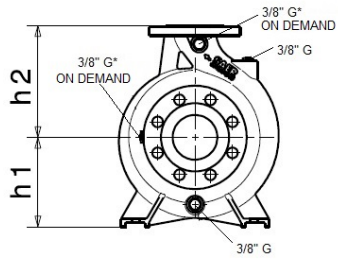

Disegni dimensionali e immagini non vincolanti. Saer si riserva il diritto di effettuare cambiamenti senza alcun preavviso.
Dimensional drawing and picture are not binding. Saer reserves the right to make changes without prior notice.

Project

Project ID

Created by

Created on
2021-08-05

Last update