

ELETTROPOMPE SOMMERSE PER DRENAGGIO CON GALLEGGIANTE INTEGRATO SUBMERSIBLE DRAINAGE PUMPS WITH INTEGRATED FLOATER

LIMITI D'IMPIEGO

- Temperatura liquido fino a 35°C
(per un uso domestico secondo EN 60335-2-41)
Temperatura max. liquido: 35°C (per altri impieghi)
- Profondità d'immersione 5 mt.
- Livello min. d'aspirazione 15 mm

MOTORE

- Protezione amperometrica a riarmo automatico incorporata
- Condensatore permanente inserito
- Isolamento Classe F
- Protezione IP 68
- Cavo alimentazione 10 mt.
- Galleggiante di serie

MATERIALI

- Maniglia Polipropilene
- Corpo pompa Polipropilene
- Girante Noryl
- Fondello pompa Acciaio Inox
- Cassa motore Acciaio Inox
- Albero motore Acciaio Inox
- Tenuta meccanica lubrificata

OPERATING CONDITIONS

- Liquid temperature up to 35°C
(for home use according to EN 60335-2-41)
Temperature max. liquid: 35°C (for other uses)
- Submersion depth 5 mt.
- Min. suction level 15 mm

MOTOR


- Built-in overload motor protector with automatic reset
- Permanent split capacitor
- Insulation Class F
- Protection IP 68
- Power cable 10 mt.
- Standard floater

MATERIALS

- Handle Moplen
- Pump body Moplen
- Impeller Noryl
- Pump backplate Stainless Steel
- Motor casing Stainless Steel
- Shaft with rotor Stainless Steel
- Mechanical lubricated seal



TIPO - TYPE	SDC 350 G	SDC 550 G
P1	350 W	550 W
Voltage	230 V	230 V
Frequency	50 Hz	50 Hz
Ampere	1,7 A	3 A
Q max.	130 l/1'	170 l/1'
H max.	5,5 m	8,5 m
DNM	1"¼	1"¼
Dimensions (P x L x H)	206 x 233 x 342 mm	206 x 233 x 342 mm
Weight	4,7 kg	5,6 kg

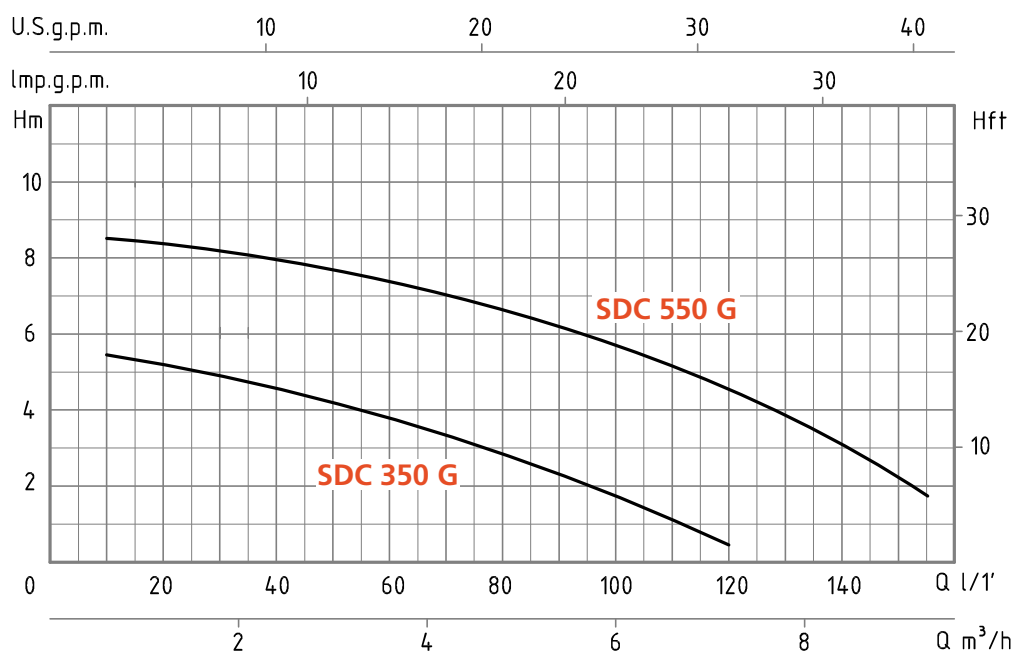

Galleggiante integrato con pulsante di controllo manuale/automatico
Integrated floater with manual/automatic control button

