



Technical data

Date	2/4/2021
Offer N.	---
Type	DB150


Client	UAB Vandens siurbliai	Reference	---
--------	-----------------------	-----------	-----

Pump data

Pump body	cast iron	Drainage pump with "Double-Channel" impeller for pumping charged waters and liquids with suspended solids; ideal for civil and household applications.
Shell, motor cover, base support	stainless steel	
Impeller	stainless steel	
Mechanical seal	double seal with oil barrier: silicon carbide on pump	
Motor shaft	stainless steel AISI 430	
Passage of solids	Ø max 50 mm	
Depth of immersion	max 5 m	
Liquid temperature	0 - 40 °C	
Cable	H07 RNF, 10 m	
G	float switch	

W	AMPERE		Q (m3/h - l/min)							
	1~ 1x230V	3~ 3x400V	0	6	12	18	24	30	36	39
1700	8,0	2,8	13.6	11.2	10	8.5	7.3	6	4.3	3.4

Technical Sheet

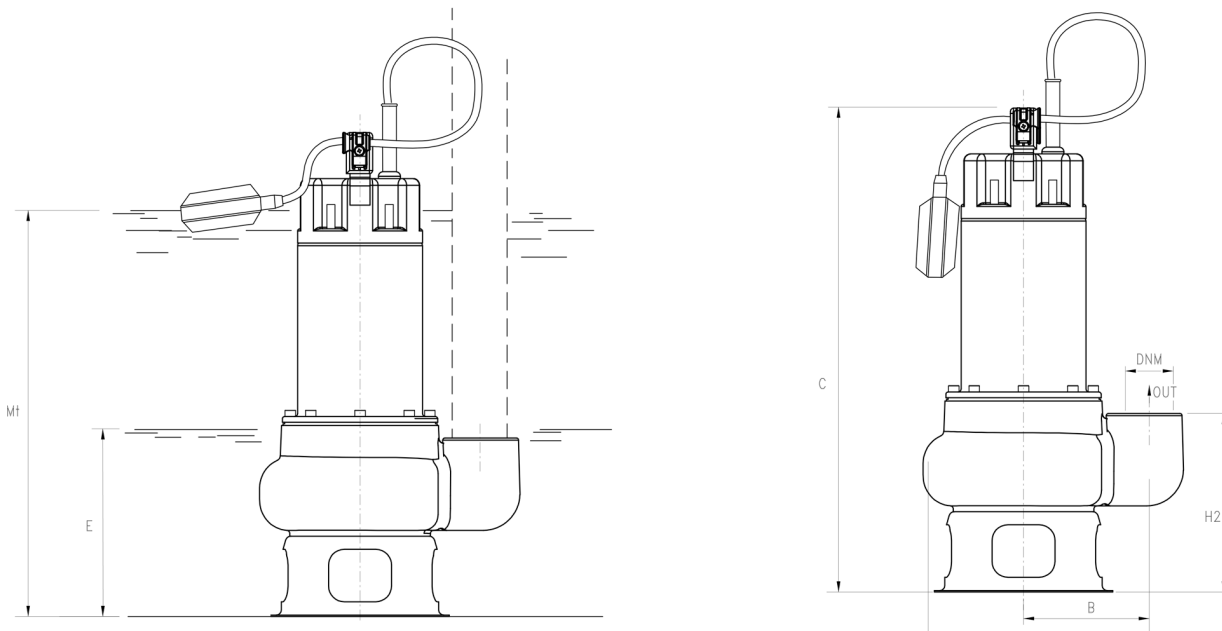

DIMENSIONS (mm)						DNM	PACKAGING (mm)			Kg
B	C	D	E	H2	Mt		I	L	M	
142,5	461	247,5	185	170	390	2°G	200	260	470	17

Notes

The information may be subject to change without notice. It is always advisable to contact our commercial department in order to get further information about the products, their technical specifications and warranty conditions. The Company is expressly relieved of any liability for the purchasing of a product not in line with the customer's needs, if not consulted beforehand for a specific consultancy.



Working Curves

Pump type: DB150

Curv n°:	DB150
Date:	2/4/2021

Q (l/min) 550 | H (m) 6 | Power [kW] 1.58 | Efficiency % - | NPSH (m) -

