

Receiver

Society
Reference
Address
Phone
Fax
E-mail

From

Item n° :

60187267

Model :

EVOSTA2 11/85 SAN R 1/2"

Pump data

Pressure rating : 1 MPa
Min. fluid temperature : 2 °C
Max. fluid temperature : 75 °C
EEI : ≤

Minimum suction head :

Temperature °C 90
Minimum suction head : m 10

Requested data

Flow :
Head :
Fluid (%) :
Fluid Temperature : 20 °C
Density : 998,3 kg/m³
Kinematic viscosity : 1,005 mm²/s
Vapor pressure :



Hydraulic data (duty point)

Flow :
Head :

Materials

Pump body Brass

Curve tolerance according to ISO 9906

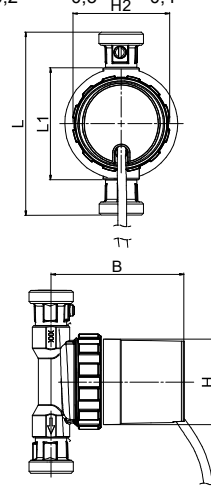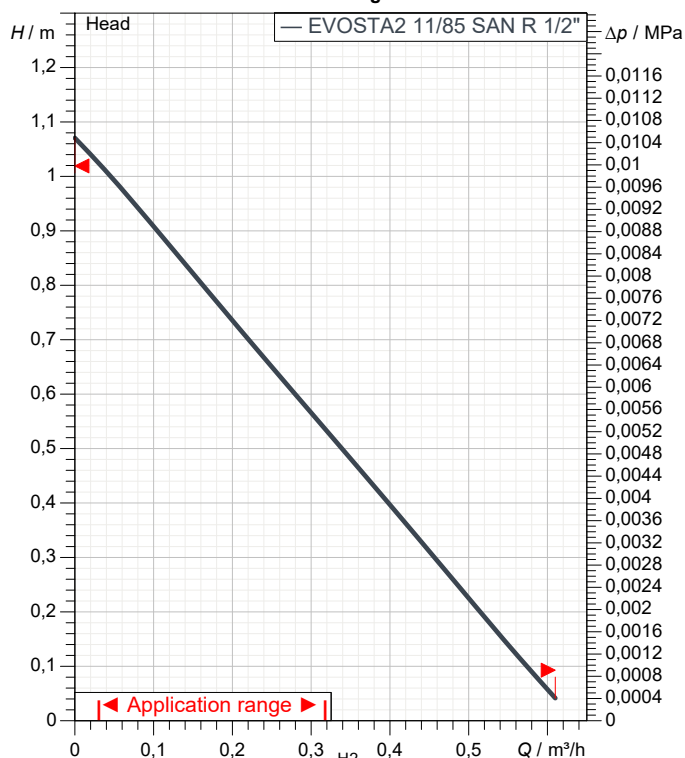

Motor data

Motor brand : DAB
Power input P1 : 0,007 kW
Rated voltage : 1~ 230 V 50 Hz
Nominal current : 0,07 A
Degree of protection : IP 42

Dimensions in mm

B	100						
H	65						
H2	72						
L	-						
L1	85						

Weight : 1,26 kg

Pump connection

Suction side : 1/2 " G
Discharge side : 1/2 " G


Receiver

From

Society
Reference
Address
Phone
Fax
E-mail

EVOSTA2 11/85 SAN R 1/2"

Curve tolerance according to ISO 9906

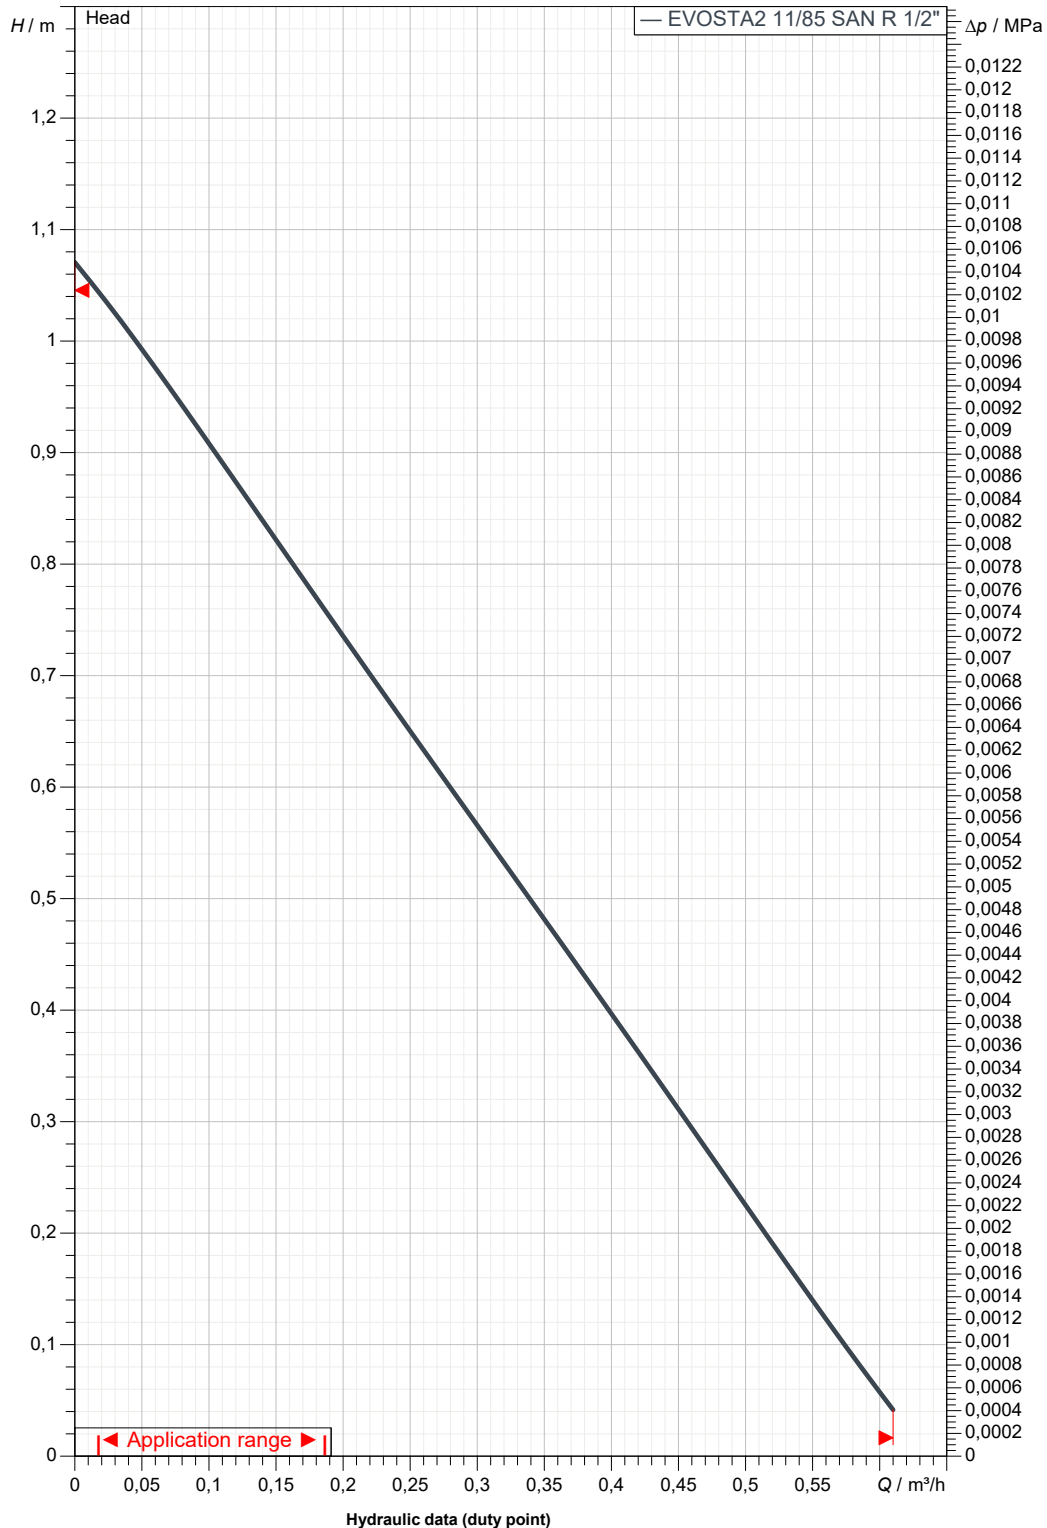

Suction side :
1/2" G
10 bar (1000 KPa)

Discharge side :
1/2" G
10 bar (1000 KPa)

Flow :

Head :

Rated speed :
2.900 1/min

MAIN_PROJECT_TITLE

BUSINESS_PROCESS_IL

OWNER_

ISSUE_DATE



DIMENSIONAL DRAWING

2019-12-11

Page 3 / 3


DAB PUMPS S.p.A.
Via Marco Polo, 14 - 35035 Mestrino (PD), Italy
Tel. +39 049 5125000 - Fax +39 049 5125950
www.dabpumps.com

Receiver

From

Society
Reference
Address
Phone
Fax
E-mail

EVOSTA2 11/85 SAN R 1/2"

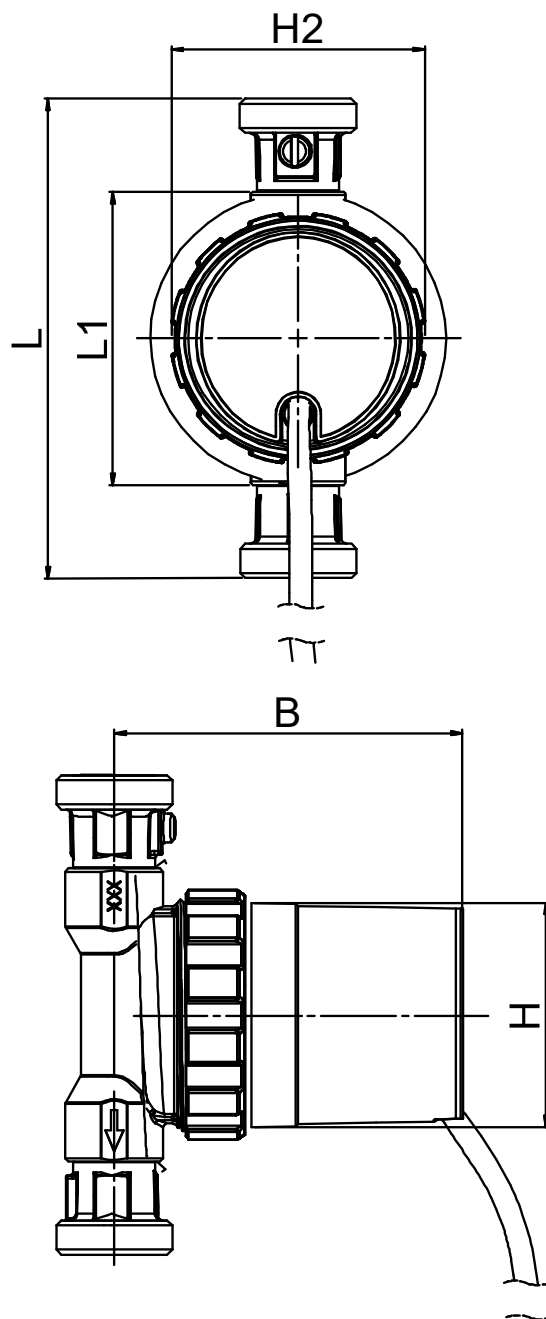

Dimensions in mm

Pump connection

1	B	100					
2	H	65					
3	H2	72					
4	L	-					
5	L1	85					
6							
7							
8							
9							
10							
11							
12							

Suction
1/2 " G
10 bar (1000 KPa)

Discharge
1/2 " G
10 bar (1000 KPa)

MAIN_PROJECT_TITLE

BUSINESS_PROCESS_IC

OWNER_

ISSUE_DATE