

# VS 30 50 Hz


## TECHNICAL DATA - PUMPS WITH ENCAPSULATED MOTOR

Pump model	Motor			Dimensions					Pump weight [Kg]
	Type	[kW]	[HP]	L1 [mm]	L2 [mm]	Lt [mm]	D [mm]		
							1 cable	2 cable	
VS 30/3	E4	3.7	5	622	520	1142	142.5	-	34
VS 30/4	E4	5.5	7.5	707.5	652.5	1360	142.5	-	43.5
VS 30/5	E4	7.5	10	793	730.5	1523.5	142.5	-	50
VS 30/6	E4	7.5	10	878.5	730.5	1609	142.5	-	52
VS 30/3	E6	4	5.5	620	581	1201	143	144.5	52
VS 30/4	E6	5.5	7.5	705.5	614.5	1320	143	144.5	58
VS 30/5	E6	7.5	10	790.5	646	1436.5	143	144.5	64
VS 30/6	E6	7.5	10	876	646	1522	143	144.5	66
VS 30/7	E6	9.3	12.5	961.5	678.5	1640	143	144.5	70.5
VS 30/8	E6	11	15	1047	711	1758	143	144.5	76.5
VS 30/9	E6	11	15	1132.5	711	1843.5	143	144.5	78.5
VS 30/10	E6	15	20	1218	776	1994	143	144.5	86
VS 30/11	E6	15	20	1303.5	776	2079.5	143	144.5	88
VS 30/12	E6	15	20	1389	776	2165	143	144.5	90
VS 30/13	E6	18.5	25	1474.5	841.5	2316	143	144.5	99
VS 30/14	E6	18.5	25	1560	841.5	2401.5	143	144.5	101.5
VS 30/15	E6	22	30	1645.5	906.5	2552	143	144.5	109.5
VS 30/16	E6	22	30	1730.5	906.5	2637	143	144.5	111.5
VS 30/17	E6	22	30	1816	906.5	2722.5	143	144.5	113.5
VS 30/18	E6	22	30	1901.5	906.5	2808	143	144.5	115.5
VS 30/19	E6	30	40	1987	1036.5	3023.5	143	144.5	132
VS 30/20	E6	30	40	2072.5	1036.5	3109	143	144.5	134.5

## TECHNICAL DATA - PUMPS WITH REWINDABLE MOTOR

Pump model	Vers. R	Motor			Dimensions					Pump weight [Kg]
		Type	[kW]	[HP]	L1 [mm]	L2 [mm]	Lt [mm]	D [mm]		
								1 cable	2 cable	
VS 30/3	●	RW6	4	5.5	620	699	1319	147	147.5	62.5
VS 30/4	●	RW6	5.5	7.5	705.5	699	1404.5	147	147.5	65
VS 30/5	●	RW6	7.5	10	790.5	719	1509.5	147	147.5	69
VS 30/6	●	RW6	7.5	10	876	719	1595	147	147.5	71
VS 30/7	●	RW6	9.3	12.5	961.5	749	1710.5	147	147.5	76
VS 30/8	●	RW6	11	15	1047	779	1826	147	147.5	81.5
VS 30/9	●	RW6	11	15	1132.5	779	1911.5	147	147.5	83.5
VS 30/10	●	RW6	13	17.5	1218	829	2047	147	147.5	90.5
VS 30/11	●	RW6	15	20	1303.5	874	2177.5	147	147.5	97.5
VS 30/12	●	RW6	15	20	1389	874	2263	147	147.5	99.5
VS 30/13	●	RW6	18.5	25	1474.5	919	2393.5	147	147.5	105.5
VS 30/14	●	RW6	18.5	25	1560	919	2479	147	147.5	108
VS 30/15	●	RW6	22	30	1645.5	1009	2654.5	147	147.5	119
VS 30/16	●	RW6	22	30	1730.5	1009	2739.5	147	147.5	121
VS 30/17	●	RW6	22	30	1816	1009	2825	147	147.5	123
VS 30/18	●	RW6	22	30	1901.5	1009	2910.5	147	147.5	125
VS 30/19	●	RW6	26	35	1987	1114	3101	147	147.5	138
VS 30/20	●	RW6	26	35	2072.5	1114	3186.5	147	147.5	140.5


● = Pump available in R (AISI 904L) version

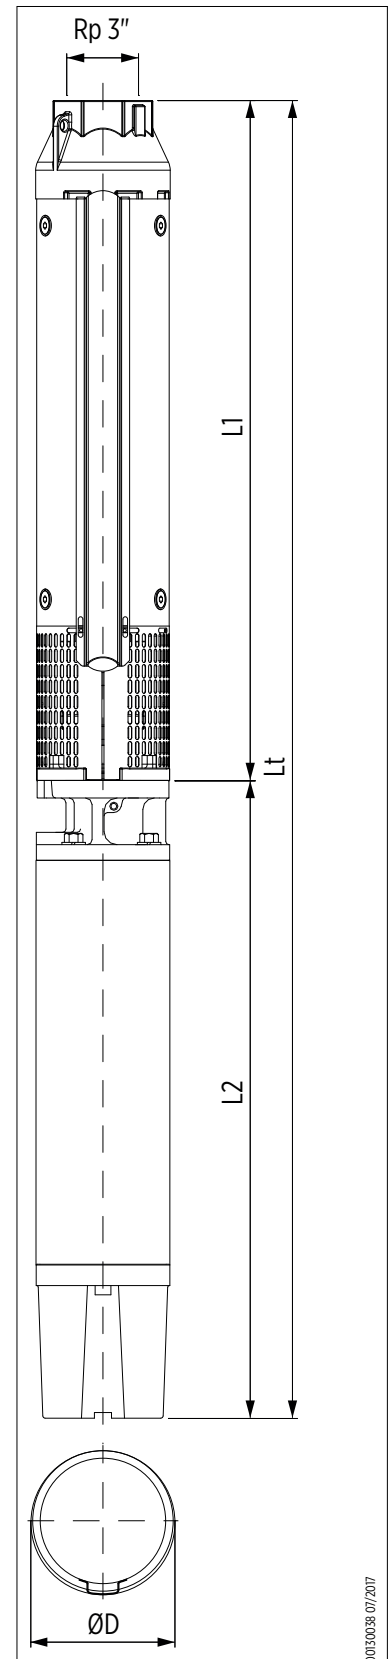

00130038 07/2017

# PERFORMANCE CURVES AT 50 Hz

MEI ≥ 0,40

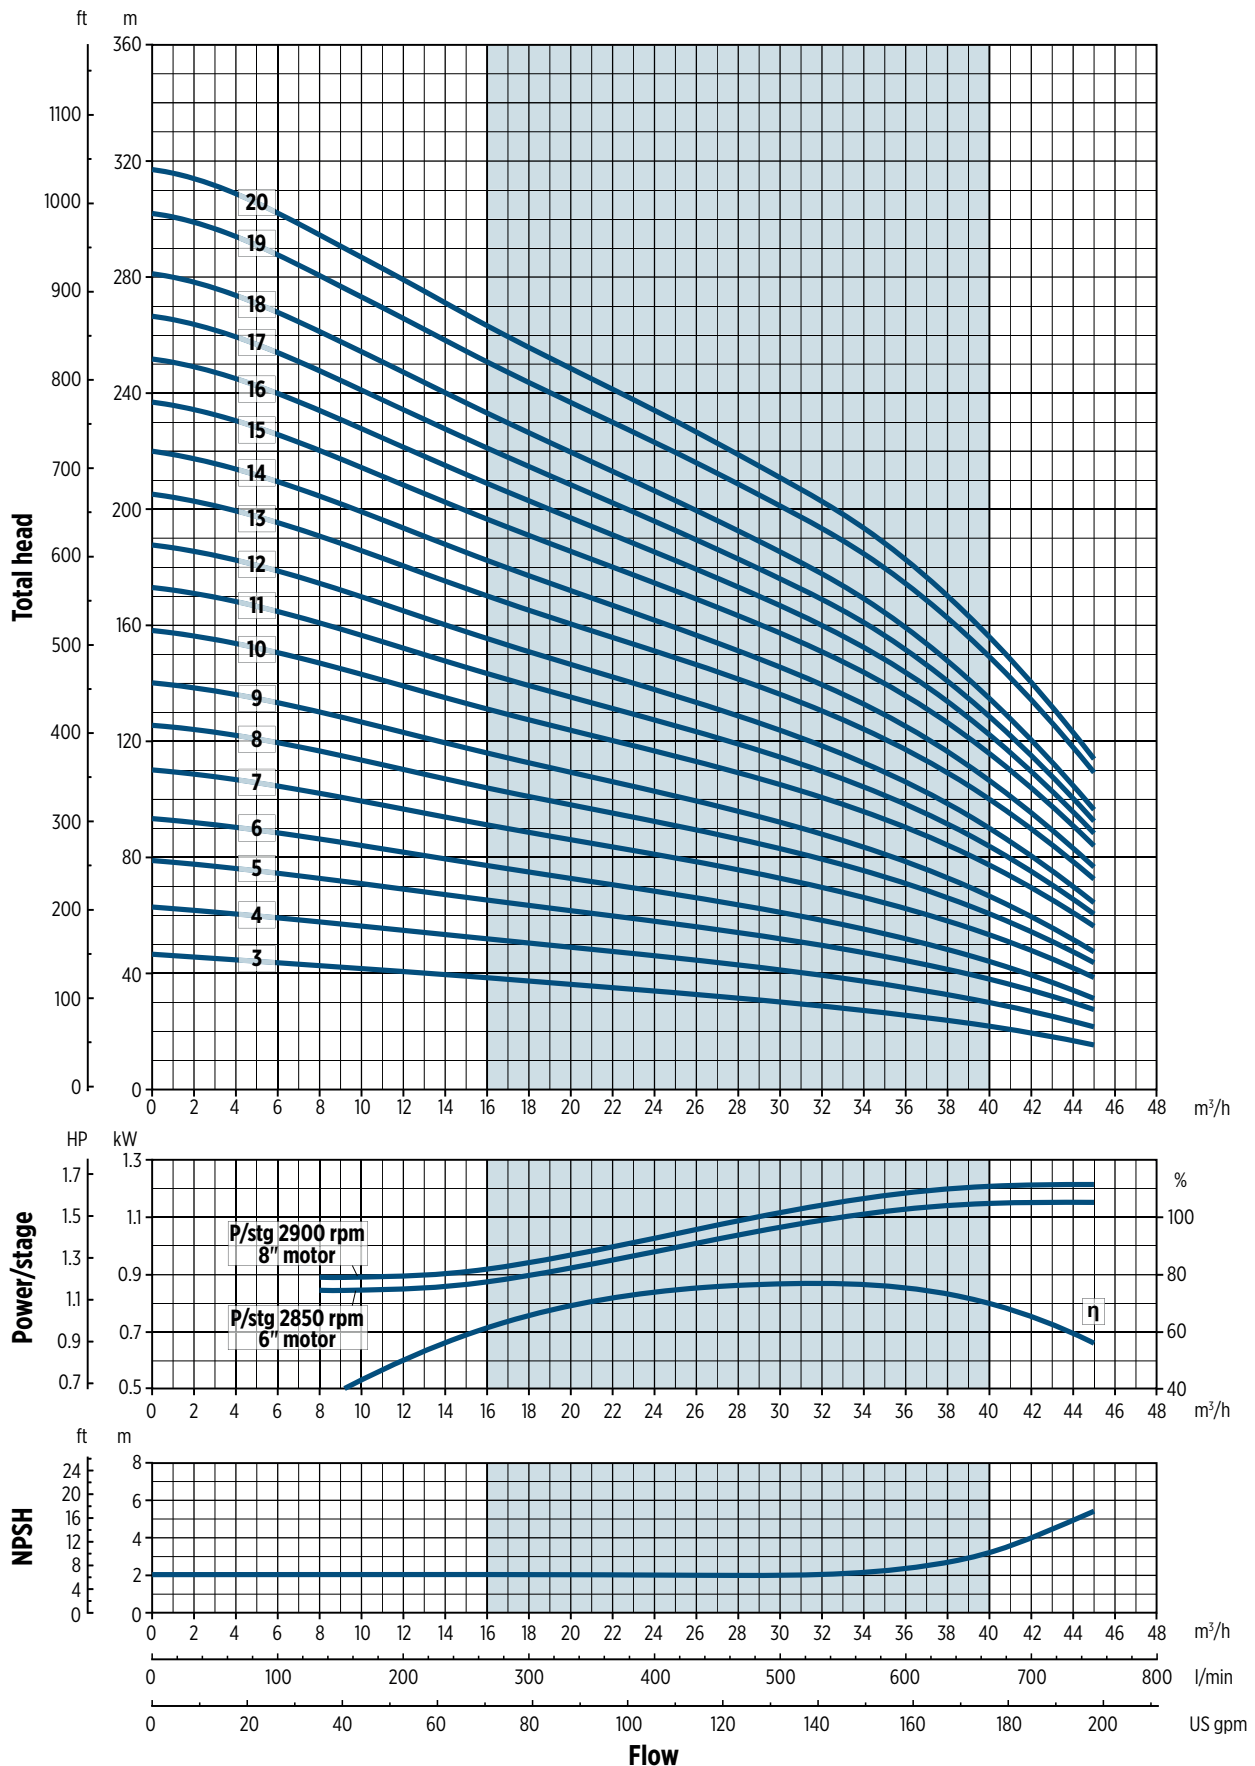

001206GEN 08/2017