

Model code: 60020041000

Data: NM 2/A/B

PUMP DATA:

H max (m):33.50

H min (m): 24.00

Q min (mc/h): 1.00

Q max (mc/h): 6.00

Impeller diameter (mm): 158.00

N. of impellers: 1

Max working pressure (bar): 0

PF:0.80

Min liquid temperature (°C): -10.00 °C

Weight (kg):15,16

MOTOR DATA:

n (rpm): 2900

Pn (kW): 0.75

Pn (HP): 1.00

Motor type: IM

Motor phase: 3~

Un (V): 230/400

fn (Hz): 50

Poles: 2

In (A): 3.7 / 2.2

Insulation class: F

Duty: S1

IE: IE3-80.7

ingress protection (IP): IP 54

MATERIALS:


Pump Casing: Cast iron GJL 200 EN 1561

Lantern Bracket: Cast iron GJL 200 EN 1561

Impeller: Brass P-Cu Zn 40 Pb 2 UNI 5705

Shaft: Chrome steel 1.4104 EN 10088 (AISI 430F)

Mechanical Seal: Carbon-Ceramic-NBR

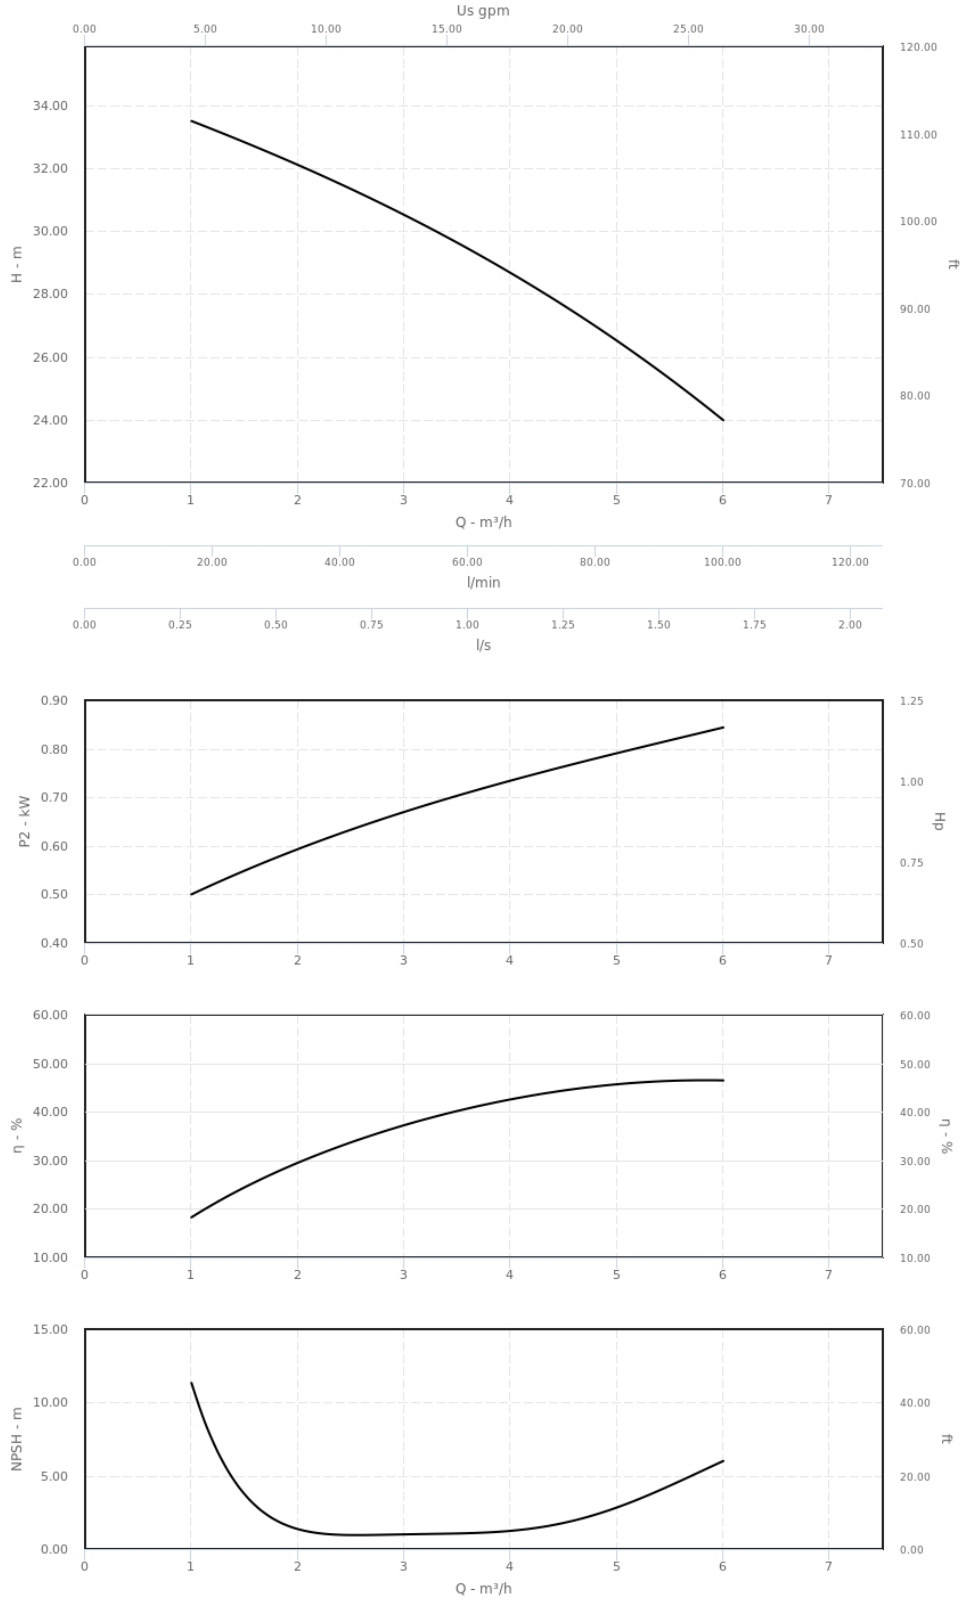

Dimensions (mm)

dn1: G 1"

dn2: G 1"

a: 45.00 mm

m1: 40.00 mm

m2: 32.00 mm

n1: 190.00 mm

n2: 160.00 mm

n3: 19.50 mm

b: 35.00 mm

fM: 306.50 mm

s1: 9.5

l1: 87.00 mm

l2: 90.00 mm

g1: 10.00 mm

h1: 95.00 mm

h2: 150.00 mm

HD: 206.00 mm

w: 212.00 mm

