

# VN 5 50Hz


## TECHNICAL DATA

Pump model		Number of stages	MOTOR POWER		INPUT POWER	Capacitor		RATED CURRENT	
Single-phase	Three-phase		[kW]	[HP]		μF	V	Single-phase	Three-phase
									220-240 V 50 Hz
VN 5/4	VN 5/4T	4	0.75	1	1.07	20	450	5.0	2.2
VN 5/5	VN 5/5T	5	0.9	1.2	1.34	30	450	6.7	2.5
VN 5/6	VN 5/6T	6	1.1	1.5	1.56	30	450	7.5	2.8
VN 5/7	VN 5/7T	7	1.5	2	1.86	35	450	9.7	3.2
VN 5/8	VN 5/8T	8	1.5	2	2.08	35	450	10.5	3.5
VN 5/9	VN 5/9T	9	2.2	3	2.35	45	450	10.7	5.0
VN 5/10	VN 5/10T	10	2.2	3	2.56	45	450	11.5	5.2


## DIMENSIONS AND WEIGHTS

Pump			Packaging				Weight [Kg]	
Single-phase	Three-phase	Lt [mm]	L [mm]	B [mm]	H [mm]	Single-phase	Three-phase	
VN 5/4	VN 5/4T	480	720	230	175			17.5
VN 5/5	VN 5/5T	504	720	230	175	19.0	17.5	
VN 5/6	VN 5/6T	528	720	230	175	19.5	18.5	
VN 5/7	VN 5/7T	602	800	230	195	22.5	20.5	
VN 5/8	VN 5/8T	626	800	230	195	23.0	21.0	
VN 5/9	VN 5/9T	650	800	230	195	25.0	23.5	
VN 5/10	VN 5/10T	674	800	230	195	25.5	24.0	

## DIMENSIONAL DRAWINGS

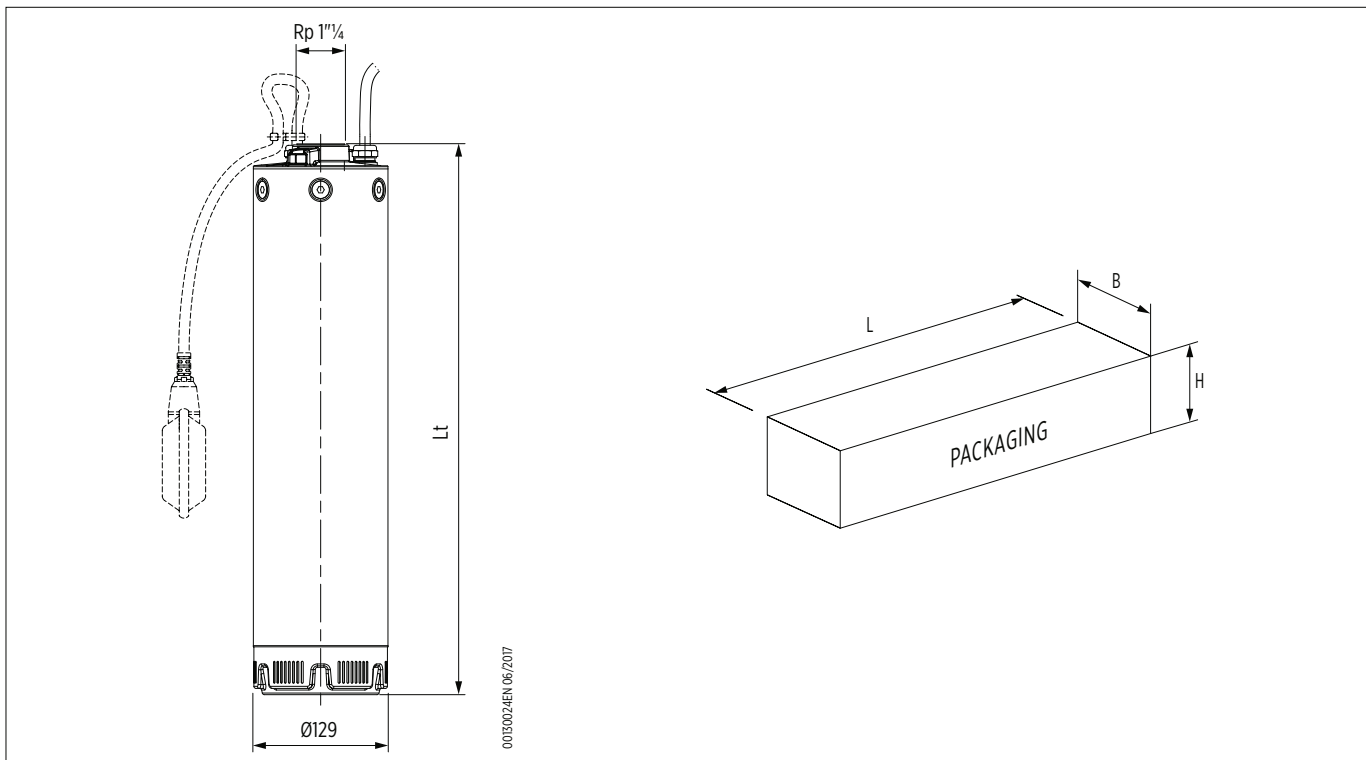

# PERFORMANCE CURVES 50Hz

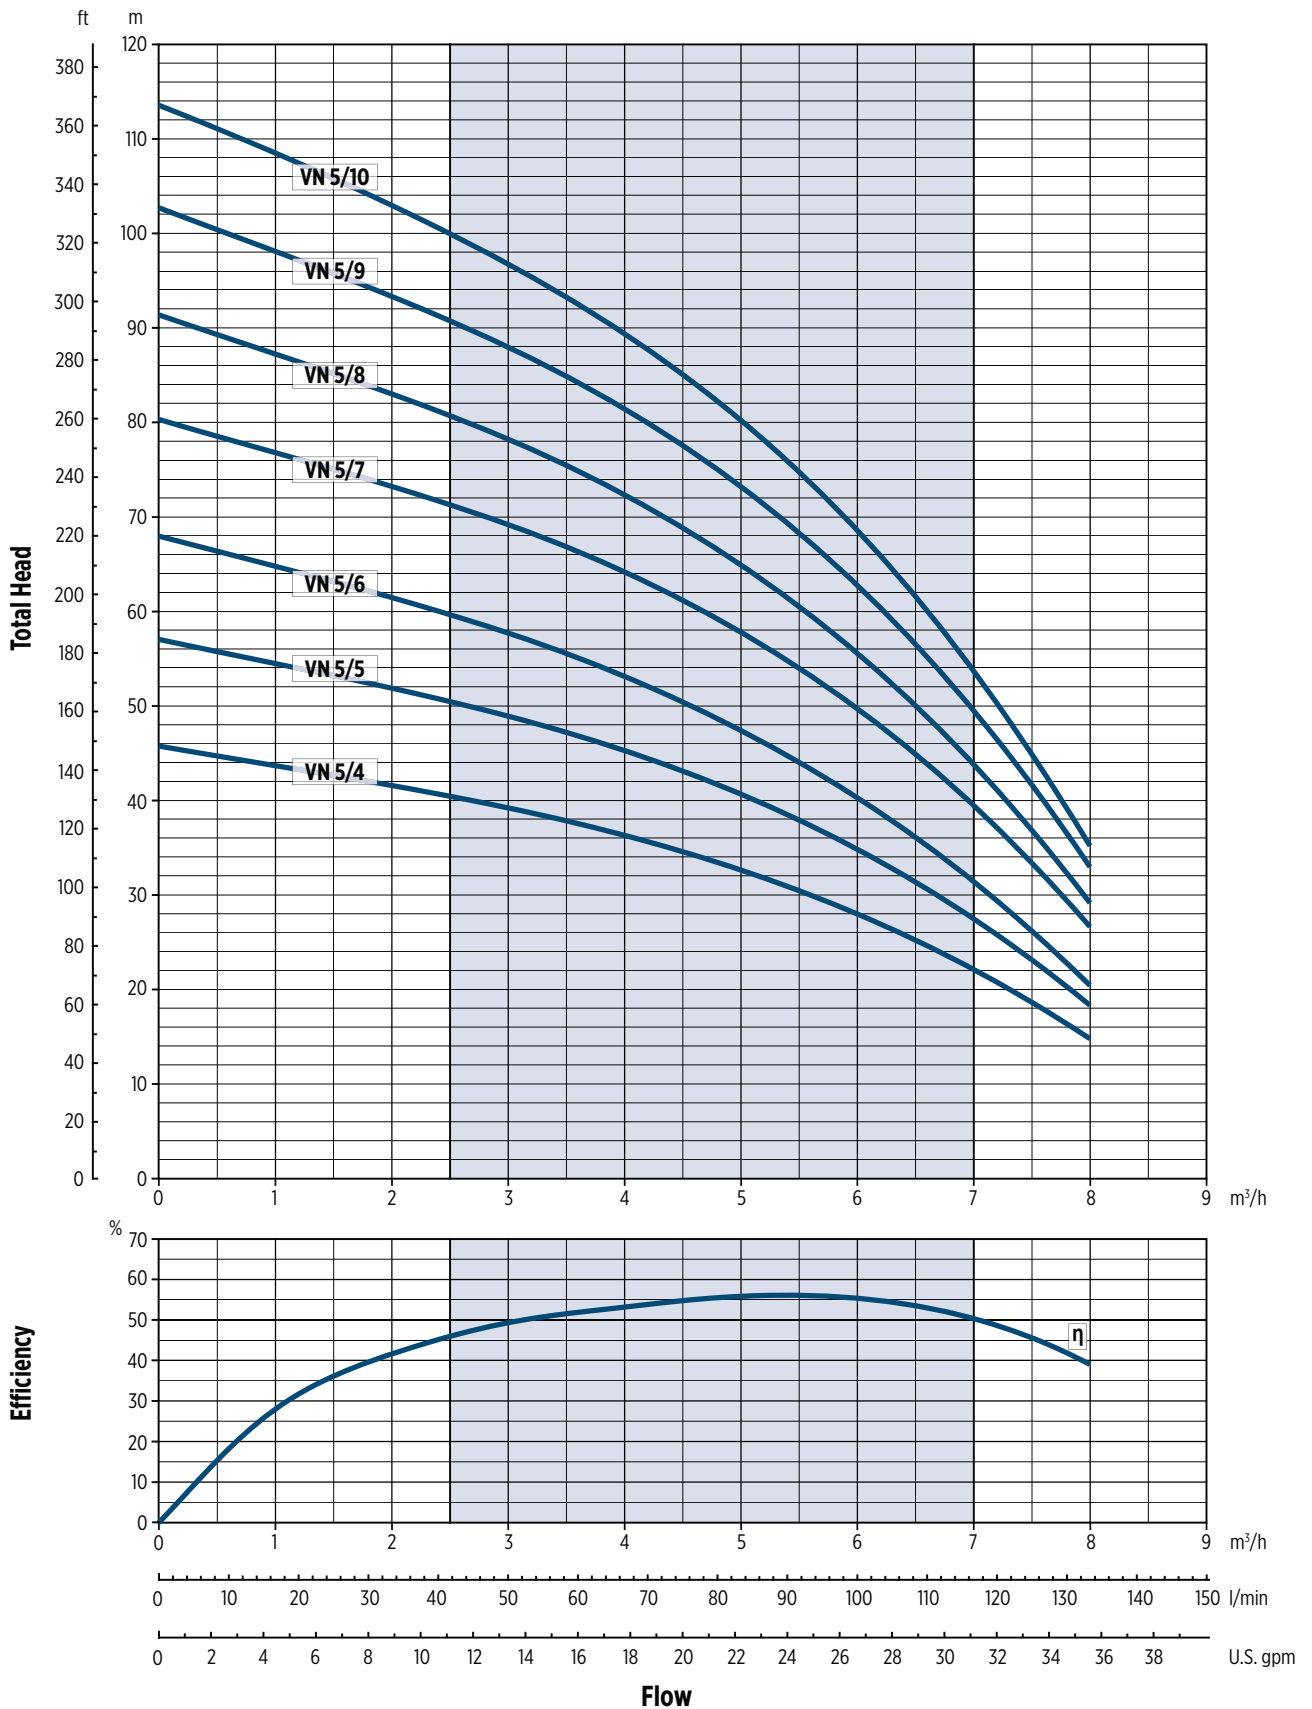

The hydraulic characteristics are guaranteed, according to ISO standard 9906:2012, grade 3B