



Dimension

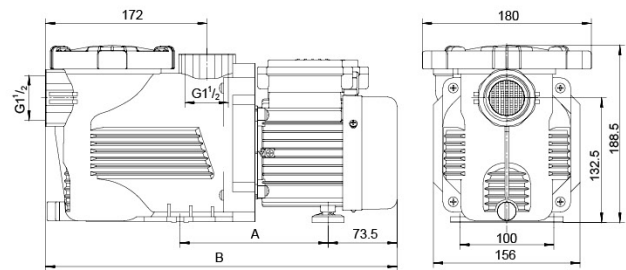

Model	A	B
XKP256	157.5	374
XKP306	157.5	374
XKP356	157.5	374
XKP456	157.5	374
XKP556	188.5	405
XKP756	188.5	405
XKP856	188.5	405

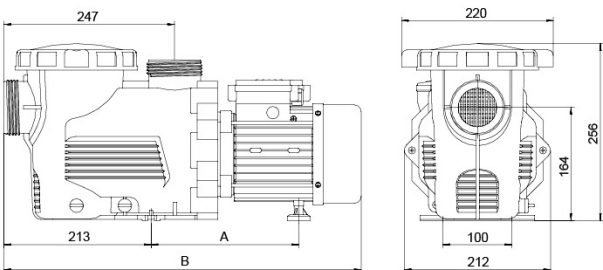

Model	A	B
XKP1106	214	518
XKP1606	250	548
XKP2206	250	548



 LEO GROUP PUMP(ZHEJIANG) CO.,LTD. (Stock code: 002131)

No.1, 3rd Street, East Industry Center, Wenling, Zhejiang, China, 317511  
Tel: +86-576-8998 6360    Fax: +86-576-8998 9898    E-mail: export@leogroup.cn    www.leogroup.cn

LEO reserves all the right of products modification without prior notification.

LEO GROUP PUMP(ZHEJIANG) CO.,LTD.

SWIMMING PUMP








FOR A BETTER LIFE  
EUROPEAN QUALITY • ELEGANT AND REFINED  
BRING DIFFERENT BEAUTY TO THE POOL

What benefit you can get

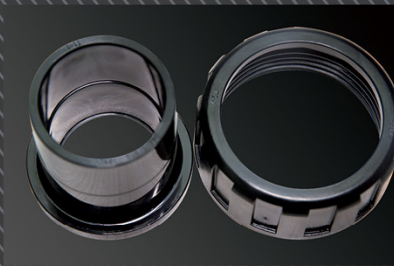

Double size connector  
Easy to install




Special designed pump cover  
Easy to disassemble



Timer as request  
Smarter work



Drain plug  
Convenient and anti-freeze

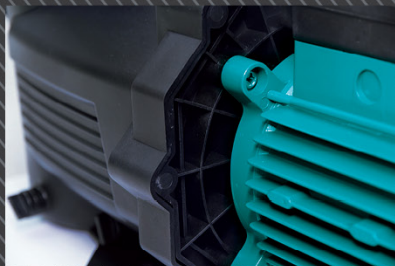

Embedded structure  
Completely water-proof




Working Conditions

Medium temperature: 5 - 50℃  
Environmental temperature: ≤ 40℃  
Max.working pressure: 0.3 MPa  
Ingress protection: IPX5  
Insulation Class: F  
Motor: 380V/50Hz, 220V/50Hz, 220V/60Hz,110V/60Hz

Features

Safe and reliable waterproof motor  
Safe with built-in thermal protector  
Reliable motor allows SI to work continuously  
Proof against swimming pool chemicals  
Durable with reinforced engineering plastic wet part

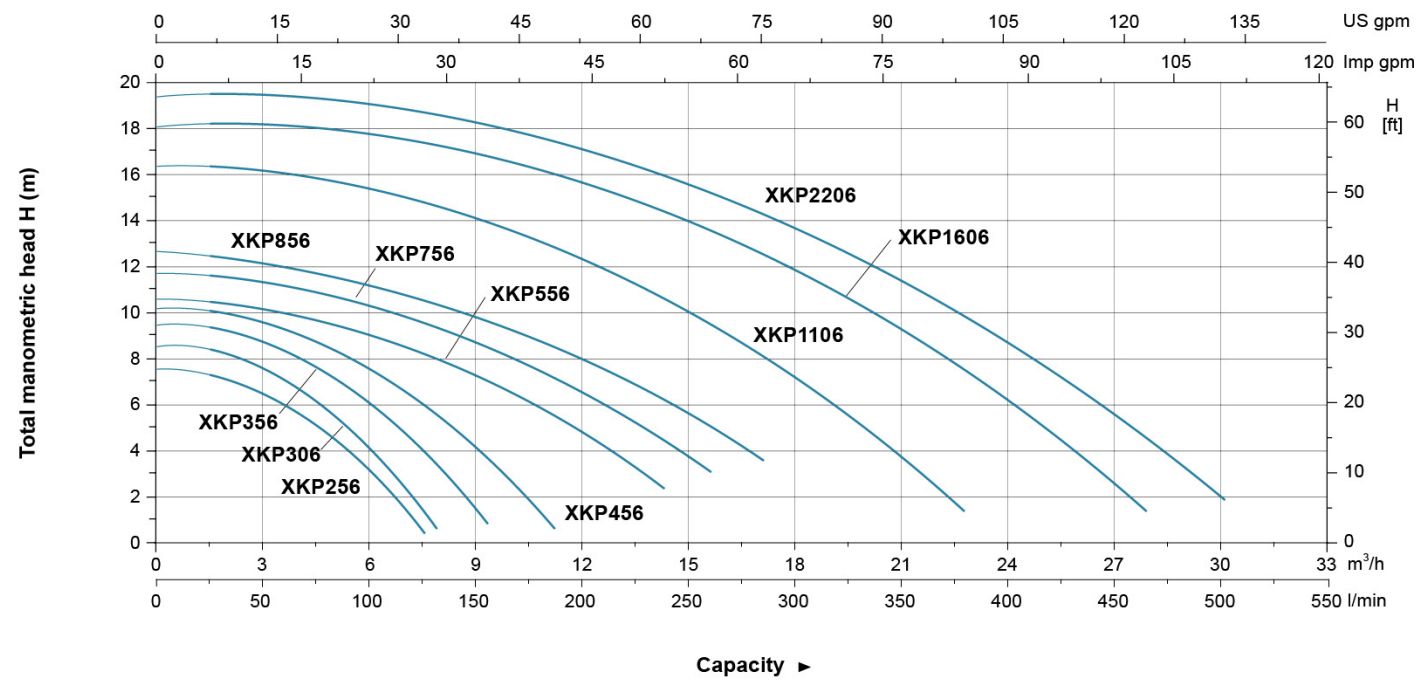

Model	MAX.Flow (L/min)	MAX.Head (m)	Input Power (W)	GW (Kg)	Connector Size	Package Size (mm)
XKP256	125	7.5	250	5.5	Standard connector (inch) 1.5"	410×170×200
XKP306	125	8.5	300	5.6		410×170×200
XKP356	160	9.5	350	5.8		410×170×200
XKP456	185	10	450	6		410×170×200
XKP556	235	10.5	550	6.2		440×170×200
XKP756	260	11.5	750	6.8		440×170×200
XKP856	285	12	850	7.2		440×170×200
XKP1106	375	16	1100	11.8	Double size connector (mm) 48.5&50 60.3&63	575×240×255
XKP1606	465	18	1600	14.8		575×240×255
XKP2206	515	19.5	2200	17.5		575×240×255