

Data: 12/11/2020

**60401523000: NM 65/16D/B**

## PUMP AND MOTOR DATA


<b>n (rpm):</b>	2900	<b>Impeller diameter (mm):</b>	143.00
<b>Max working pressure (bar):</b>	16	<b>Motor phase:</b>	3~
<b>H max (m):</b>	24.30	<b>Un (V):</b>	400/690
<b>H min (m):</b>	16.30	<b>fn (Hz):</b>	50
<b>Q min (mc/h):</b>	48.00	<b>Poles:</b>	2
<b>Q max (mc/h):</b>	120.00	<b>In (A):</b>	14.3 / 8.3
<b>Pn (kW):</b>	7.50	<b>Min liquid temperature (°C):</b>	-10.00 °C
<b>Pn (HP):</b>	10.00	<b>Weight (kg):</b>	70.400

## MATERIALS

<b>Pump Casing:</b>	Cast iron GJL 200 EN 1561	<b>Shaft:</b>	Chrome steel 1.4104 EN 10088 (AISI 430F)
<b>Lantern Bracket:</b>	Cast iron GJL 200 EN 1561	<b>Mechanical Seal:</b>	Carbon-Ceramic-NBR
<b>Impeller:</b>	Cast iron GJL 200 EN 1561	<b>Counter Flanges:</b>	Steel S235JR 1.0038 EN 10025-2

Data: 12/11/2020

60401523000: NM 65/16D/B

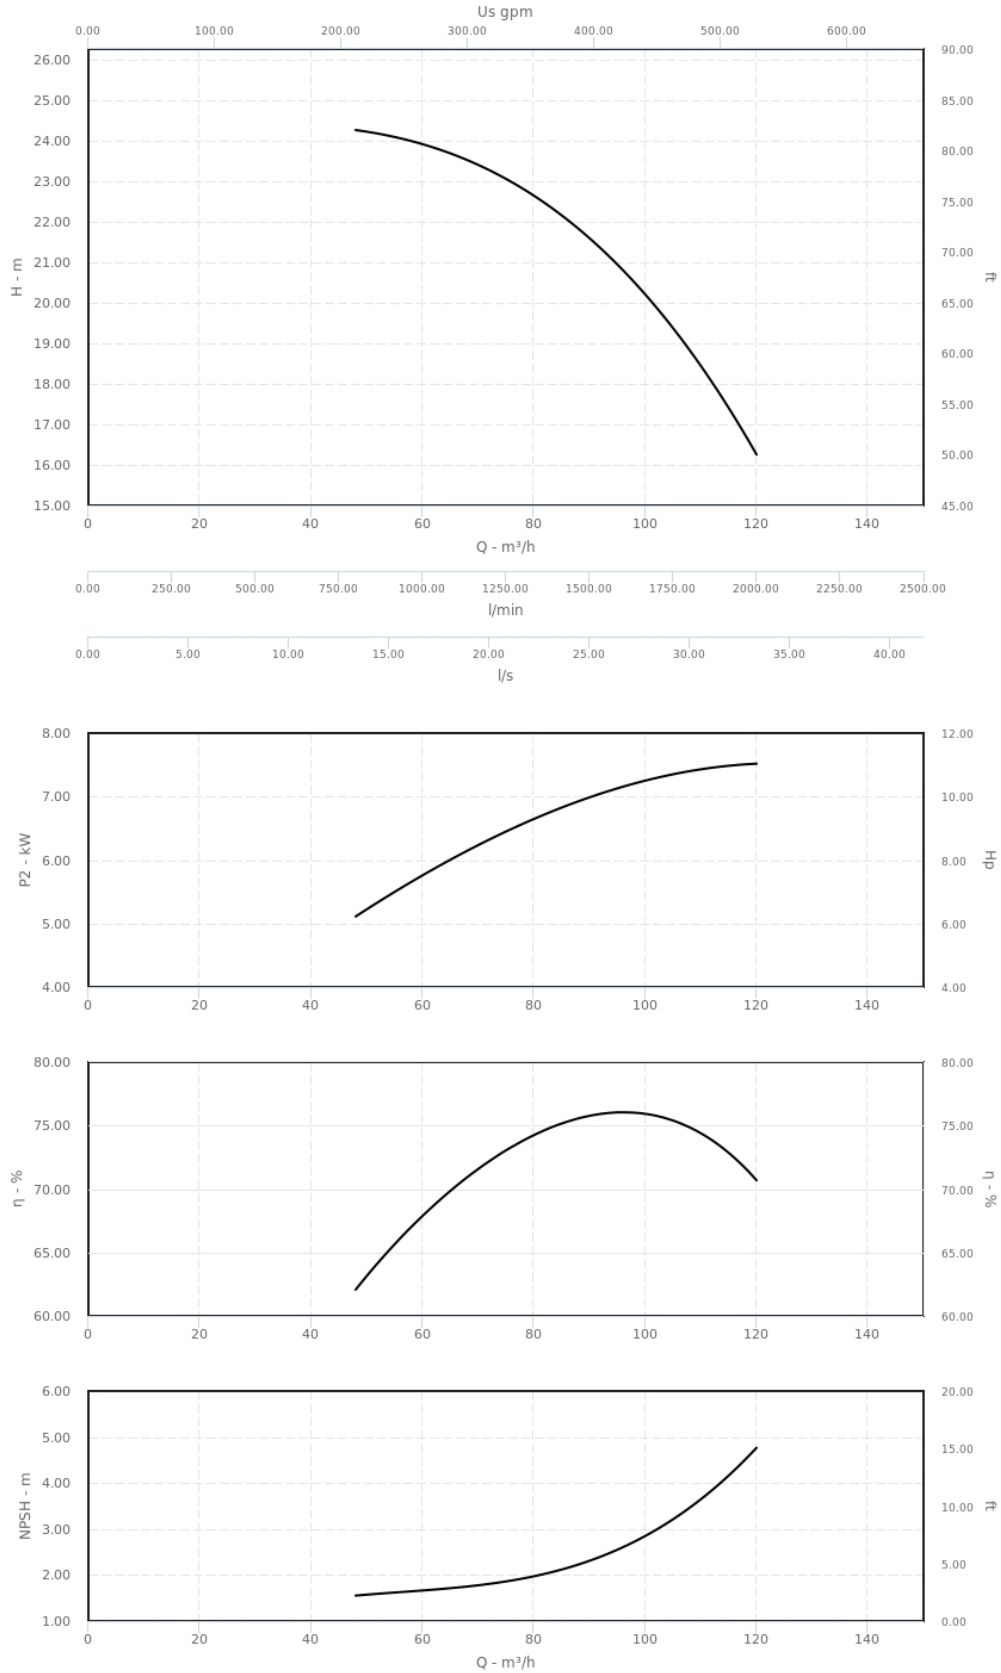

Data: 12/11/2020

60401523000: NM 65/16D/B

## DIMENSIONS (MM)

**dn1:** 80  
**dn2:** 65  
**a:** 100.00 mm  
**m1:** 125.00 mm  
**m2:** 95.00 mm  
**n1:** 280.00 mm  
**n2:** 212.00 mm  
**n3:** 49.00 mm  
**b:** 65.00 mm  
**l1:** 150.00 mm  
**l2:** 172.00 mm  
**g1:** 12.00 mm  
**h1:** 160.00 mm  
**h2:** 200.00 mm  
**w:** 320.00 mm  
**fM:** 525.00 mm

