


50Hz

# Flygt 2670

MEET THE NEW MEMBER OF YOUR DEWATERING TASK FORCE

**When water is your challenge, Flygt 2600 is your answer.**


With a comprehensive range of pumps to suit any task, the Flygt 2600 series is the solution used to get the job done in mining, construction, industrial or municipal applications all over the world. The Flygt 2600 series have reliability built-in with innovative ways of reducing wear on the impeller and seal.

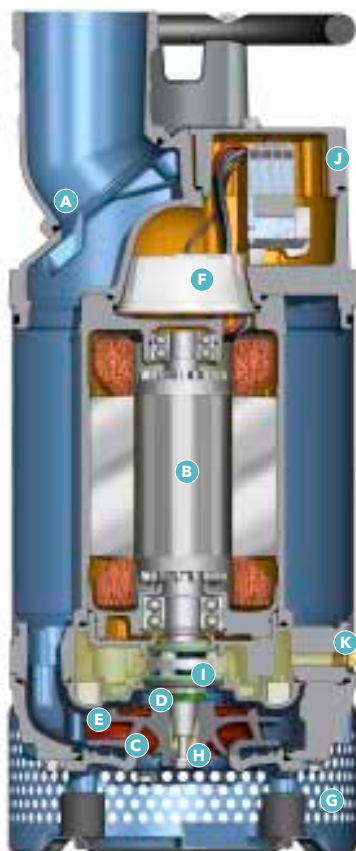

- A Air valve**  
The cooler the motor, the better the performance.
- B Class H motor**
- C Dura-Spin™**  
The unique closed impeller and the suction cover which reduces wear.
- D Spin-Out™**  
Protects the outer seal from abrasive particles.
- E Hard-Iron™ impeller and suction cover**
- F Sealed off terminal board**
- G Strainer bottom with shock absorbers**
- H Single impeller adjustment screw**
- I Aluminium Plug-in™ seal**
- J Inspection cover**
- K External inspection and oil plugs**

**FLYGT**  
a xylem brand

## Performance

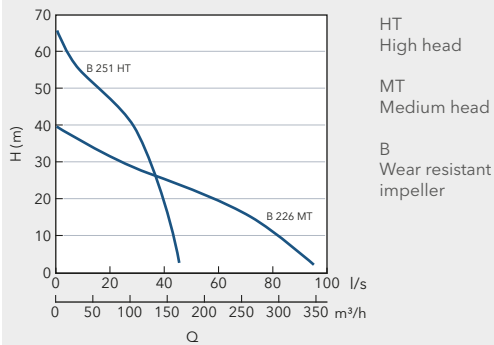

## Rating

18 kW / 3-phase / 2,895 rpm

Voltage V	Rated current A	Starting current A
220 D	58	355
240 D	55	390
380 D	34	239
380 Y	33	203
400 D	33	238
400 Y	32	215
415 D	32	222
440 D	32	238
500 D	26	187
525 D	24	153
550 D	24	162
660 Y	20	138
690 Y	19	137
1000 Y	14	99

## Denomination

Product code	2670.181
Installation	Portable
Discharge connection	3"/4"/6"
Impeller characteristics	High head/medium head (HT/MT), Wear resistant impeller (B) with Dura-Spin™

## Process data

Liquid temperature	40°C (standard)
Depth of immersion	max 20 m
Liquid density	max 1100 kg/m <sup>3</sup>
Strainer hole dimension	ø 12.0 mm
The pH of the pumped liquid	pH 5-8

## Motor data

Frequency	50 Hz
Insulation class	H, 180°C
Voltage variation	max ± 10% - continuously running max ± 10% - intermittent running
Voltage imbalance	max 2% - between phases max 30 - No. of starts/hour

## Monitoring equipment

Thermal contacts	140°C opening temperature
------------------	---------------------------

## Cables

SUBCAB®	SUBCAB® Submersible cable
---------	---------------------------

## Materials

Outer casing	Stainless steel
Impeller	Hard-Iron®
Wear parts	Nitrile rubber/Hard-Iron®
Stator housing	Aluminum
Strainer	Stainless steel
Shaft	Stainless steel
O-rings	Nitrile rubber
Discharge connection	Aluminium

## Mechanical face seals

Inner Active Seal™	Tungsten carbide/Tungsten carbide
Outer	Tungsten carbide/Tungsten carbide

## Weight and dimensions

Weight (excl. cable)	132 Kg
Height	955 mm
Width	ø 395 mm

## Options

Warm liquid version	Warm liquid version max 70°C
---------------------	------------------------------

Quick couplings

Starters

Softstarter

## Accessories

Tandem connections, hose connections and floating rafts. Electrical accessories such as pump controllers, control panels and monitoring relays. Zinc anodes.

**xylem**  
Let's Solve Water

XYLEM  
Gesällvägen 33  
174 87 Sundbyberg, Sweden  
Tel +46 8 475 60 00  
www.xylem.com  
www.flygt.com

© 2013 Xylem, Inc. All rights reserved. Flygt is a trademark of Xylem Inc. or one of its subsidiaries.

Environmental Product  
Declaration  
EPD-declared product

