

**General Data**

Model:	COMPATTA EVO 55 M
Code:	2001054
Series:	Compatta
Weight [Kg]	23.80
Submersible pump for sewage with suspended solids	

**Hydraulic**

Impeller Type:	Vortex Impeller
Delivery DN [mm]:	G 2"
Input DN [mm]:	50
Free Passage [mm]:	50
Impeller Ø [mm]:	120
Max Pump Efficiency [%]:	31.60
Global Efficiency [%]:	22.34
Head [m]:	8.86
Flow [m <sup>3</sup> /h]:	18.00

*Tolerance according to ISO 9906:2012 3B2*

**Features**

Upper Meccanical seal:	CA/CE/Viton
Lower Meccanical Seal:	SIC/SIC/Viton
Upper Bearing:	Single raw ball bearing
Lower Bearing:	Single raw ball bearing
IP Protection:	IP68
Motor protection:	present
Humidity sensor:	not present
ATEX:	not present
Applied Paint:	Two component water-based paint
Cable Length [m]:	10
Lubricating Oil:	Q8 WF15
Oil Quantity [Kg]:	0.24

**Materials**

Pump:	Cast Iron EN 1561 EN-GJL-200
Impeller:	Cast iron EN 1561 EN-GJL-200
Motor shaft:	Stainless steel AISI 420
Cooling Jacket:	Not available
Screw:	Stainless steel A2-70
Cable:	H07RN8F

**Pumped Liquid**



Pumped Liquid:	Sewage
Density [Kg/dm <sup>3</sup> ]:	1.1
pH:	6-10
Temperature Range:	0-40°C

**Installation**

Maximum depth of immersion [m]:	20
Cooling Type:	The cooling of the motor is ensured by the surrounding liquid
Installation:	Vertical/Horizontal
Floating on board machine:	not present




Attention: pictures for illustrative purposes

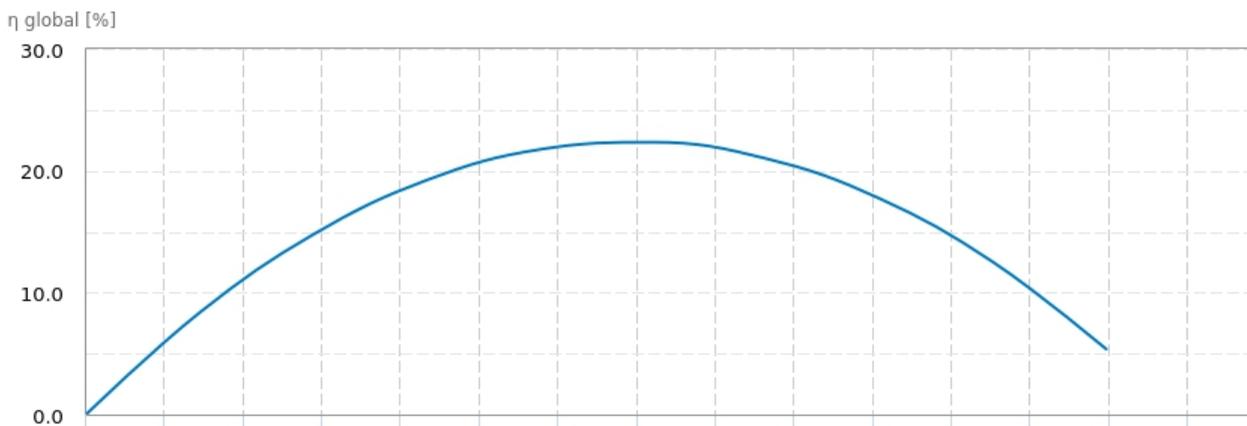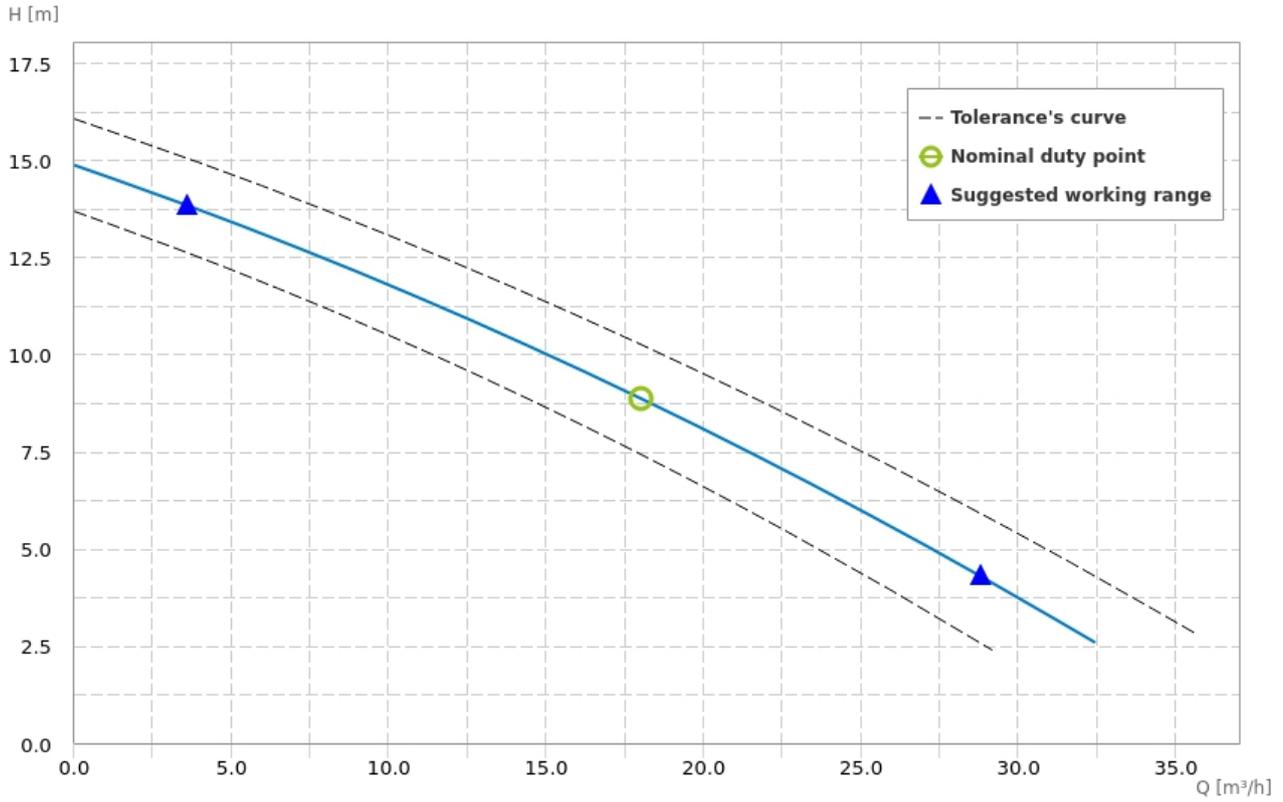

**Motor**

Motor code:	3520180220
Power P1 [kW]:	2.19
Power P2 [kW]:	1.50
Phases:	1
Frequency [Hz]:	50
Tension [V]:	230
Nominal current [A]:	9.9
Starting current [%]:	232.0
Power Factor:	0.94
R.P.M.:	2850
Starting:	D.O.L
Capacitor [ $\mu$ F]:	32.0
Insulation Class:	F 155°C
Service type:	S2
Max Efficiency [%]:	77.20
Max Efficiency at full load [%]:	68.5
Efficiency at $\frac{3}{4}$ load [%]:	70.0
Efficiency at $\frac{1}{2}$ load [%]:	70.0
Efficiency class:	-

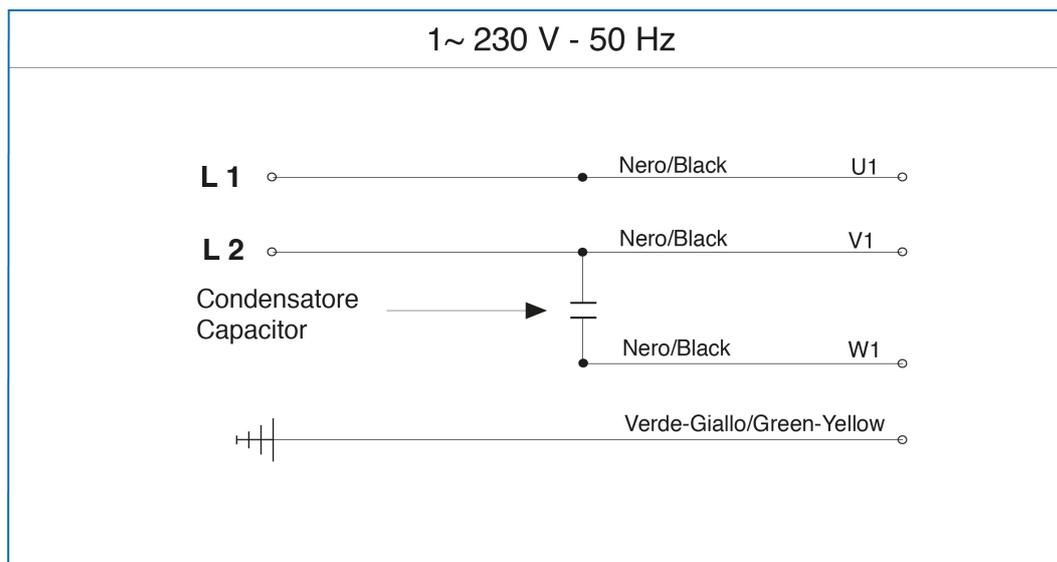**Wiring diagrams**

Dimensions drawing

