



Company: UAB Vandens siurbliai

CREATED BY: ***

email: arturas@siurbliai.lt

Phone number: ***

Data: 04/07/2024

Model code: 6040024201000

Data: NM 32/20C-60/A

PUMP DATA:

H max (m): 45.00

H min (m): 34.00

Q min (mc/h): 6.60

Q max (mc/h): 16.80

Impeller diameter (mm): 0.00

N. of impellers: 1

Max working pressure (bar): 0

PF: 0

Min liquid temperature (°C): -10.00 °C

Weight (kg): 48,60

MOTOR DATA:

n (rpm): 3450

Pn (kW): 3.00

Pn (HP): 4.00

Motor type: IM

Motor phase: 3~

Un (V): 220/380

fn (Hz): 60

Poles: 2

In (A): 13.4 / 7.7

Insulation class: F

Duty: S1

IE: IE3-88.5

ingress protection (IP): IP 54

MATERIALS:





Pump Casing: Cast iron GJL 200 EN 1561

Lantern Bracket: Cast iron GJL 200 EN 1561

Impeller: Brass P-Cu Zn 40 Pb 2 UNI 5705

Shaft: Chrome steel 1.4105 EN 10088 (AISI 430F)

Mechanical Seal: Carbon-Ceramic-NBR

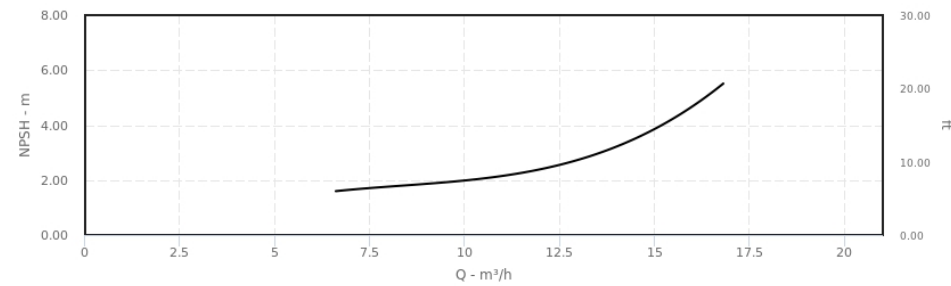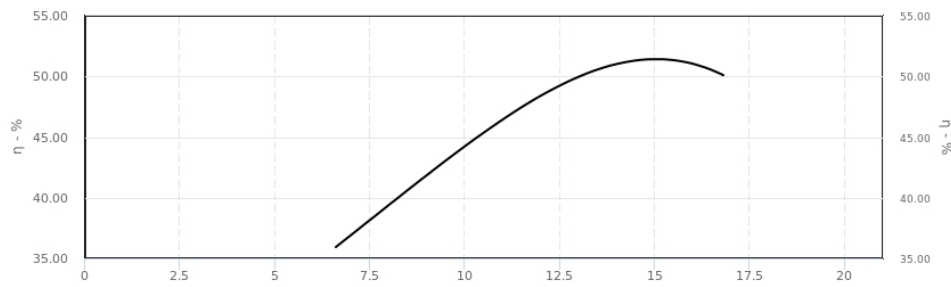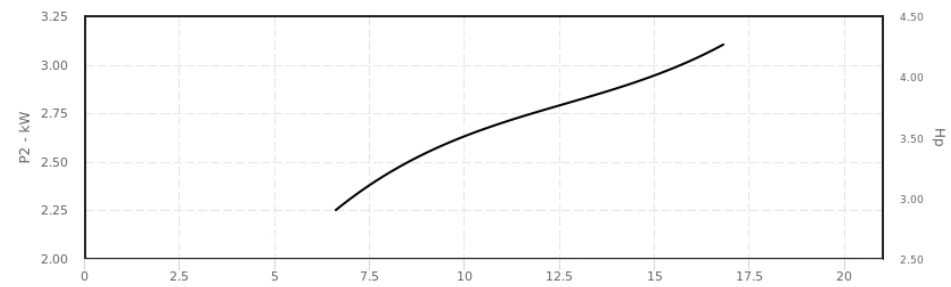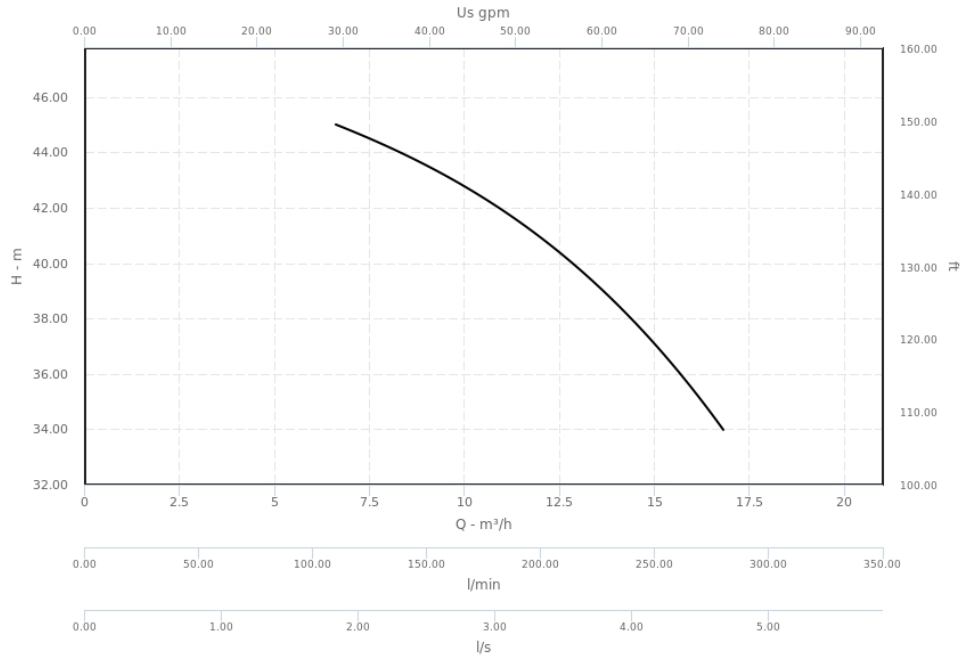

Dimensions (mm)

- dn1:** 50
- dn2:** 32
- a:** 80.00 mm
- m1:** 100.00 mm
- m2:** 70.00 mm
- n1:** 240.00 mm
- n2:** 190.00 mm
- n3:** 37.00 mm
- b:** 50.00 mm
- fM:** 479.00 mm
- s1:** 14
- l1:** 140.00 mm
- l2:** 140.00 mm
- g1:** 12.00 mm
- h1:** 160.00 mm
- h2:** 180.00 mm
- h4:** 2.00 mm
- HD:** 300.00 mm
- w:** 297.00 mm

