



SMART Digital S DDA-C


DDA ≤ 30 l/h (8 gph)




DDA-C I&O



net.grundfos.com/qr/i/92881338

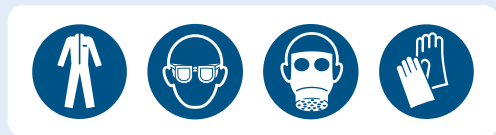

Min. / Max.
-10 °C / +45 °C
14 °F / 113 °F

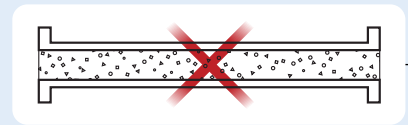

Min. / Max.
0 °C / +45 °C
32 °F / 113 °F



≤ 60 dB(A)



IP65
(Enclosure type 4X)














100-240 V,
50/60 Hz





DDA-C I&O

net.grundfos.com/qr/i/92881338

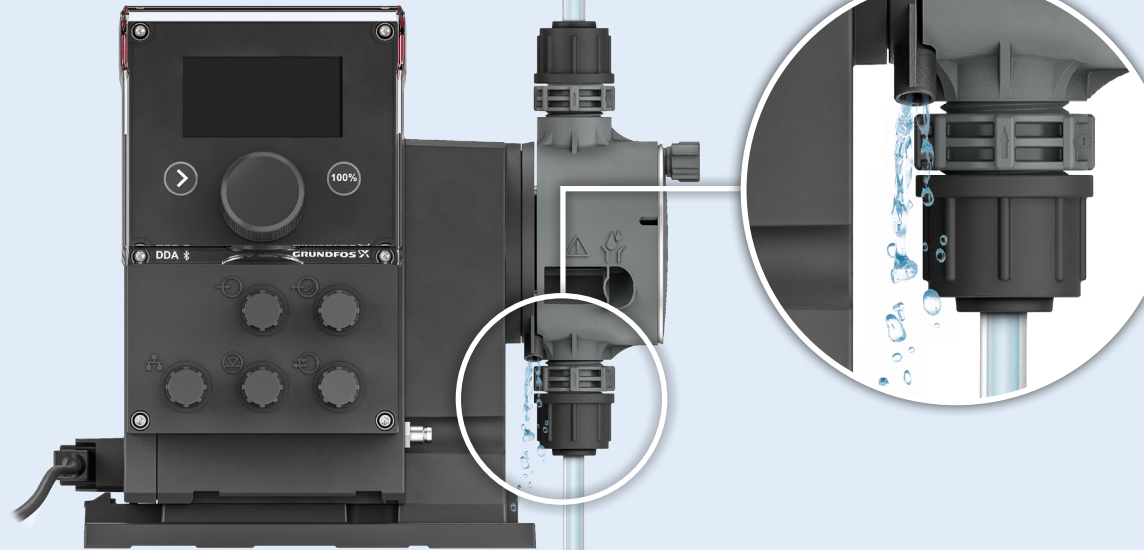







SDS







§





5

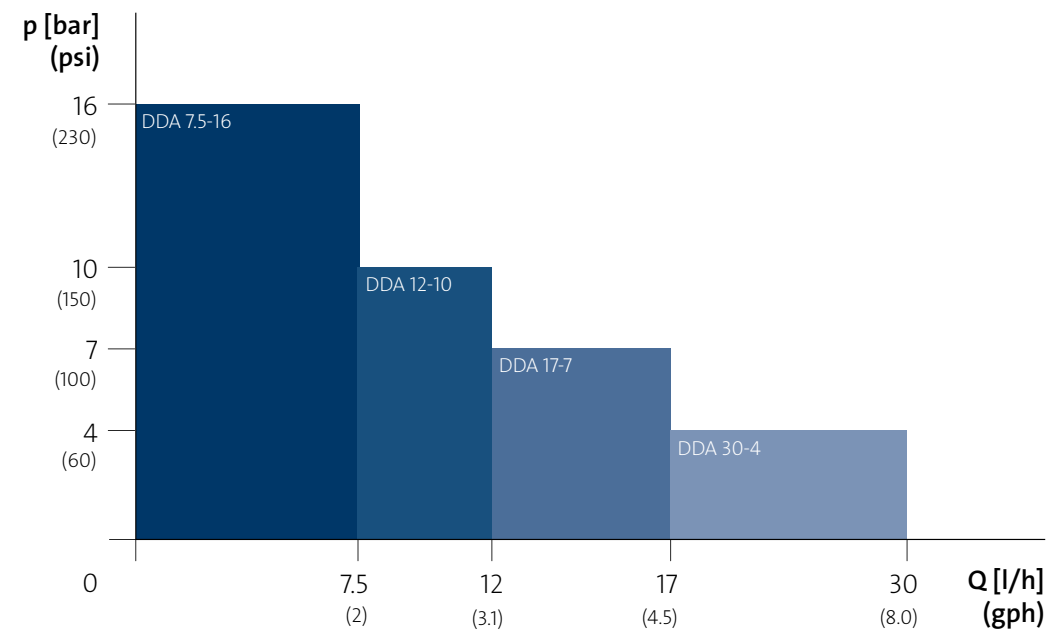

$p_2 - p_1 \geq 1 \text{ bar (15 psi)}$






100-240 V,
50/60 Hz





Max. 1.5 m / 59"



Min. 100 mm / 4"



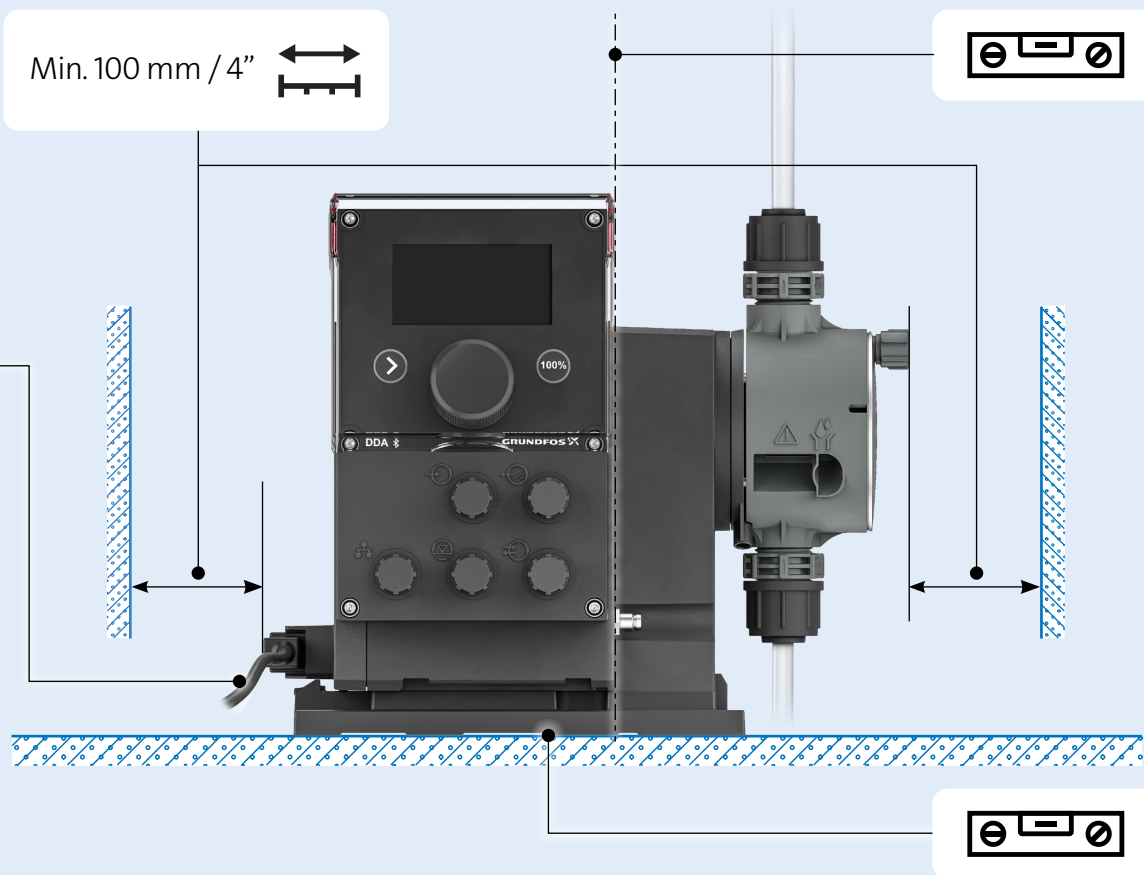


Max.
4 kg / 8.8 lb

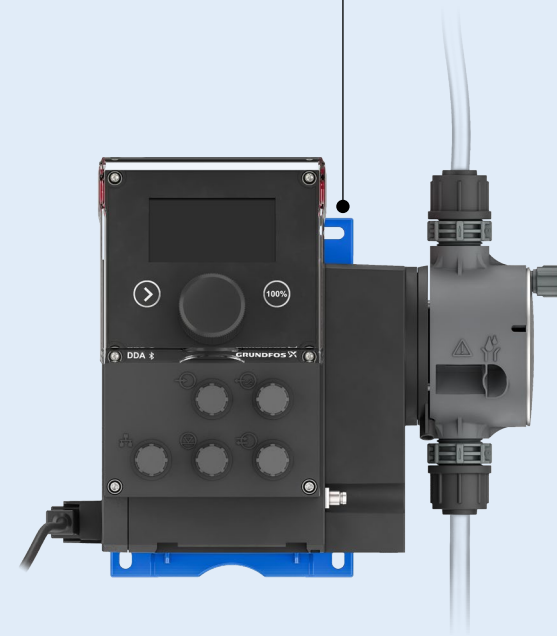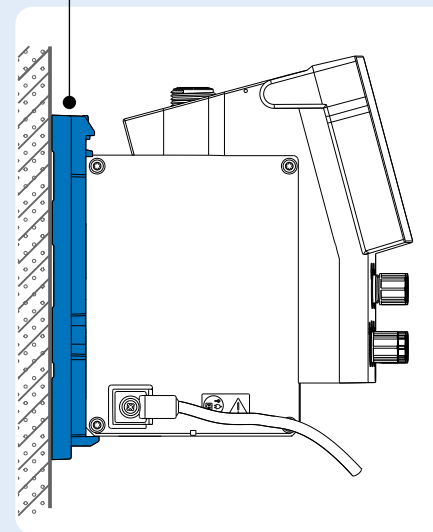




1a

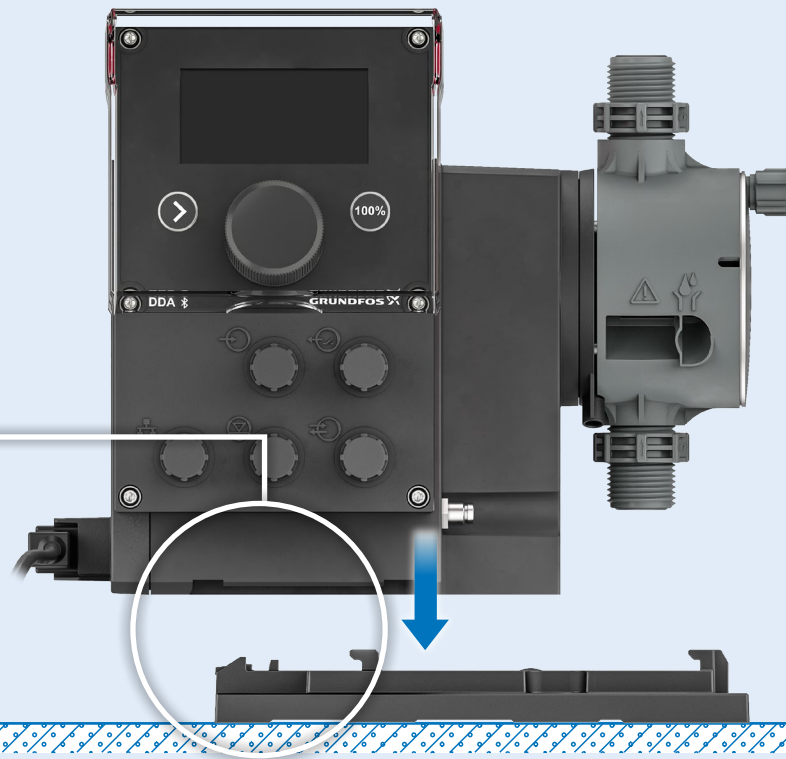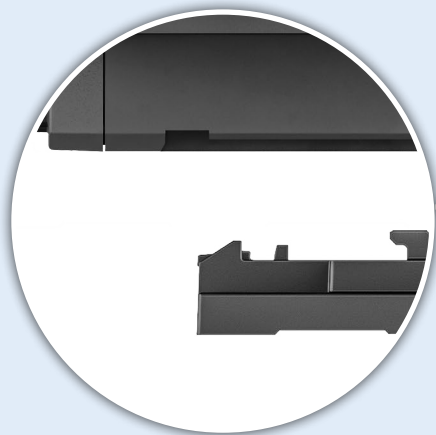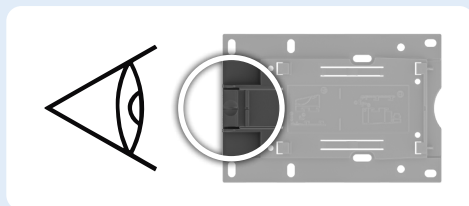


2a







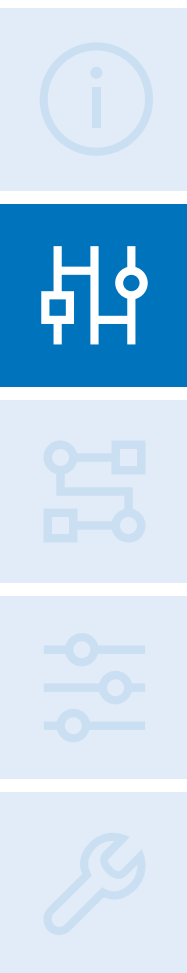



1b

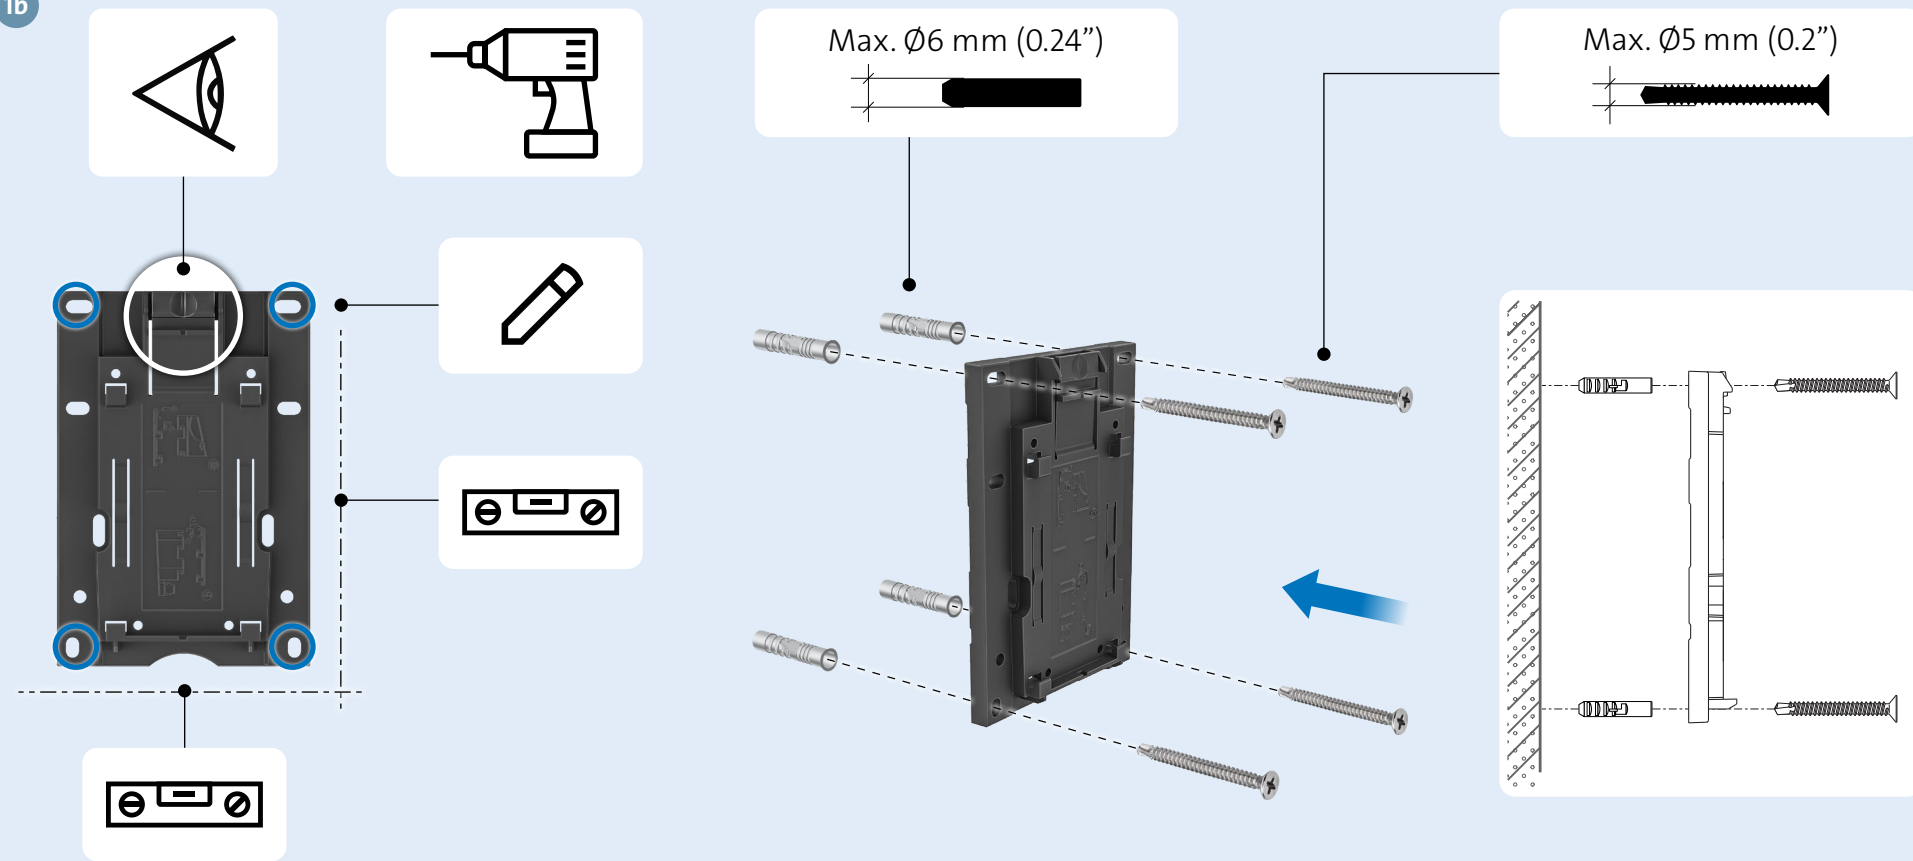

2b

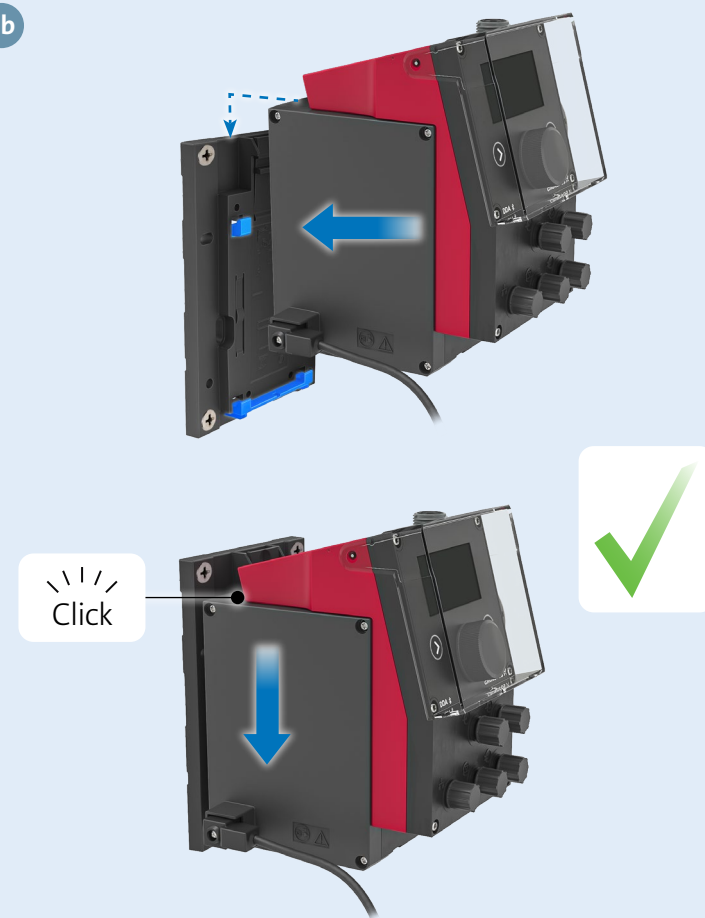

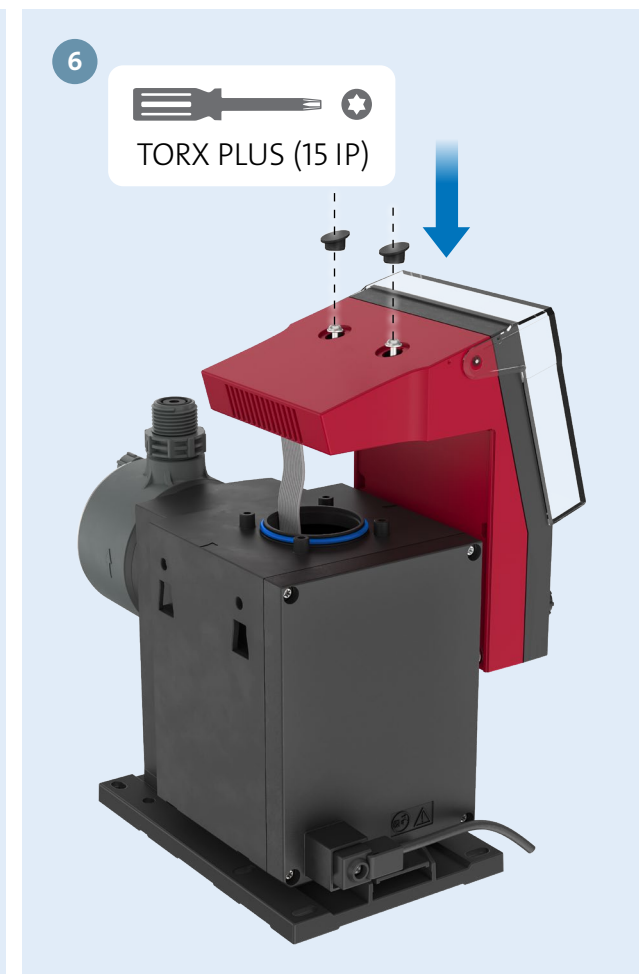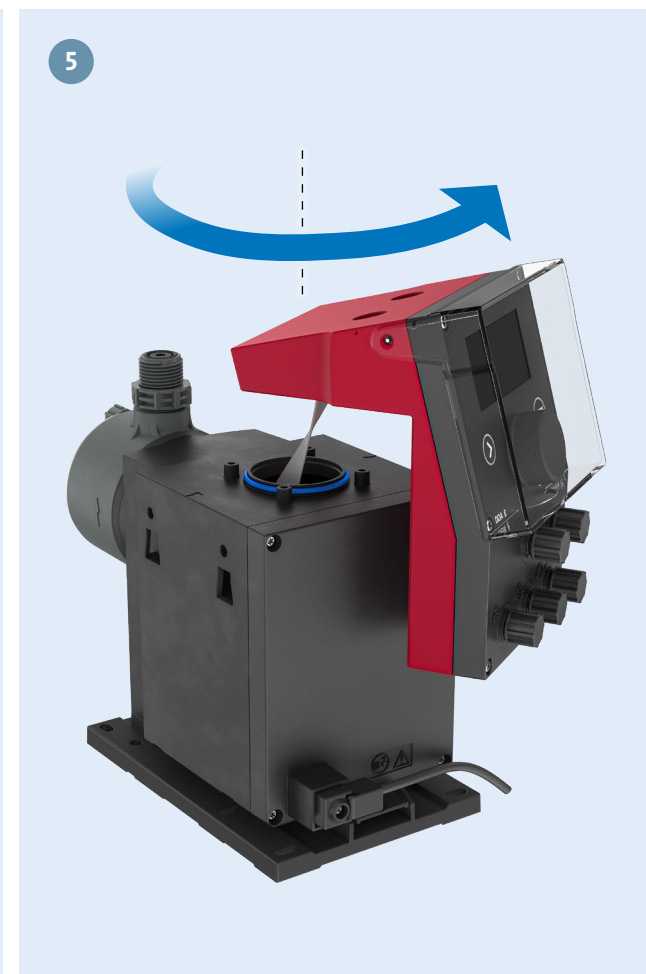
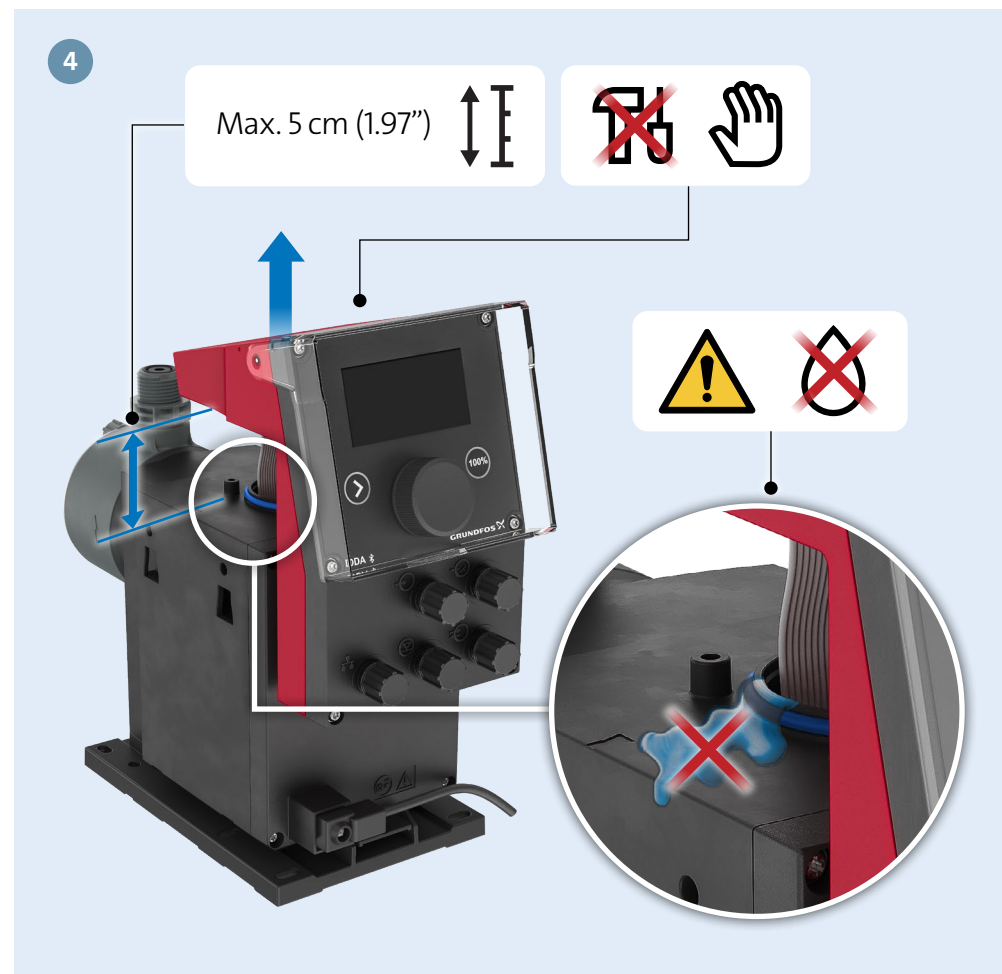
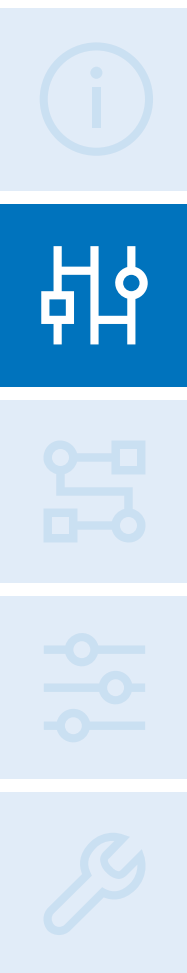


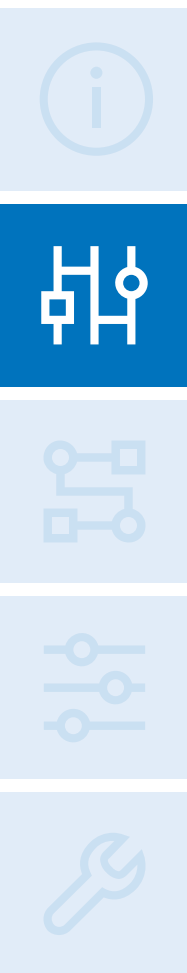






7






8

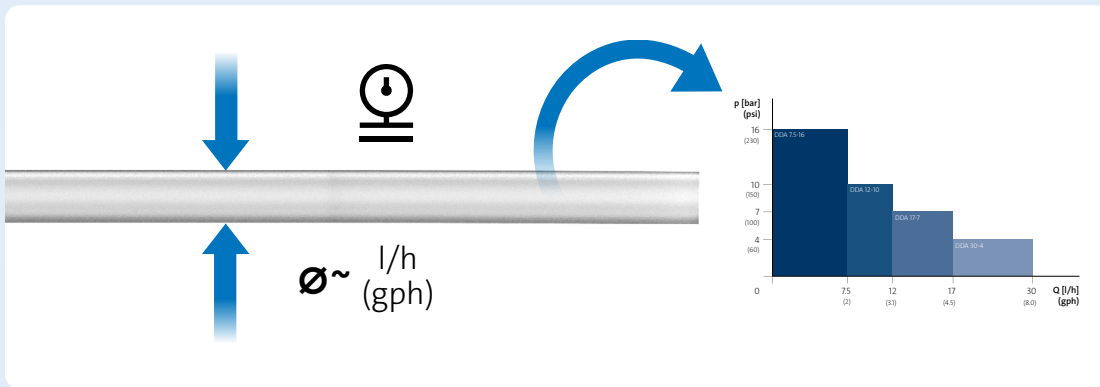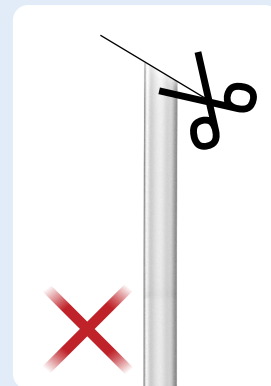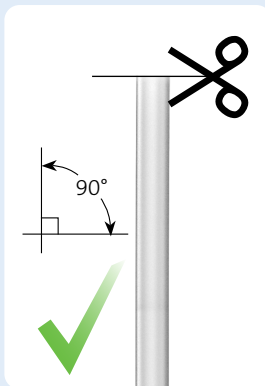

9



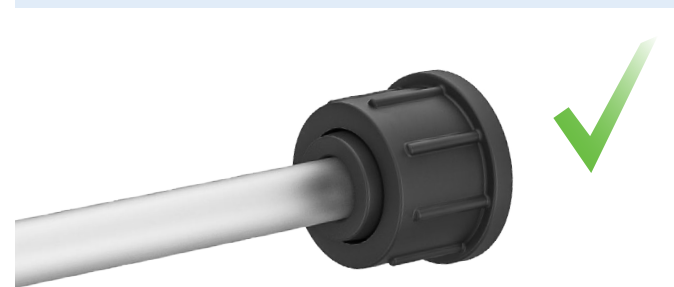
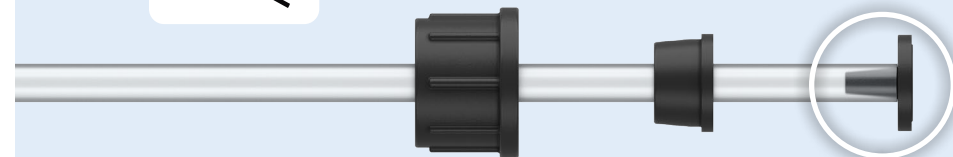

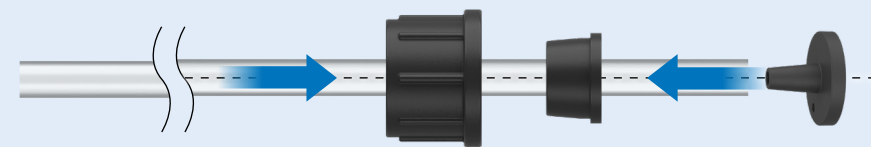


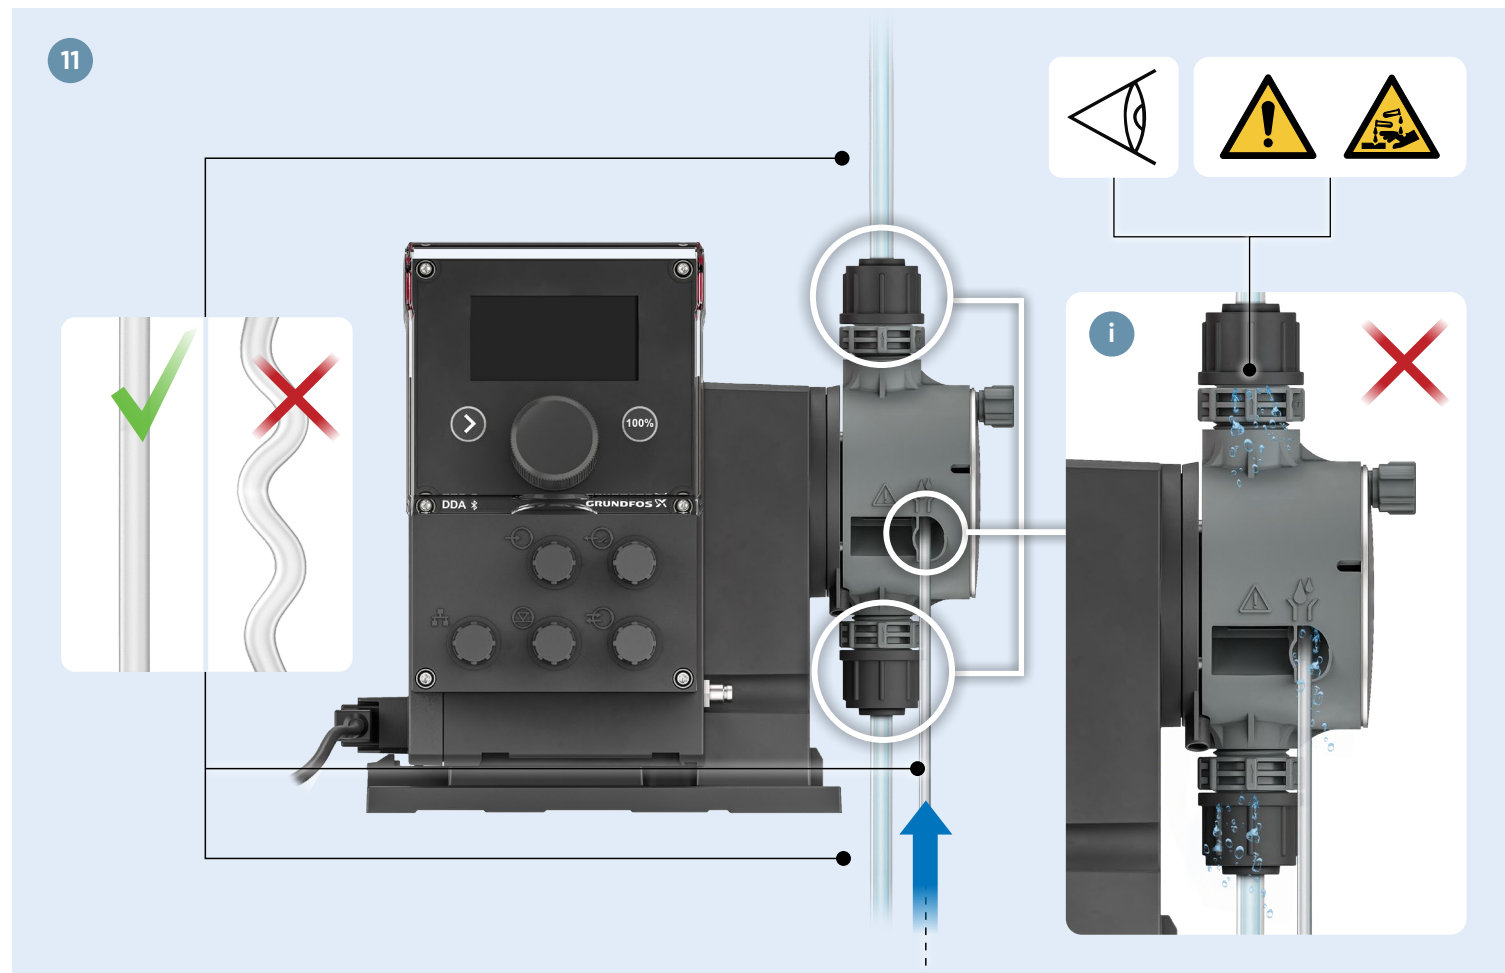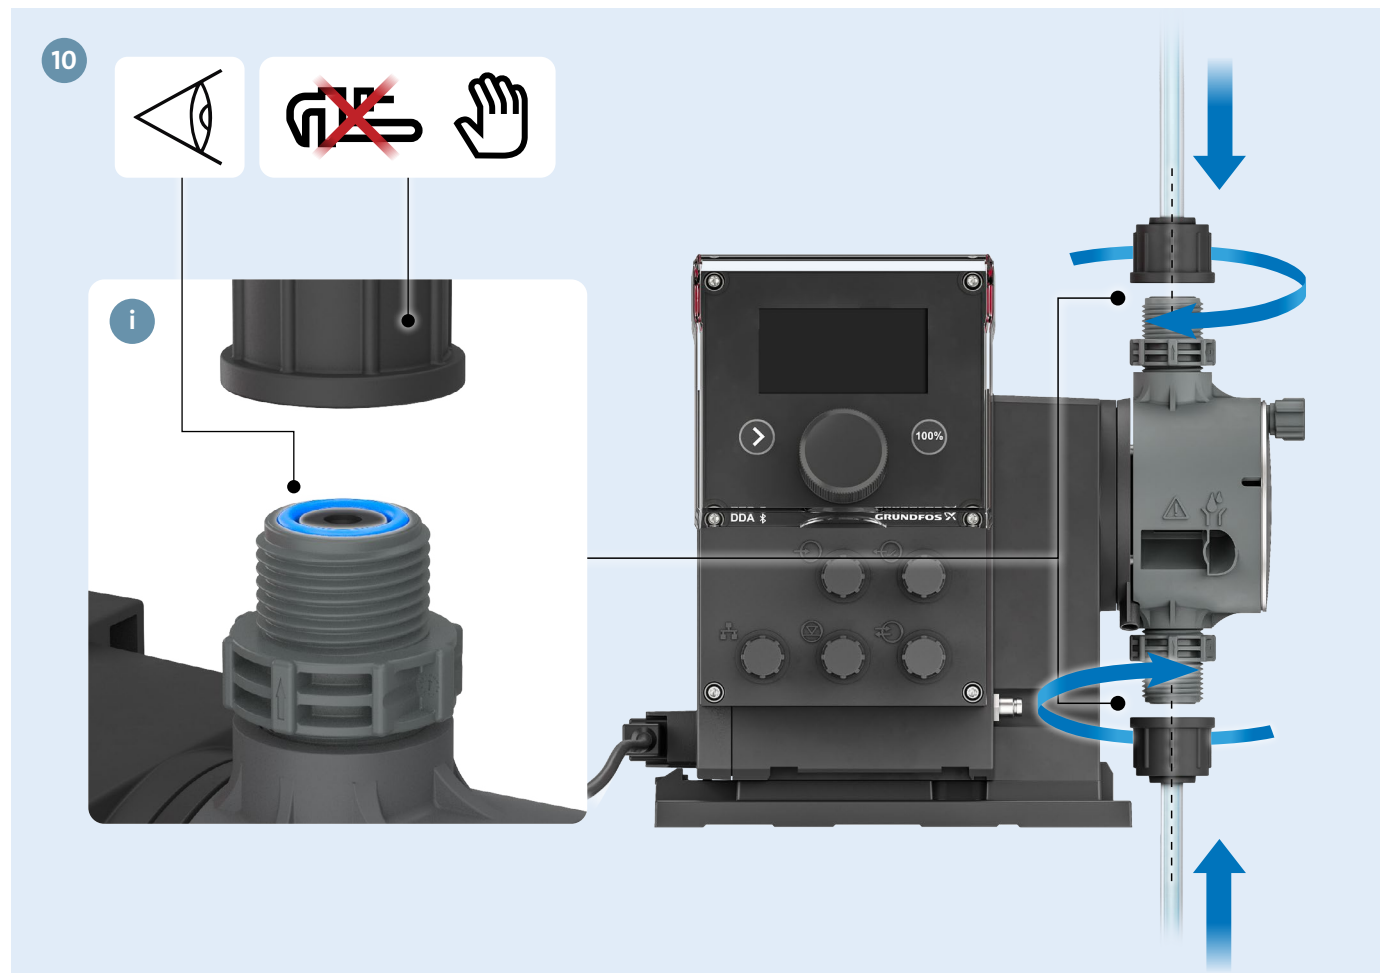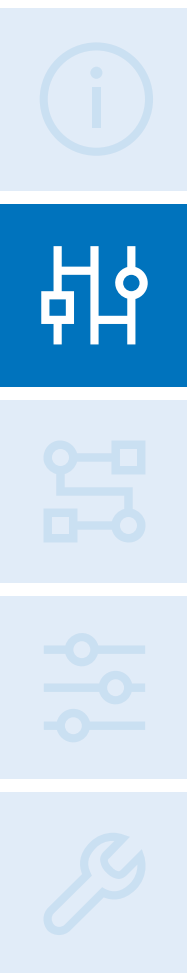

12





100-240 V,
50/60 Hz

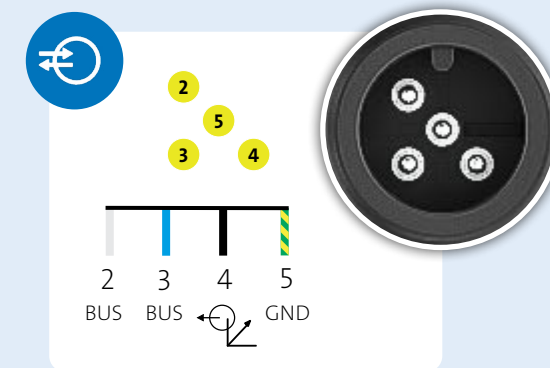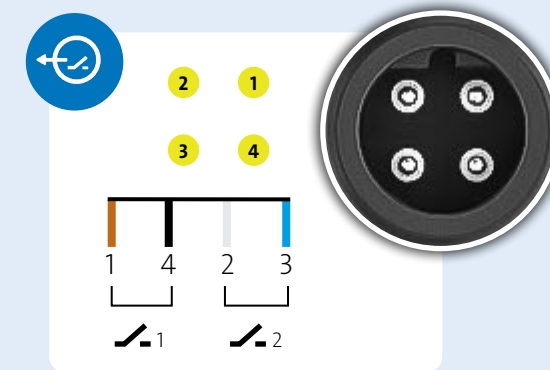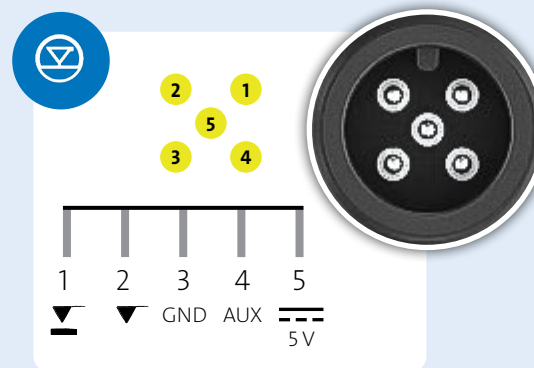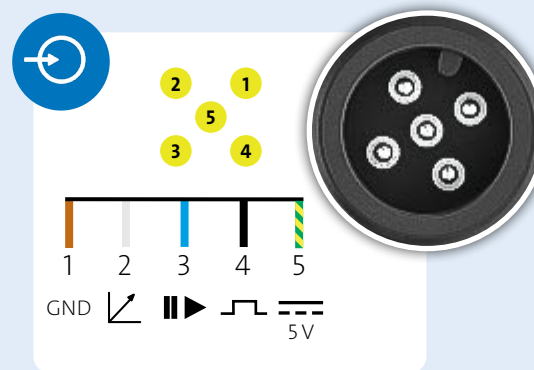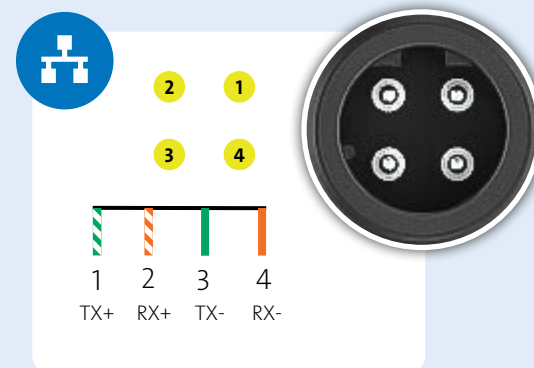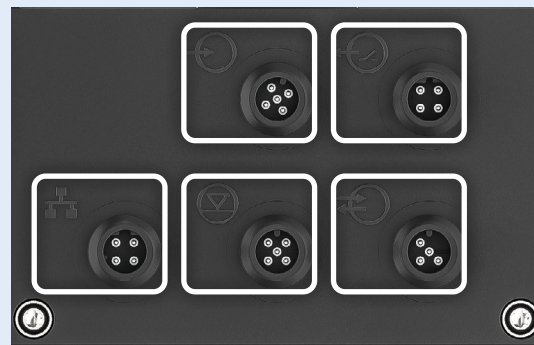




13




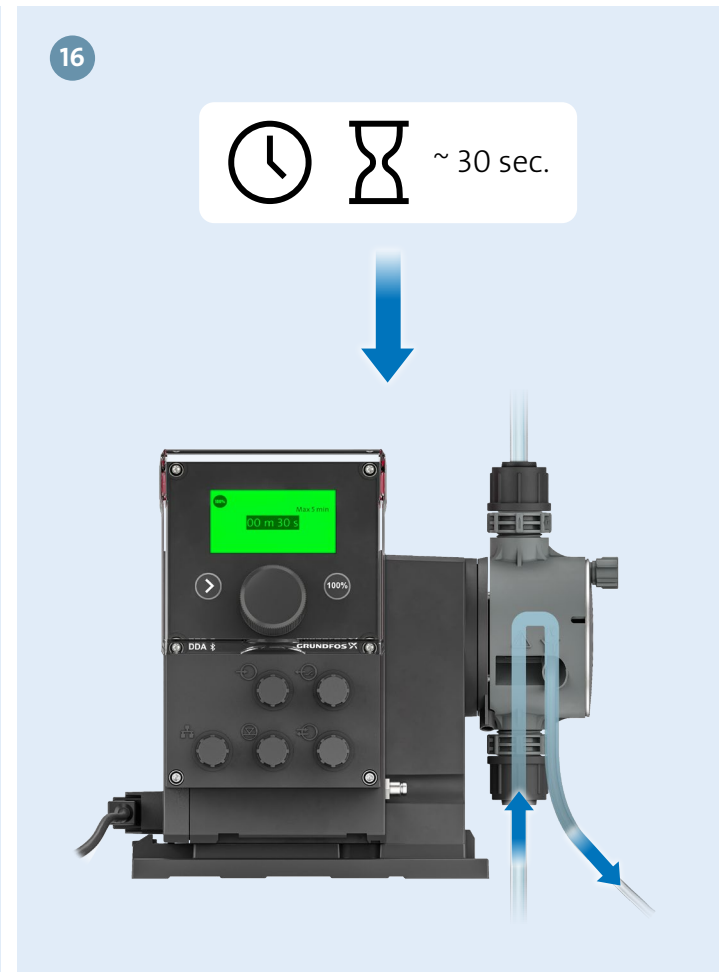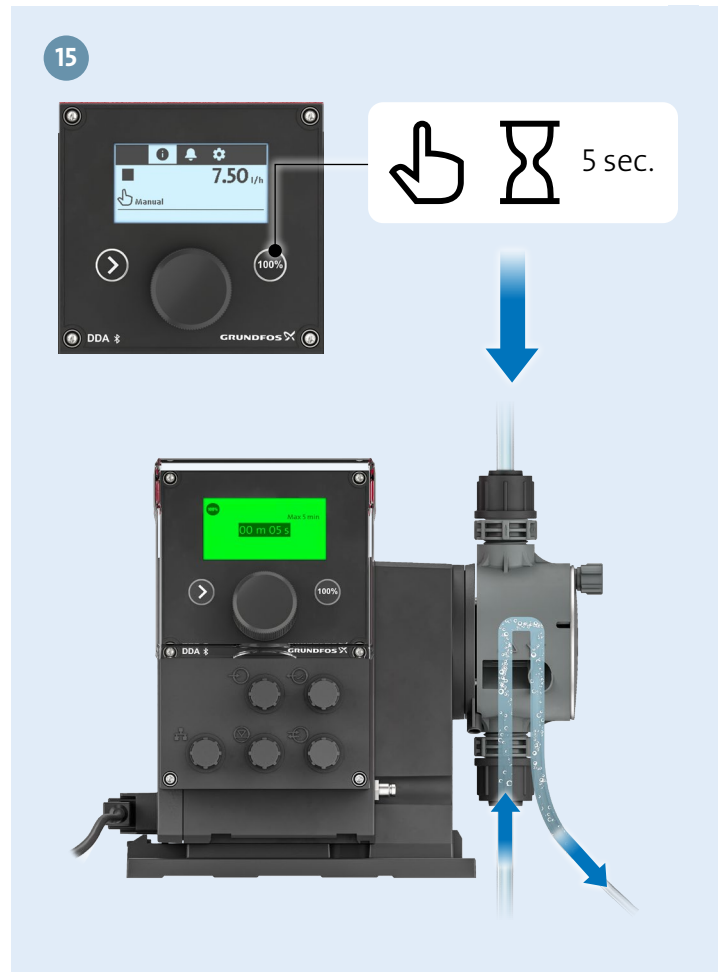


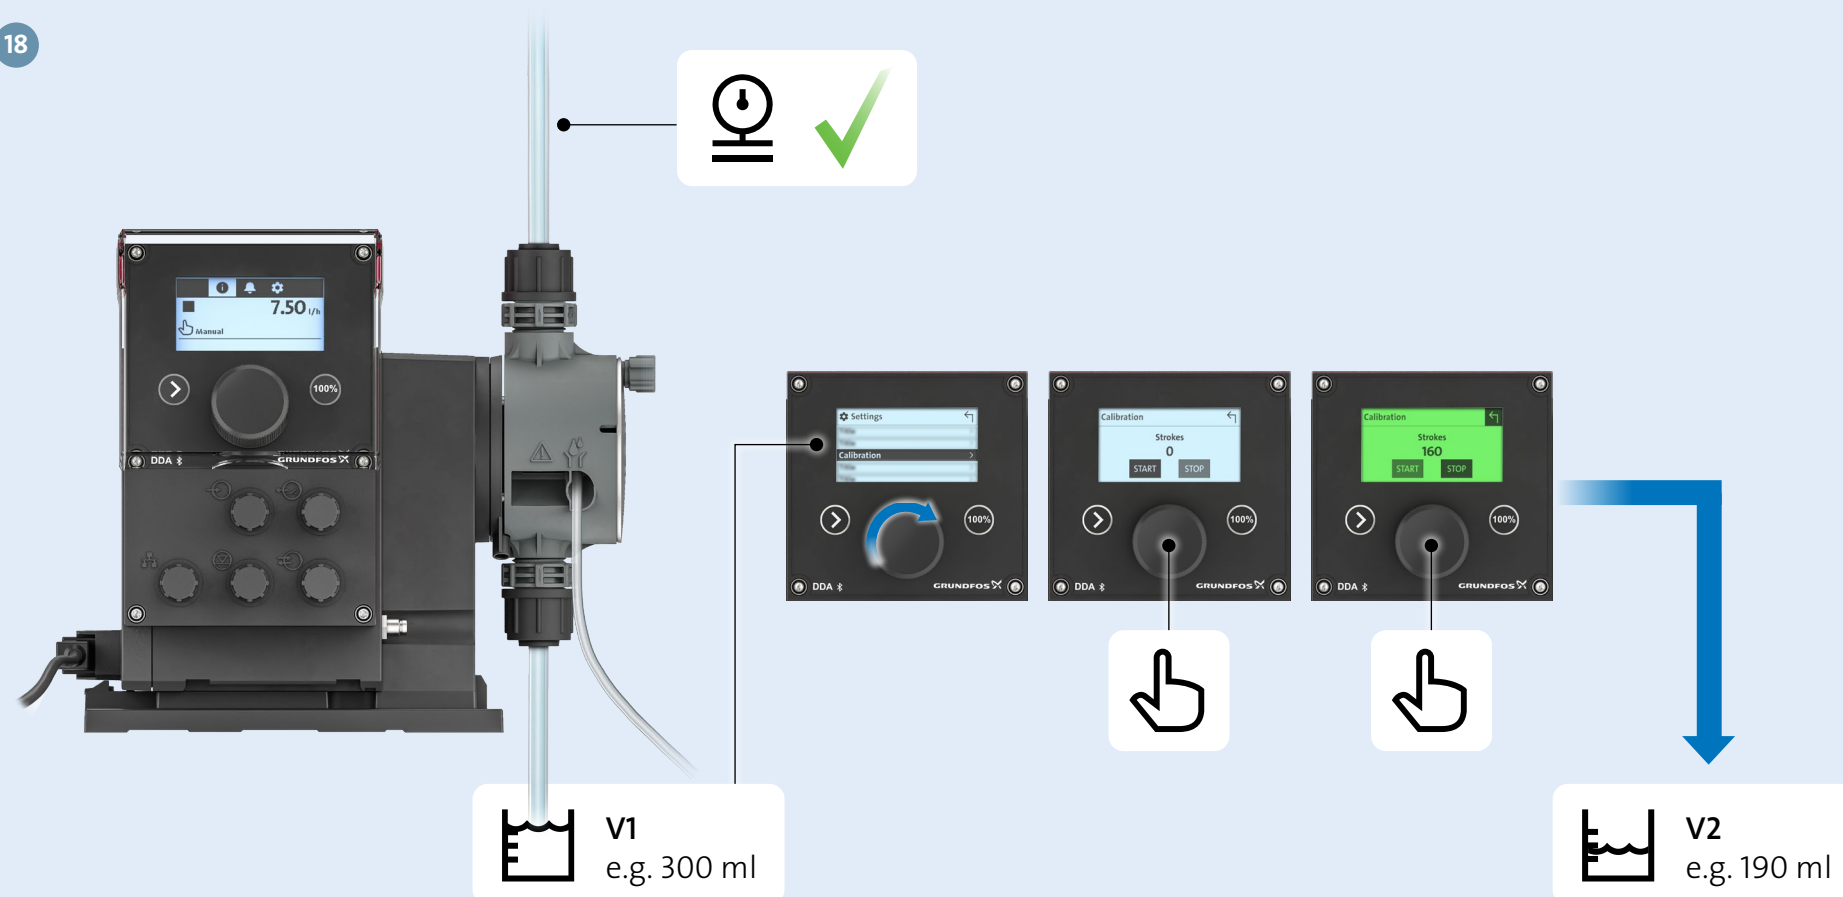



V1 - V2

e.g. 300 - 190 = 110 ml

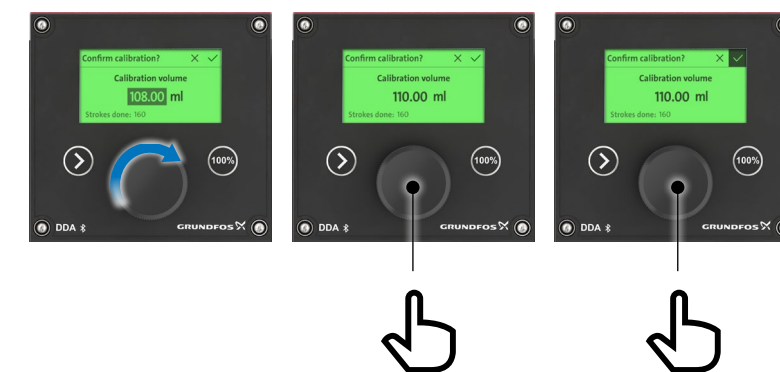

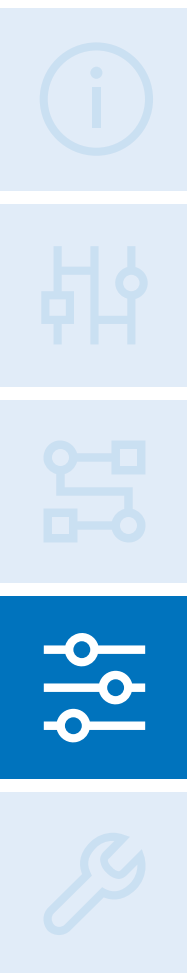

19





Available on the
App Store



GET IT ON
Google play

Android is a trademark of Google Inc



GO





1




PN:
97XXXXXX













2



= 0 bar (0 psi)

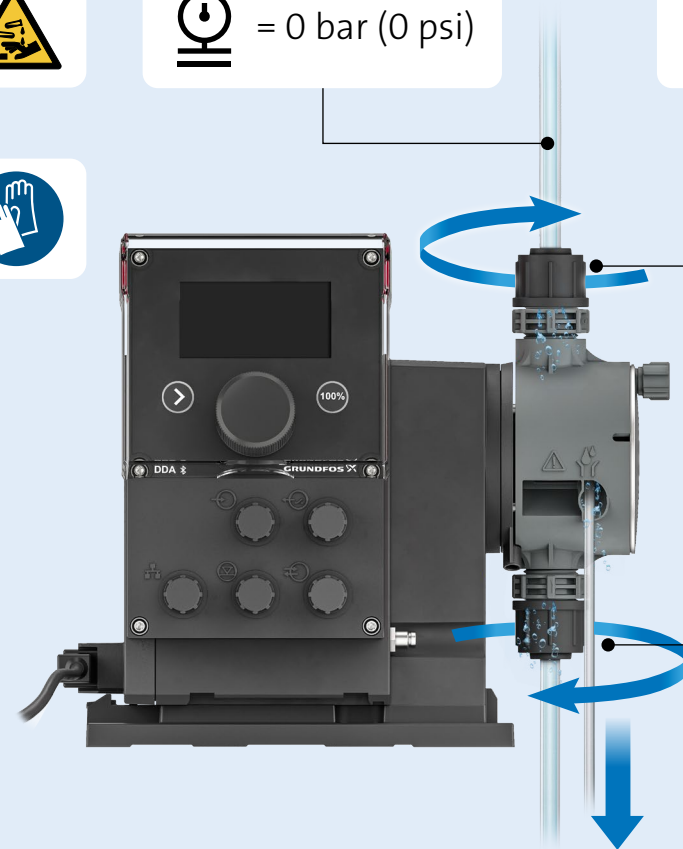

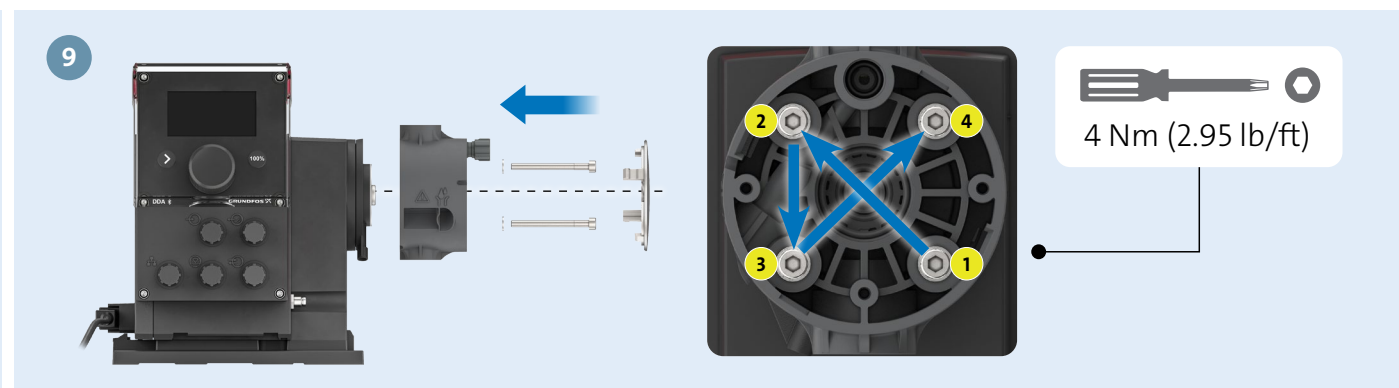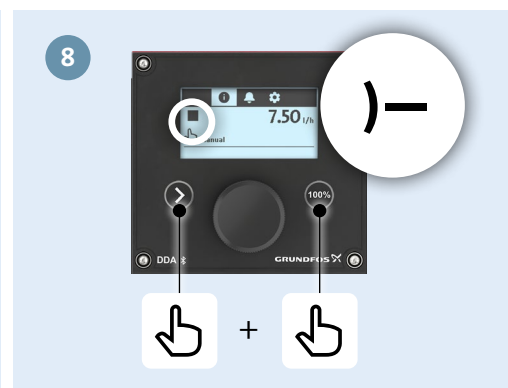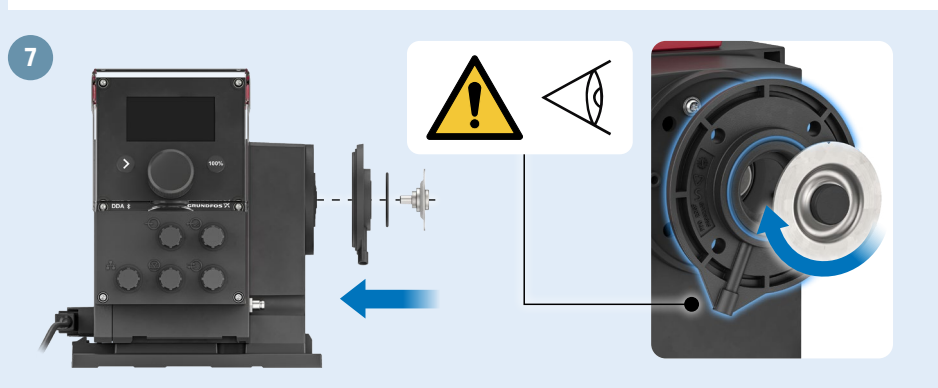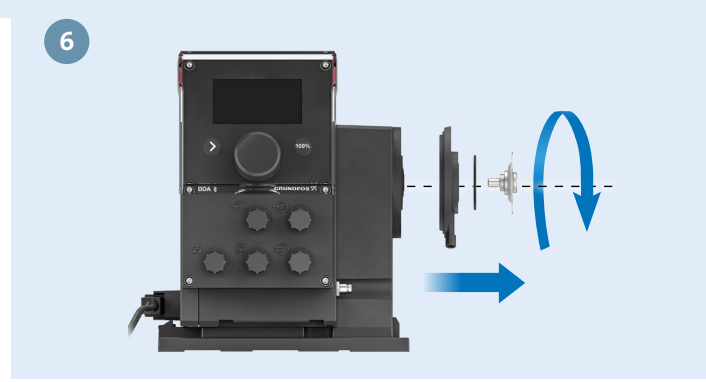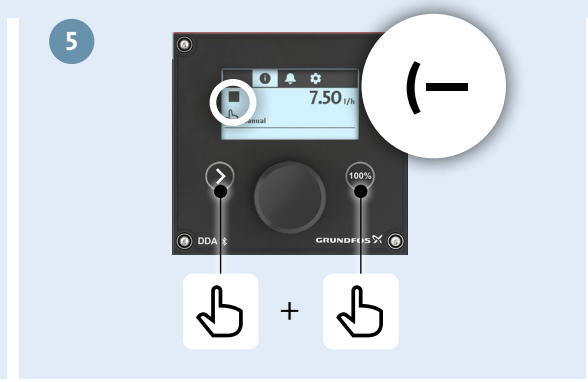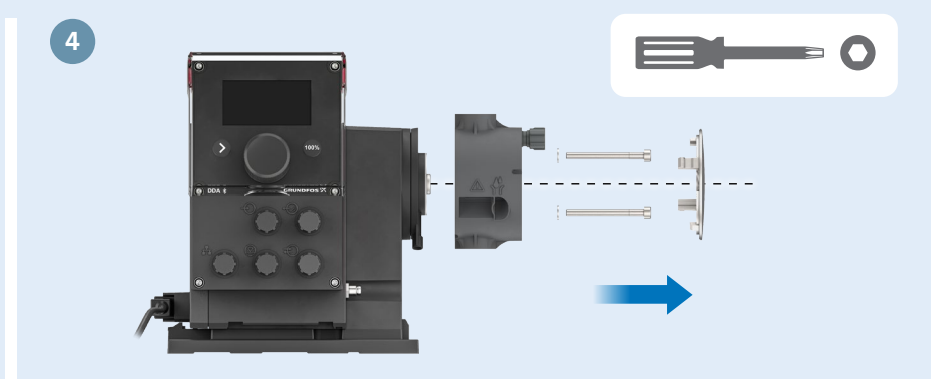

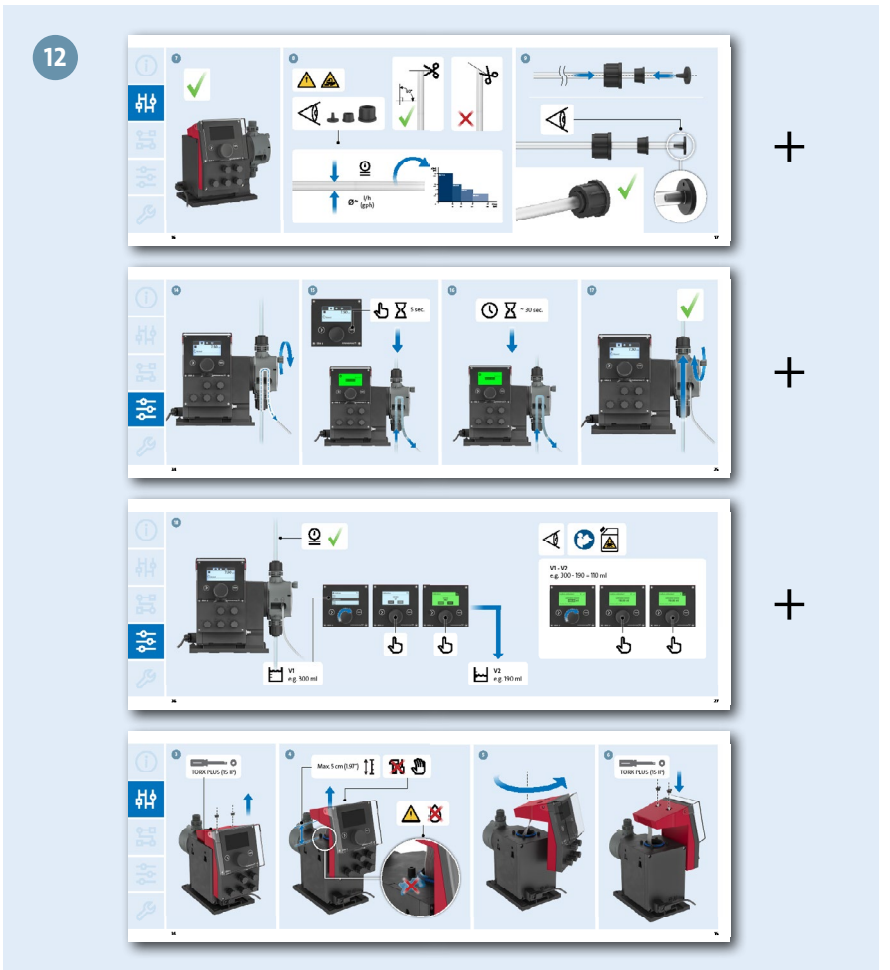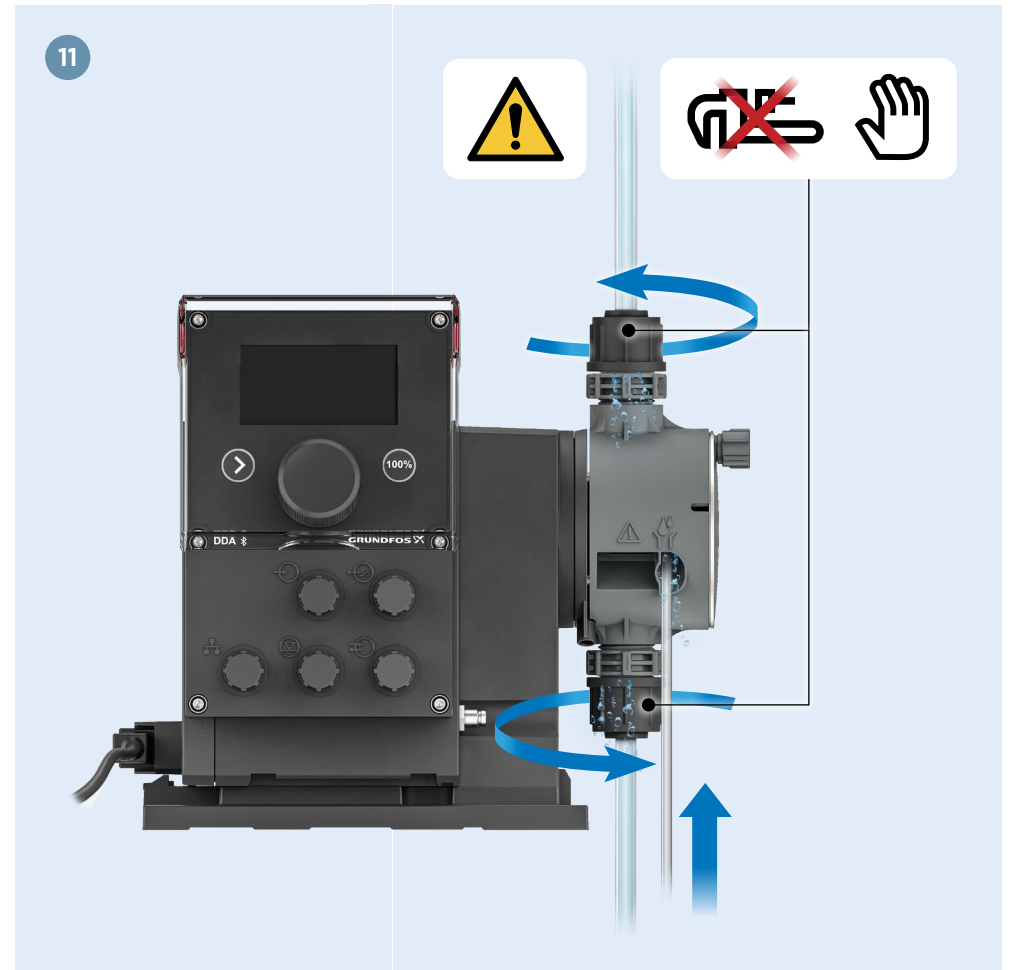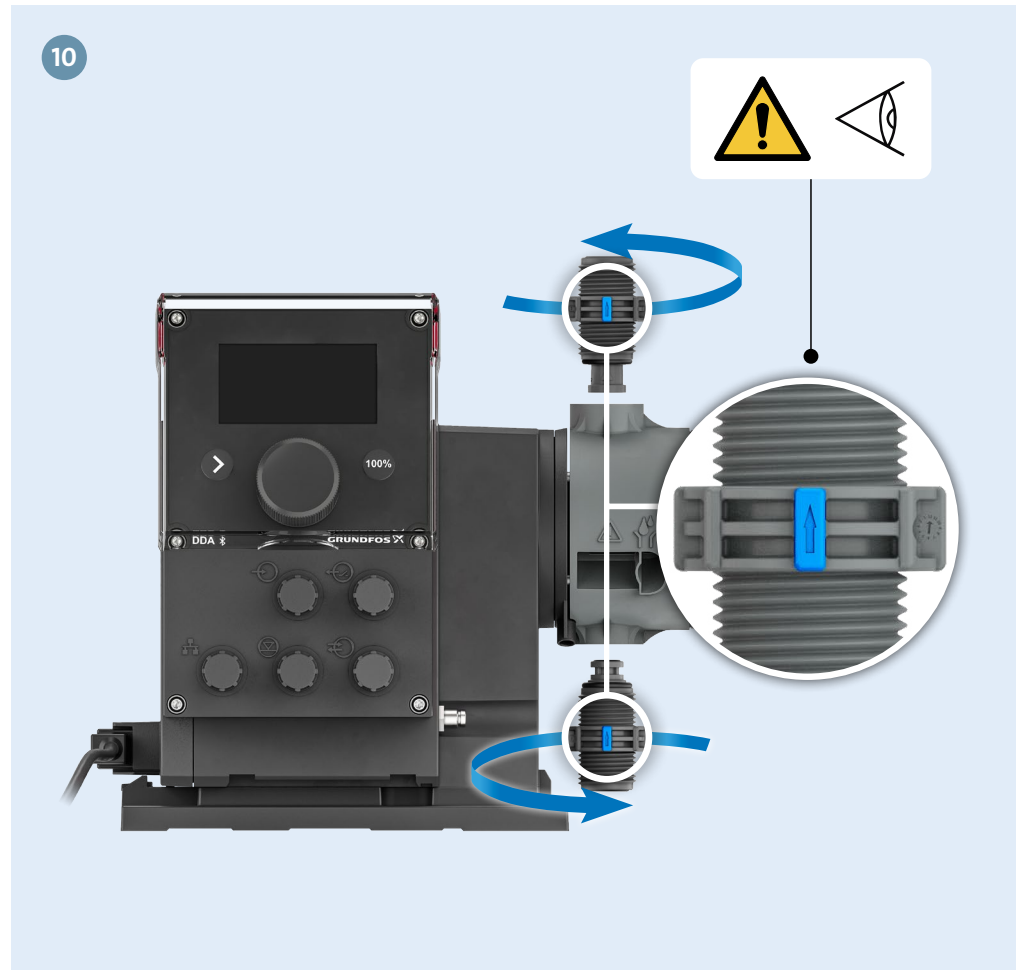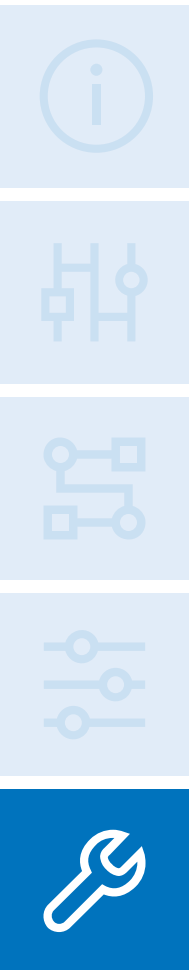



92881337 04.2025

ECM: 1415915

GRUNDFOS Holding A/S
Poul Due Jensens Vej 7
DK-8850 Bjerringbro
Tel: +45 87 50 14 00
www.grundfos.com

GRUNDFOS