


Receiver

From

Company
Reference
Address
Phone
Fax
E-mail

CP2 50-1800 T

Curve tolerance according to ISO 9906

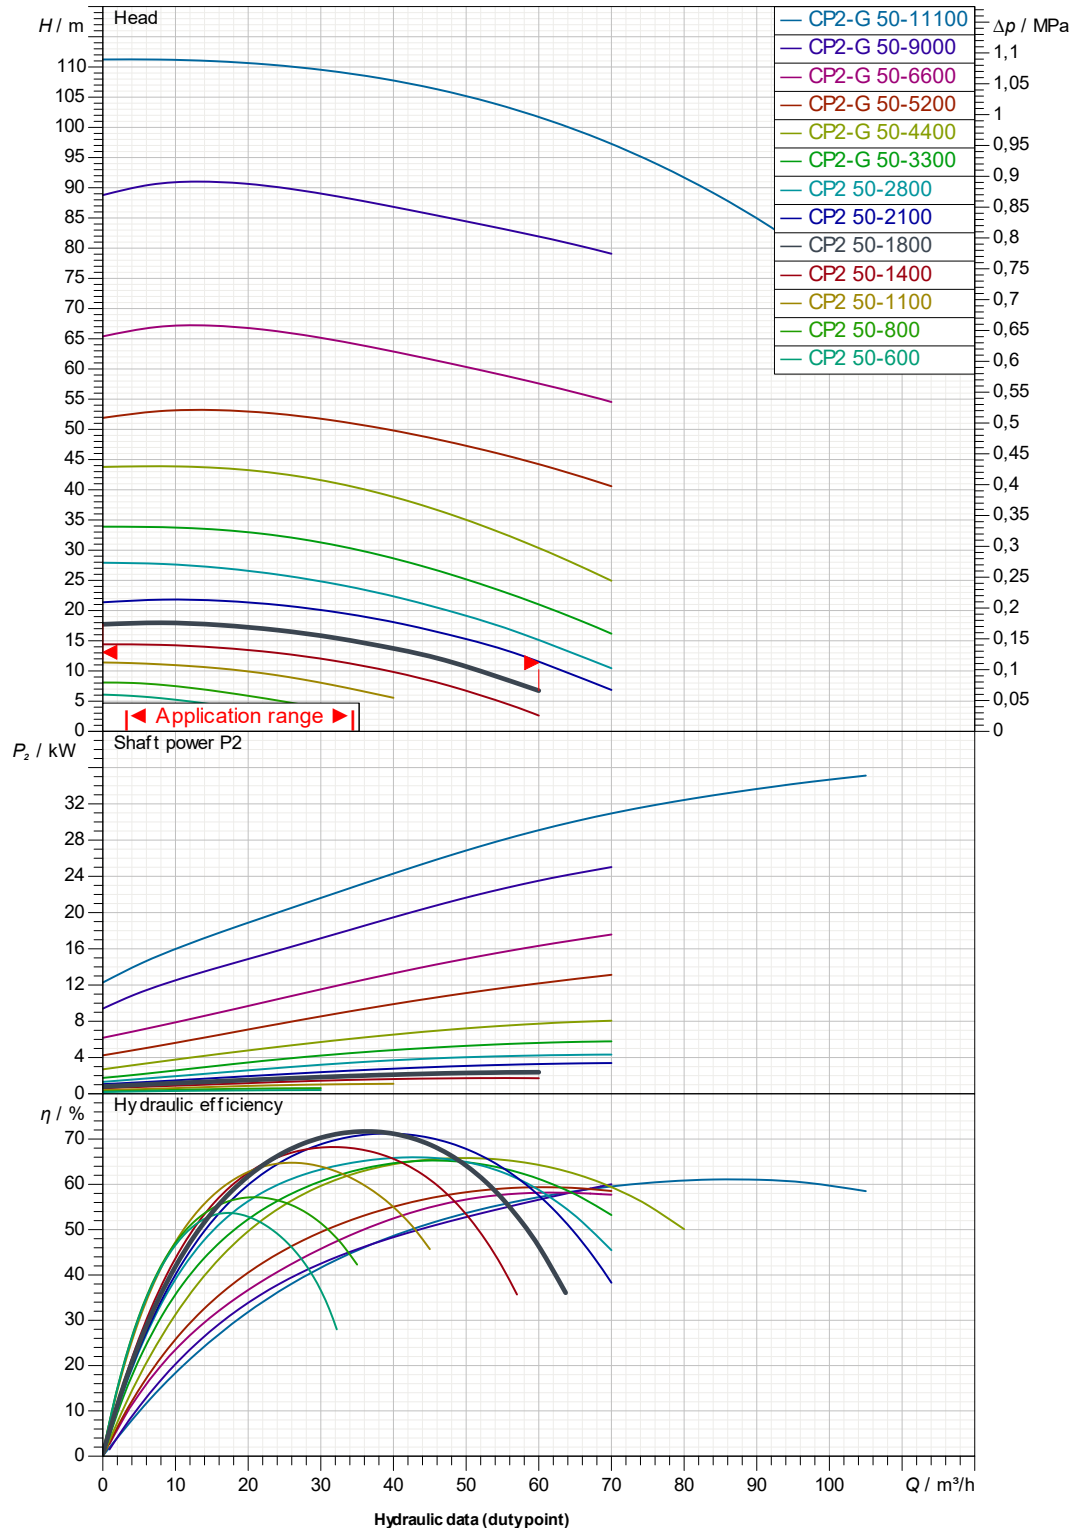

Suction side :
DN 50
PN10, PN16

Discharge side :
DN 50
PN10, PN16

Flow :

Head :

Rated speed :
2.910 1/min

MAIN_PROJECT_TITLE

BUSINESS_PROCESS_ID

OWNER_

ISSUE_DATE

2025-07-07



DIMENSIONAL DRAWING

2025-07-07

Page 3 / 3




DAB PUMPS S.p.A.
Via Marco Polo, 14 - 35035 Mestrino (PD), Italy
Tel. +39 049 5125000 - Fax +39 049 5125950
www.dabpumps.com

Receiver

From

Company
Reference
Address
Phone
Fax
E-mail

CP2 50-1800 T

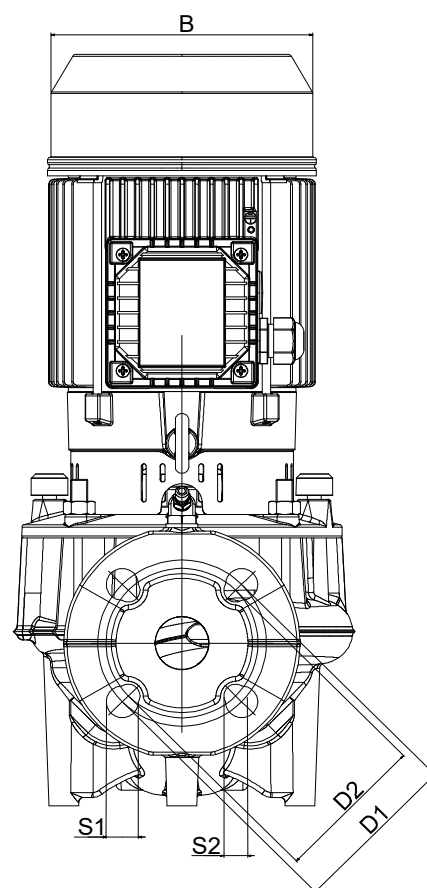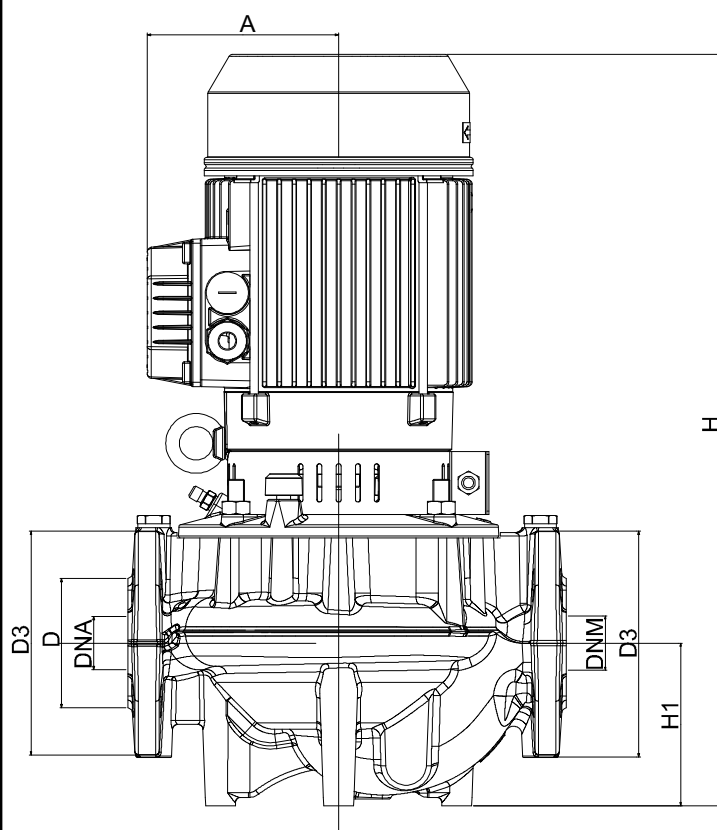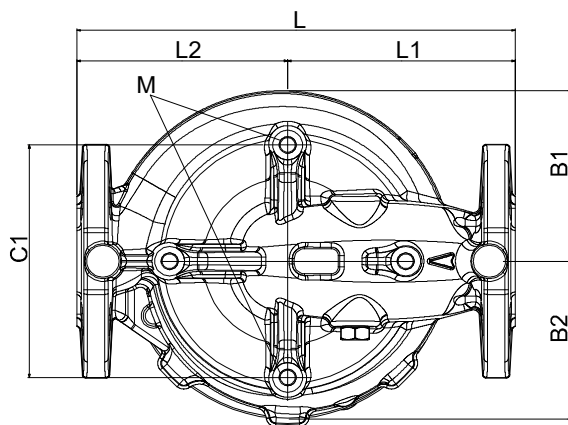

Dimensions in mm

Pump connection

1	A	118	H	497			
2	B	155	H1	73			Suction
3	B1	112,3	L	280			DN 50
4	B2	96	L1	140			PN10, PN16
5	C1	100	L2	140			
6	D	90	M	10			Discharge
7	D1	125	S1	23,3			DN 50
8	D2	110	S2	18			PN10, PN16
9	D3	165					
10	DNA	50					
11	DNM	50					

MAIN_PROJECT_TITLE

BUSINESS_PROCESS_ID

OWNER_

ISSUE_DATE

2025-07-07