

Receiver

Company
Reference
Address
Phone
Fax
E-mail

From

Item n° :
60196489

Customer pos. no.:

Model :
DTRON2 X 45/90 M 15 m + KIT

Pump data

Free passage : 2 mm
Aspiration level minimum : 110 mm
Min. fluid temperature : 0 °C
Max. fluid temperature : 50 °C
Max. Ambient temperature : 50 °C

Requested data

Flow :
Head :
Fluid : Water
Fluid Temperature : 20 °C
Density : 998,3 kg/m³
Kinematic viscosity : 1,005 mm²/s
Vapor pressure : 0,00234 MPa



Hydraulic data (duty point)

Flow :
Head :

Materials

Handle : Technopolymer
Pump body : Technopolymer
Impeller : Technopolymer/AISI 304
O-Ring : NBR
Motor shaft : Stainless Steel AISI 303
Motor liner : Stainless Steel AISI 304
Filter : Technopolymer

Curve tolerance according to ISO 9906

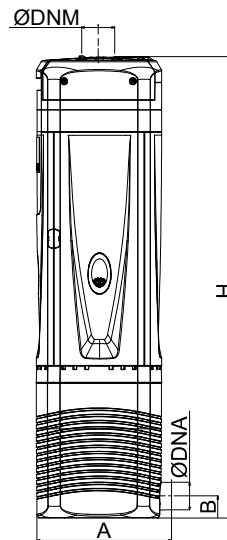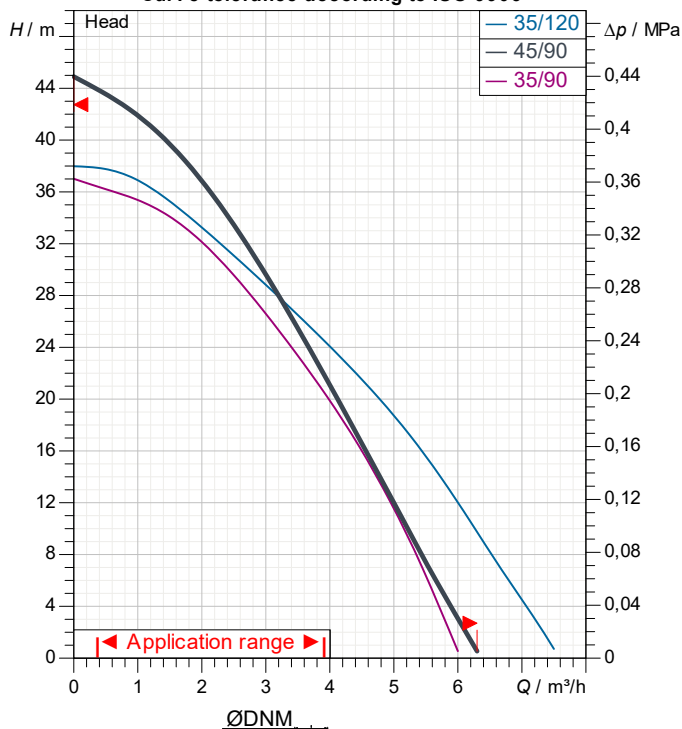

Motor data

Motor brand : DAB
Nominal power P2 : 0,6 kW
Rated voltage : 1~ 220-240 V 50 Hz
Nominal current : 4,2 A
Degree of protection : IP 68
Cable length m : 15 m

Weight : 11,5 kg

Dimensions in mm

A	195				
B	32				
H	636				

Pump connection

Suction side : /
Discharge side : 1" 1/4 G-F / --


Receiver

From

Company
Reference
Address
Phone
Fax
E-mail

DTRON2 X 45/90 M 15 m + KIT

Curve tolerance according to ISO 9906

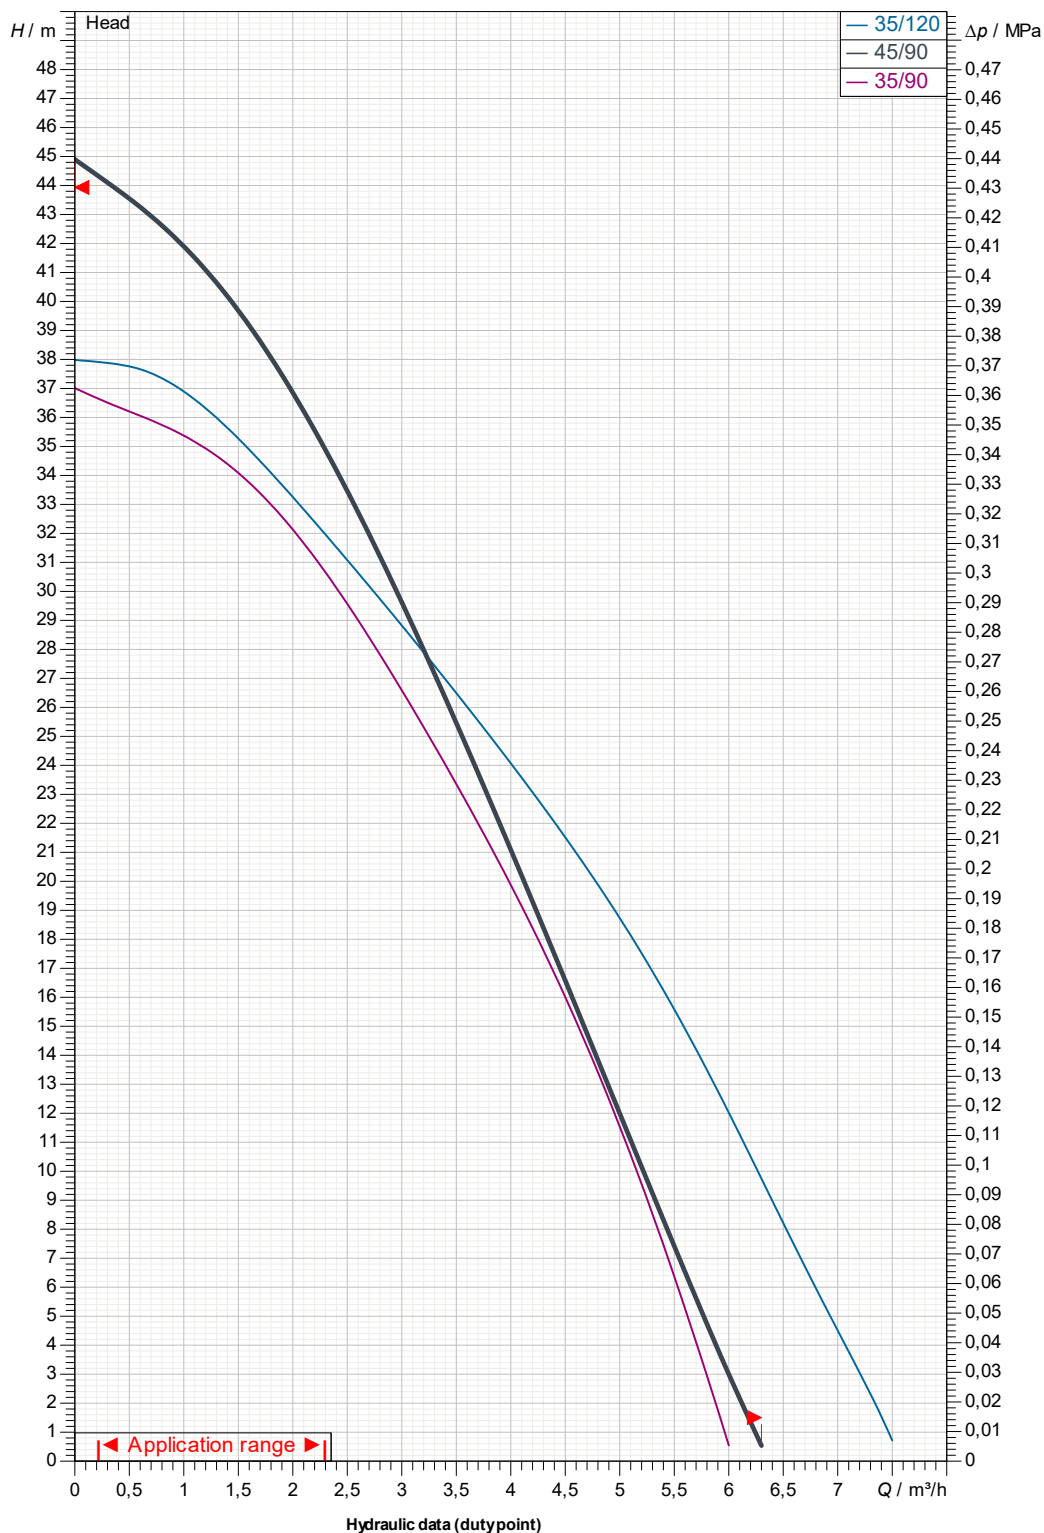

Suction side :

Discharge side :
1" 1/4 G-F
--

Flow :

Head :

Rated speed :
2.800 1/min

MAIN_PROJECT_TITLE

BUSINESS_PROCESS_ID

OWNER_

ISSUE_DATE

2025-09-16

